



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Conductor marking collar - UCT-WMS 3,2 (12X4) RD - 0830199

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Conductor marking collar, Sheet, red, unlabeled, can be labeled with: THERMOMARK CARD, BLUEMARK CLED, BLUEMARK LED, TOPMARK LASER, Mounting type: slide on, for terminal block width: 5.2 mm, Cable diameter: 1.5-3.2 mm, Lettering field: 12 x 4 mm

Product Features

- ✓ The UCT-WMS ... UniCard labeling range includes markers that can be threaded onto conductors
- ✓ The markers, which are supplied in uniform sheets, can be labeled quickly and easily using the THERMOMARK CARD and the BLUEMARK LED
- ✓ The sheets provide space for including function texts
- ✓ The markers support multi-line labeling



Key commercial data

| | |
|--------------------------------------|----------|
| Packing unit | 1 pc |
| Minimum order quantity | 8 pc |
| Weight per Piece (excluding packing) | 12.0 GRM |
| Custom tariff number | 39269097 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|------------|--------|
| Length (b) | 12 mm |
| Height | 5.8 mm |
| Width (a) | 4.3 mm |

Ambient conditions

| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 120 °C |
|---------------------------------|-------------------|

General

| | |
|------------|-------------------------------------|
| Note | Can be labeled via thermal transfer |
| Color | red |
| Components | free from silicone and halogen |

Conductor marking collar - UCT-WMS 3,2 (12X4) RD - 0830199

Technical data

General

| | |
|---|-------------------------------------|
| Inflammability class according to UL 94 | V0 |
| Material | PC V0 |
| Wipe resistance | DIN EN 61010-1 (VDE 0411-1) |
| Number of individual labels | 55 |
| Number of individual labels per row | 11 |
| RoHS compliant | Yes |
| Printability | Thermal transfer |
| | Inkjet printing |
| Device | 5146464 THERMOMARK CARD |
| | 5147888 BLUEMARK LED |
| | 5147999 BLUEMARK CLED |
| Ink ribbon | 5146613 THERMOMARK CARD-UCT-MAG3 |
| | 0801371 THERMOMARK-RIBBON 110-TC |
| | 5147421 BLUEMARK FLUID-CARTRIDGE |
| | 5146662 BLUEMARK CLED-FLUID-CARTR. |
| Test for substances that would hinder coating with paint or varnish | VW PV 3.10.7:2005-02 |
| Result | Test passed |
| Test specification weathering-resistance | Following ISO 4892-2:2013-03 |
| Test duration | 96 h |
| Wipe resistance test result | Test passed |
| Salt spray test specification | DIN EN 60068-2-11:2000-02 |
| Test duration | 96 h |
| Salt spray testing result | Test passed |
| Alternating condensation climate with SO2 test specification | DIN 50018:2013-05 |
| Climate level | AHT 1.0 S |
| Cycles | 2 |
| Condensation test result | Test passed |
| Wipe resistance of test specification inscriptions | DIN EN 61010-1 (VDE 0411-1):2011-07 |
| Result | Test passed |
| Marking mounting type | slide on |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 24190208 |
| eCl@ss 4.1 | 24190208 |
| eCl@ss 5.0 | 27149103 |

Conductor marking collar - UCT-WMS 3,2 (12X4) RD - 0830199

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 5.1 | 27400401 |
| eCl@ss 6.0 | 27400401 |
| eCl@ss 7.0 | 27400401 |
| eCl@ss 8.0 | 27400401 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000761 |
| ETIM 4.0 | EC001530 |
| ETIM 5.0 | EC001530 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11 | 39121410 |
| UNSPSC 12.01 | 39121410 |
| UNSPSC 13.2 | 39121410 |

Accessories

Accessories

Magazine

Magazine - THERMOMARK CARD-UCT-MAG3 - 5146613



Magazine for the THERMOMARK CARD printer, for accommodating UCT sheets (UCT-WMS...)

Magazine - P1 UC-MAG 7 - 5146568



Magazine, for CMS-P1-PLOTTER, for accommodating: UC-WMCO...

Drawings

Conductor marking collar - UCT-WMS 3,2 (12X4) RD - 0830199

Feature photo

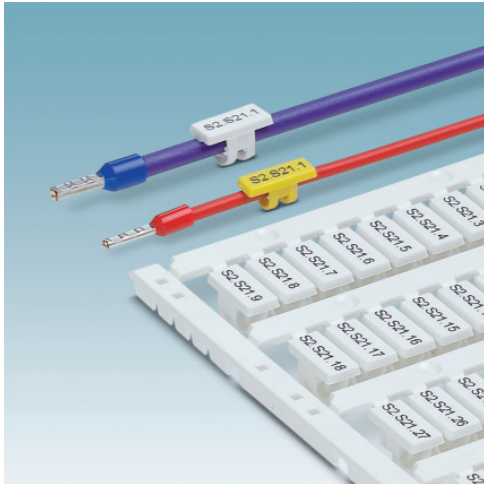


Figure may contain other products.

Feature photo

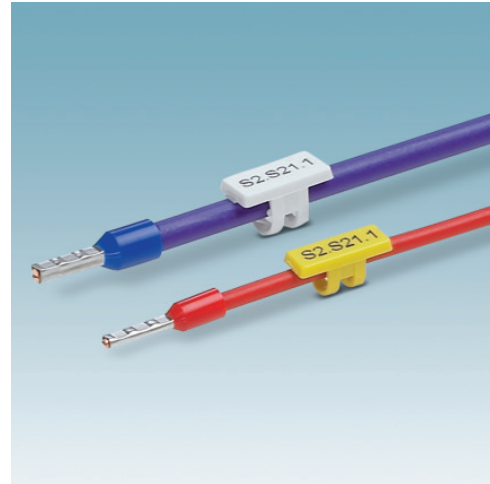


Figure may contain other products.

Feature photo

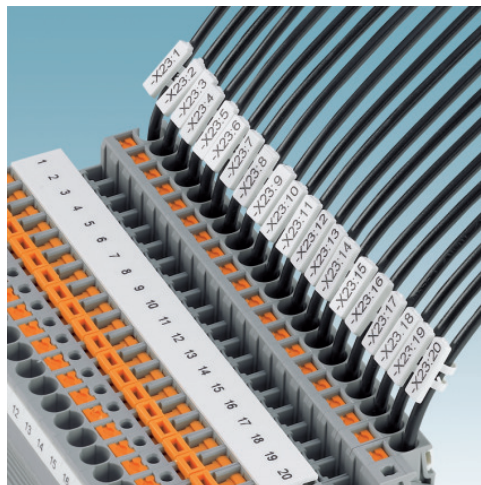


Figure may contain other products.