



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## SPSDEVK1MT-GEVK: Getting Started Guide

### Introduction;

The SPSDEVK1MT Predictive Maintenance Turnkey Solution kit enables fast installation of full Smart Passive Sensor™ systems. This evaluation kit includes:

- SPSDEVR1–8 UHF SPS Reader
- 2 SPS1DEVA1–W UHF Antennas w/ RF cables
- 20 SPSxT001PCB Temperature Sensors
- 20 SPSxT001PET Temperature Sensors
- 20 SPSxM001FOM Moisture Sensors
- 20 SPSxT001CER Temperature Sensors
- 20 SPSxTM01PET Moisture Sensors
- 12 V DC Universal Power Supply
- Ethernet Cable

Note: Frequency band of sensor tags is determined by version of kit ordered.

### Software Tools

ON Semiconductor has developed an application specifically for reading Smart Passive Sensors that unlocks the full functionality of the tags. This is done by automatically detecting the type of tag and reading back sensor data over time graphically. This application is known as TagReader and can be found on this kit's landing page under "Software".



**ON Semiconductor®**

[www.onsemi.com](http://www.onsemi.com)

## APPLICATION NOTE



**Figure 1. Turnkey Solution Kit Components**



**Figure 2. SPSDEVK1MT-GEVK Hardware Setup**

## Hardware Setup

The SPSDEVK1MT requires three hardware connections to be made in the following order:

- Connect at least one antenna to the RF SMA port on the SPSDEV1–8 reader
- Connect a USB or Ethernet cable from the SPSDEV1–8 to the host computer that will be running the application software
- Plug in the 12 VDC supply that was included with the kit

Note: please refer to SPS tag and antenna datasheets to verify optimal positioning of each to achieve best results.

## TagReader Software Setup

Once the reader is connected and the correct drivers are installed, please run the TagReader application downloaded from the ON Semiconductor website. Figure 3 shows the

setup screen that will open when the TagReader application is run. The ON Semiconductor SPSDEV1–8 will be autodetected and should be displayed in the “Select Reader” drop-down menu. If the drop-down menu is empty, confirm that the reader is powered on and the USB/Ethernet is connected to the host PC and click the “Rescan Readers” button.

With “ON Semiconductor SPSDEV1–8” selected, please select the antenna port(s) that the antenna(s) is connected to as well as the correct UHF region for your location (North America, Europe, etc). The rest of the settings will depend on the test environment and the type of tags being used and will be discussed further in the next section. When the settings are finalized, click “Read” and tag information will begin being displayed under the “Tags” tab as shown in Figure 4 on the next page.

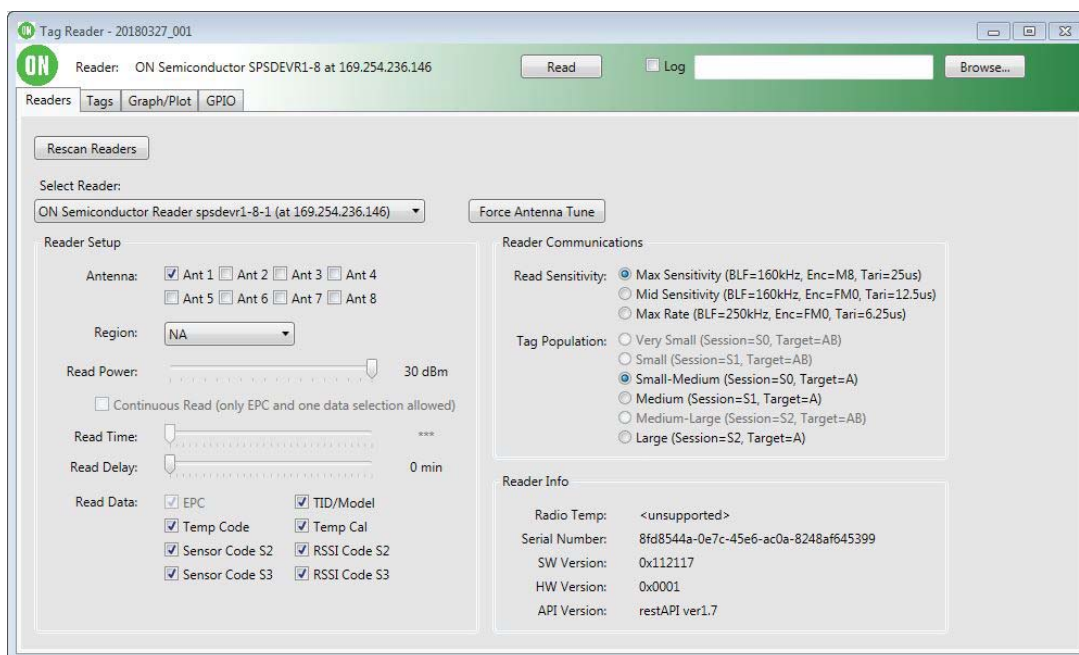


Figure 3. TagReader Setup Screen

### Advanced Reader Settings Descriptions

**Read Power** – maximum transmit power is set by which region is used, power may need to be reduced if sensors appear to be overpowered.

**Read Time** – defines how long the reader will look for sensors each cycle. Default value of 150 ms is good for small amounts of sensors while using a single antenna.


**Read Delay** – delay inserted between read cycles. Useful for reducing power consumption if only occasional reads are required.

**Read Data** – select the information that is of interest in the particular application. Sensor codes are used for moisture and pressure measurements and are read differently

depending on the generation of Magnus chip used (S2 or S3). Please refer to the datasheet of the particular sensor to verify which version is being used.

**Read Sensitivity** – the UHF protocol can be optimized to either maximize sensitivity or read rate. If tags are placed far from the reader, higher sensitivity will be required. If all tags are near the reader, the sampling rate of the sensor data can be increased without having to worry about missing distant, less sensitive sensors.

**Tag Population** – another performance tuning parameter similar to Read Sensitivity. UHF protocol can be optimized to work with different tag population sizes, ranging from Very Small (a handful of tags) to Large (50+ tags).

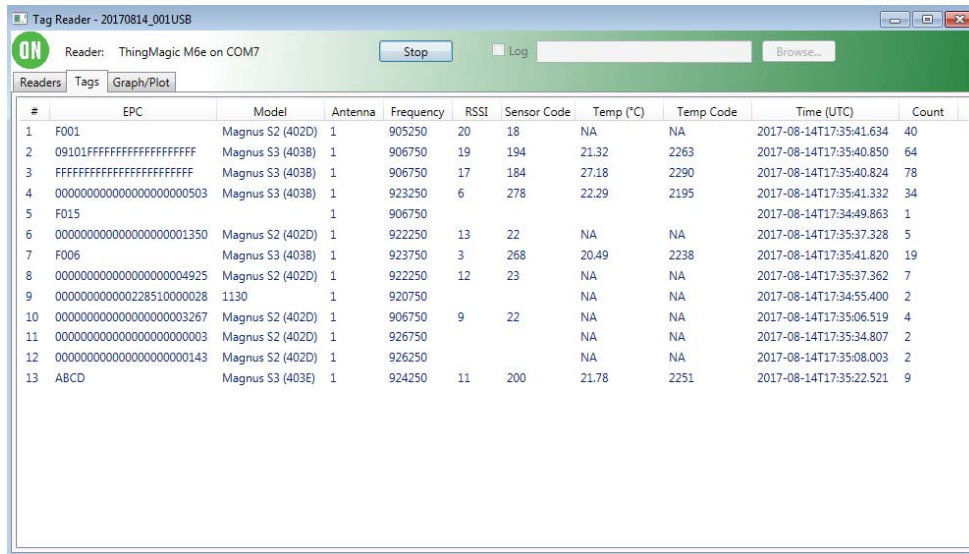

The screenshot shows the 'Tag Reader - 20170814\_001USB' window. The 'Tags' tab is selected, displaying a table of sensor data. The table has columns for #, EPC, Model, Antenna, Frequency, RSSI, Sensor Code, Temp (°C), Temp Code, Time (UTC), and Count. The data is as follows:

#	EPC	Model	Antenna	Frequency	RSSI	Sensor Code	Temp (°C)	Temp Code	Time (UTC)	Count
1	F001	Magnus S2 (402D)	1	905250	20	18	NA	NA	2017-08-14T17:35:41.634	40
2	09101FFFFFFFFFFFFFFFFF	Magnus S3 (403B)	1	906750	19	194	21.32	2263	2017-08-14T17:35:40.850	64
3	FFFFFFFFFFFFFFFFFFFFFF	Magnus S3 (403B)	1	906750	17	184	27.18	2290	2017-08-14T17:35:40.824	78
4	0000000000000000000000503	Magnus S3 (403B)	1	923250	6	278	22.29	2195	2017-08-14T17:35:41.332	34
5	F015		1	906750					2017-08-14T17:34:49.863	1
6	00000000000000000000001350	Magnus S2 (402D)	1	922250	13	22	NA	NA	2017-08-14T17:35:37.328	5
7	F006	Magnus S3 (403B)	1	923750	3	268	20.49	2238	2017-08-14T17:35:41.820	19
8	00000000000000000000004925	Magnus S2 (402D)	1	922250	12	23	NA	NA	2017-08-14T17:35:37.362	7
9	00000000000002285100000028	1130	1	920750			NA	NA	2017-08-14T17:34:55.400	2
10	00000000000000000000003267	Magnus S2 (402D)	1	906750	9	22	NA	NA	2017-08-14T17:35:06.519	4
11	00000000000000000000000003	Magnus S2 (402D)	1	926750			NA	NA	2017-08-14T17:35:34.807	2
12	000000000000000000000000143	Magnus S2 (402D)	1	926250			NA	NA	2017-08-14T17:35:08.003	2
13	ABCD	Magnus S3 (403E)	1	924250	11	200	21.78	2251	2017-08-14T17:35:22.521	9

Figure 4. Sensor Information Displayed Under “Tags” Tab

## Data Collection and Logging

The TagReader application offers two additional ways to view the SPS sense data. In the Graph/Plot tab, tags can be selected by EPC code and the sensor data can be viewed over time. Figure 5 shows four unique tags' temperature plotted over time (scaling makes measurements look noisy, but all temperature stay within a 1°C window).

The second way to view data is by setting up a Log File using the “Browse” button at the top of application and checking the “Log” checkbox. This will dump all the information collected during the session to a logfile including EPC, sensor code, timestamp, etc.

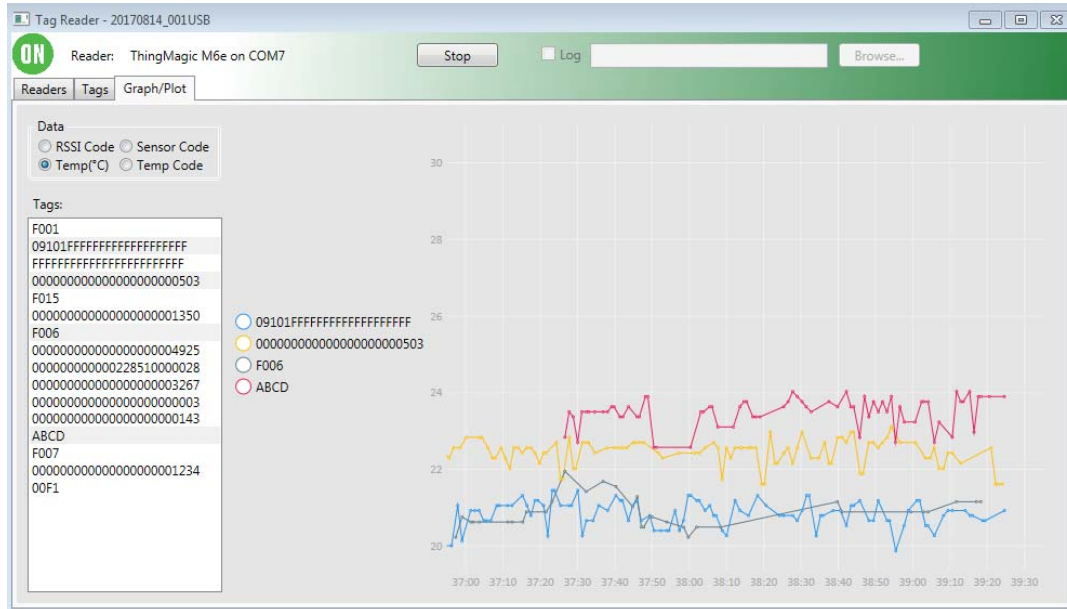



Figure 5. Sensor Information Displayed Under “Graph/Plot” Tab

Smart Passive Sensor is a trademark of RFMicron, Inc.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marketing.pdf](http://www.onsemi.com/site/pdf/Patent-Marketing.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada  
Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative