



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

10W AUDIO AMPLIFIER WITH MUTING

DESCRIPTION

The TDA 1910 is a monolithic integrated circuit in MULTIWATT® package, intended for use in Hi-Fi audio power applications, as high quality TV sets.


The TDA 1910 meets the DIN 45500 ($d = 0.5\%$) guaranteed output power of 10W when used at 24V/4W. At 24V/8W the output power is 7W min.

Features:

- muting facility
- protection against chip over temperature
- very low noise
- high supply voltage rejection
- low "switch-on" noise.

The TDA 1910 is assembled in MULTIWATT® package that offers:

- easy assembly
- simple heatsink
- space and cost saving
- high reliability

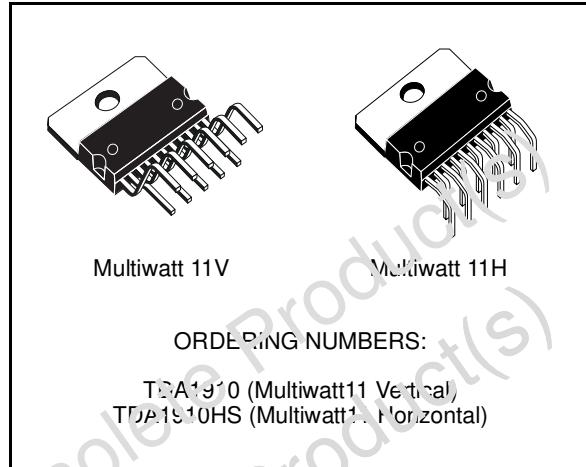


ORDERING NUMBERS:

TDA1910 (Multiwatt11 Vertical)
TDA1910HS (Multiwatt11 Horizontal)

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_s	Supply voltage	30	V
I_o	Output peak current (non repetitive)	3.5	A
I_o	Output peak current (repetitive)	3.0	A
V_i	Input voltage	0 to $+ V_s$	V
V_i	Differential input voltage	± 7	V
V_{11}	Muting threshold voltage	V_s	V
P_{tot}	Power dissipation at $T_{casf} = 90^\circ\text{C}$	20	W
T_{stc}	Storage and junction temperature	-40 to 150	$^\circ\text{C}$


TEST CIRCUIT

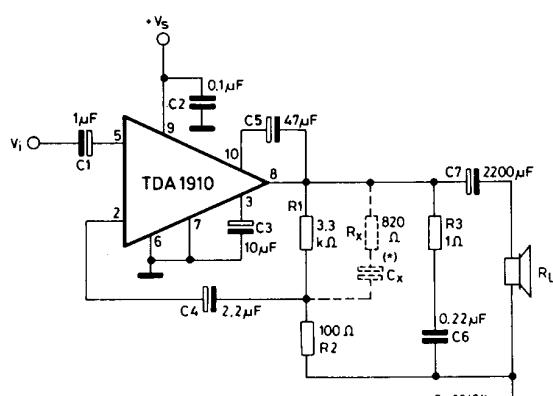


(*) See fig. 13.

TDA1910


PIN CONNECTION (Top view)

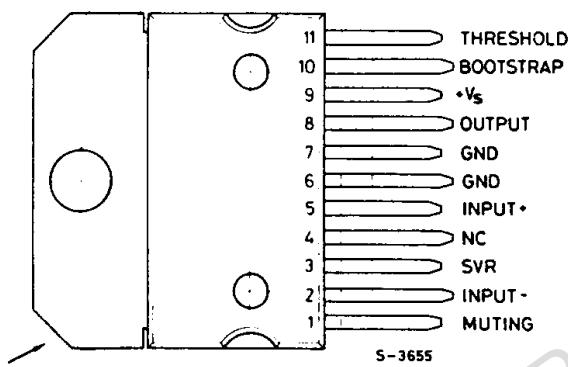


SCHEMATIC DIAGRAM

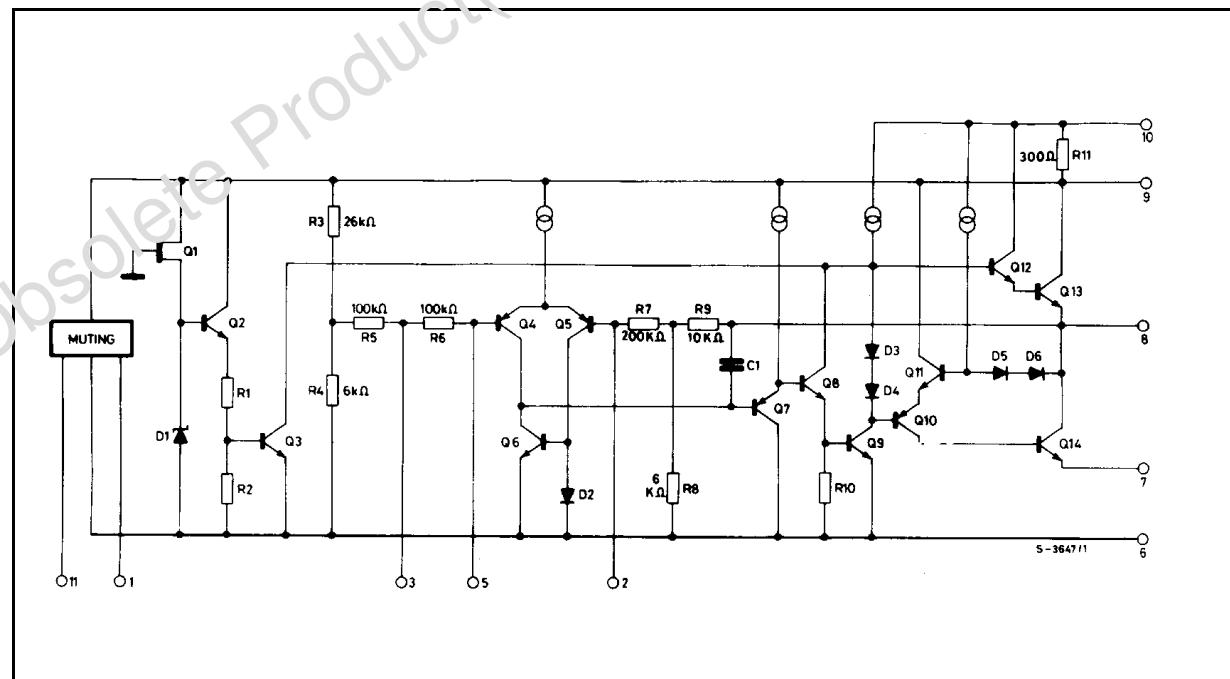

TEST CIRCUIT

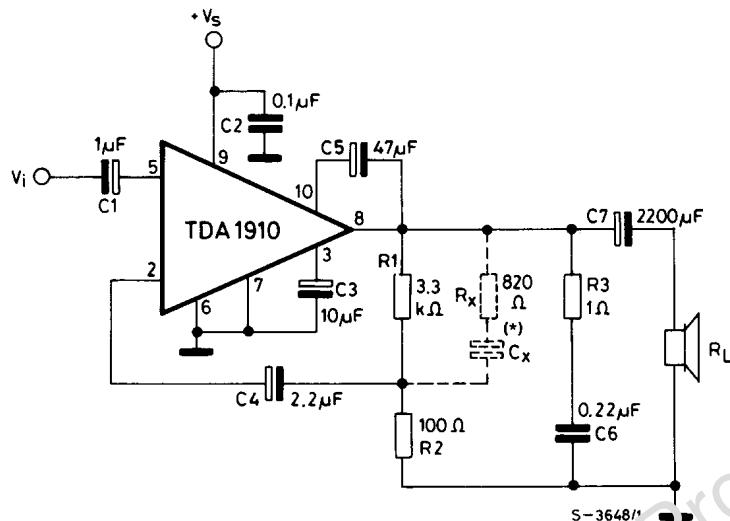

MUTING CIRCUIT

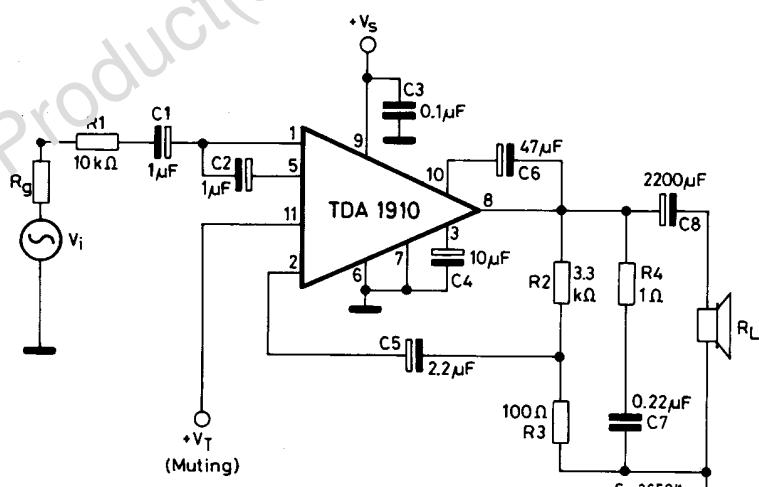

THERMAL DATA

Symbol	Parameter	Value	Unit
$R_{th\ j\text{-case}}$	Thermal resistance junction-case	max	3 °C/W

ELECTRICAL CHARACTERISTICS (Refer to the test circuit, $T_{amb} = 25^\circ C$, $R_{th\ (heatsink)} = 4^\circ C/W$, unless otherwise specified)

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
V_s	Supply voltage		8		30	V
V_o	Quiescent output voltage	$V_s = 18V$ $V_s = 24V$	8.3 11.5	9.2 12.4	10 13.4	V
I_d	Quiescent drain current	$V_s = 18V$ $V_s = 24V$		19 27	32 35	mA
$V_{CE\ sat}$	Output stage saturation voltage	$I_C = 2A$		1		V
		$I_C = 3A$		1.6		
P_o	Output power	$d = 0.5\%$ $V_s = 18V$ $V_s = 24V$ $V_s = 24V$	$f = 40 \text{ to } 15,000\text{Hz}$ $R_L = 4\Omega$ $R_L = 4\Omega$ $R_L = 8\Omega$	6.5 10 7	7 12 7.5	W
		$d = 10\%$ $V_s = 18V$ $V_s = 24V$ $V_s = 24V$	$f = 1\text{ KHz}$ $R_L = 4\Omega$ $R_L = 4\Omega$ $R_L = 8\Omega$	8.5 15 9	9.5 17 10	
d	Harmonic distortion	$f = 40 \text{ to } 15,000\text{ Hz}$ $V_s = 18V$ $V_s = 24V$ $V_s = 24V$	$R_L = 4\Omega$ $P_o = 50\text{ mW to } 6.5W$ $R_L = 4\Omega$ $P_o = 50\text{ mW to } 10W$ $R_L = 8\Omega$ $P_o = 50\text{ mW to } 7W$		0.2 0.2 0.2	0.5 0.5 0.5
d	Intermodulation distortion	$V_s = 24V$ $f_1 = 250\text{ Hz}$	$R_L = 4\Omega$ $P_o = 10W$ $f_2 = 8\text{ KHz}$ (DIN 45500)		0.2	%
V_i	Input sensitivity	$F = 1\text{ KHz}$, $V_s = 18V$ $V_s = 24V$ $V_s = 24V$	$R_L = 4\Omega$ $P_o = 7\text{ W}$ $R_L = 4\Omega$ $P_o = 12\text{ W}$ $R_L = 8\Omega$ $P_o = 7.5W$		170 220 245	mV
V_i	Input saturation voltage (rms)	$V_s = 18V$ $V_s = 24V$		1.8 2.4		V
R_i	Input resistance (pin 5)	$f = 1\text{ KHz}$		60	100	KΩ
I_d	Drain current	$V_s = 24V$ $R_L = 4\Omega$ $R_L = 8\Omega$	$f = 1\text{ KHz}$ $P_o = 12W$ $P_o = 7.5W$		820 475	mA

ELECTRICAL CHARACTERISTICS (continued)

Symbol	Parameter	Test condition		Min.	Typ.	Max.	Unit	
h	Efficiency	$V_s = 24V$ $R_L = 4\Omega$ $R_L = 8\Omega$	$f = 1 \text{ KHz}$ $P_o = 12W$ $P_o = 7.5W$		62 65		%	
BW	Small signal bandwidth	$V_s = 24V$	$R_L = 4\Omega$	$P_o = 1W$	10 to 120,000		Hz	
BW	Power bandwidth	$V_s = 24V$ $P_o = 12W$	$R_L = 4\Omega$ $d \leq 5\%$		40 to 15,000		Hz	
G_v	Voltage gain (open loop)	$f = 1 \text{ KHz}$			75		dB	
G_v	Voltage gain (closed loop)	$V_s = 24V$ $f = 1 \text{ KHz}$	$R_L = 4\Omega$ $P_o = 1W$	29.5	30	30.5	dB	
e_N	Total input noise	$R_g = 50\Omega$ $R_g = 1K\Omega$ $R_g = 10K\Omega$			1.2 1.3 1.5	3.0 3.2 4.0	μV	
		$R_g = 50\Omega$ $R_g = 1K\Omega$ $R_g = 10K\Omega$			2.0 2.0 2.2	5.0 5.2 6.0	μV	
S/N	Signal to noise ratio	$V_s = 24V$ $P_o = 12W$ $R_L = 4\Omega$	$R_g = 10K\Omega$ $R_g = 0$	(°)	97	103 105		dB
			$R_g = 10K\Omega$ $R_g = 0$	(°°)	93	100 100		dB
SVR	Supply voltage rejection	$V_s = 24V$ $f_{apple} = 100 \text{ Hz}$	$R_L = 4\Omega$		50	60		dB
T_{sd}	Thermal shut-down case (*) temperature	$P_{tot} = 8W$			110	125		°C

MUTING FUNCTION (Refer to Muting circuit)

V_T	Muting-off threshold voltage (pin 11)		1.9		4.7	V
V_T	Muting-on threshold voltage (pin 11)		0		1.3	V
			6			
R_1	Input resistance (pin 1)	Muting off	80	200		$K\Omega$
		Muting on		10	30	Ω
R_{11}	Input resistance (pin 11)		150			$K\Omega$
A_T	Muting attenuation	$R_g + R_1 = 10 K\Omega$	50	60		dB

Note :

(°) Weighting filter = curve A.

(°°) Filter with noise bandwidth: 22 Hz to 22 KHz.

(*) See fig. 29 and fig. 30.

TDA1910

Figure 1. Quiescent output voltage vs. supply voltage

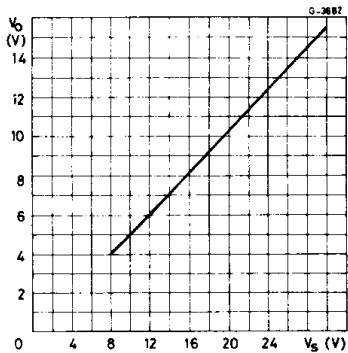


Figure 2. Quiescent drain current vs. supply voltage

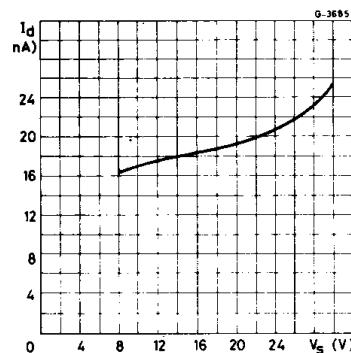


Figure 3. Open loop frequency response

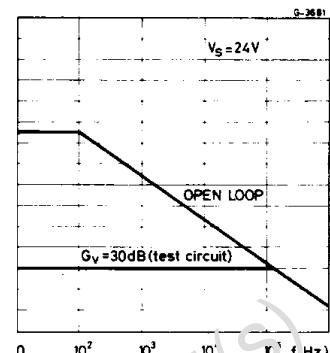


Figure 4. Output power vs. supply voltage

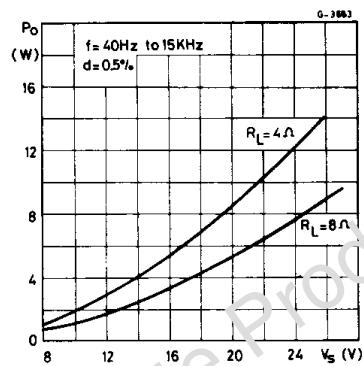


Figure 5. Output power vs. supply voltage

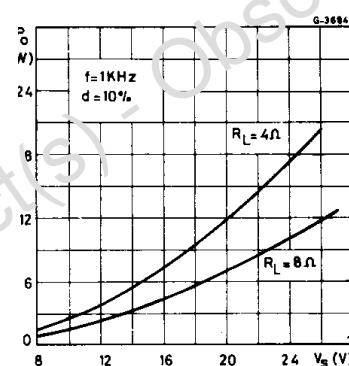


Figure 6. Distortion vs. output power

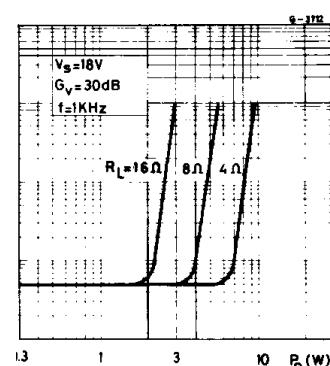


Figure 7. Distortion vs. output power

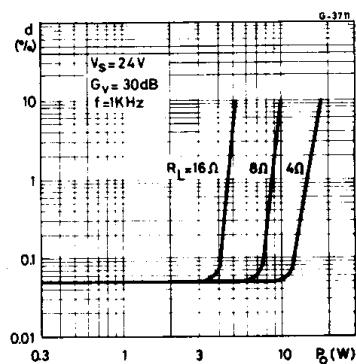


Figure 8. Output power vs. frequency

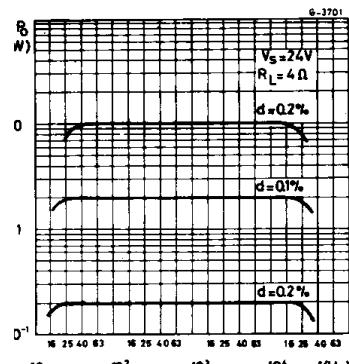


Figure 9. Output power vs. frequency

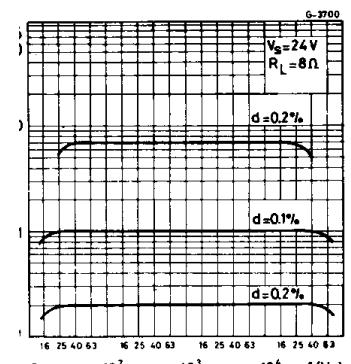


Figure 10. Output power vs. input voltage

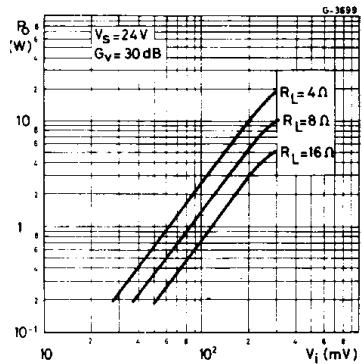


Figure 11. Output power vs. input voltage

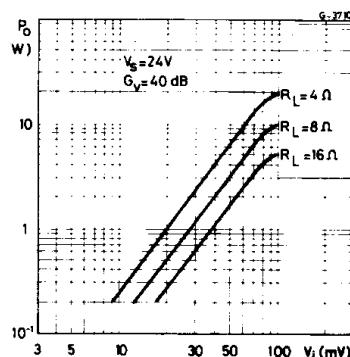


Figure 12. Total input noise vs. source resistance

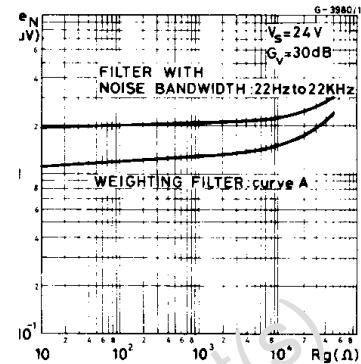


Figure 13. Values of capacitor Cx vs. bandwidth (BW) and gain (G_V)

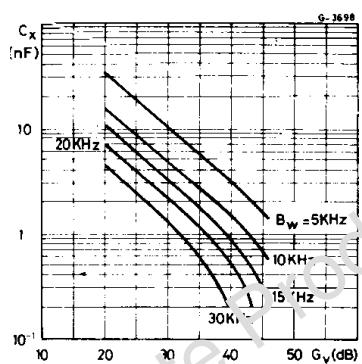


Figure 14. Supply voltage rejection vs. voltage gain

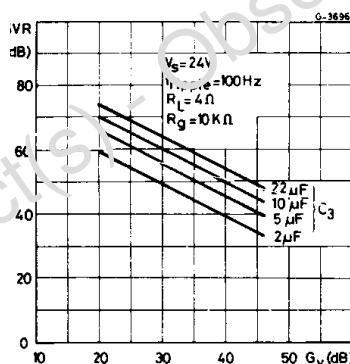


Figure 15. Supply voltage rejection vs. source resistance

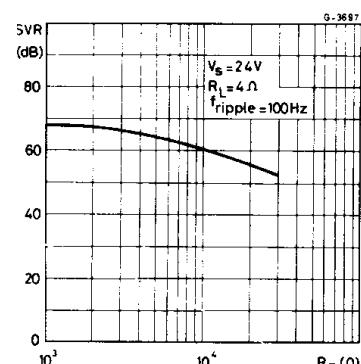


Figure 16. Power dissipation and efficiency vs. output power

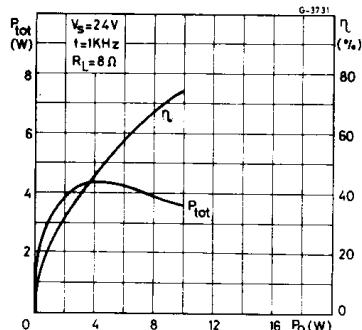


Figure 17. Power dissipation and efficiency vs. output power


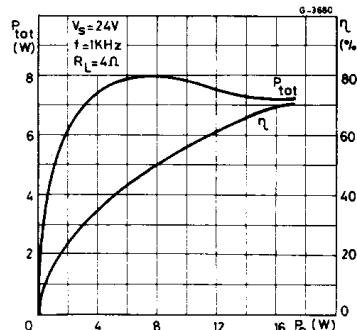


Figure 18. Max power dissipation vs. supply voltage



APPLICATION INFORMATION

Figure 19. Application circuit without muting

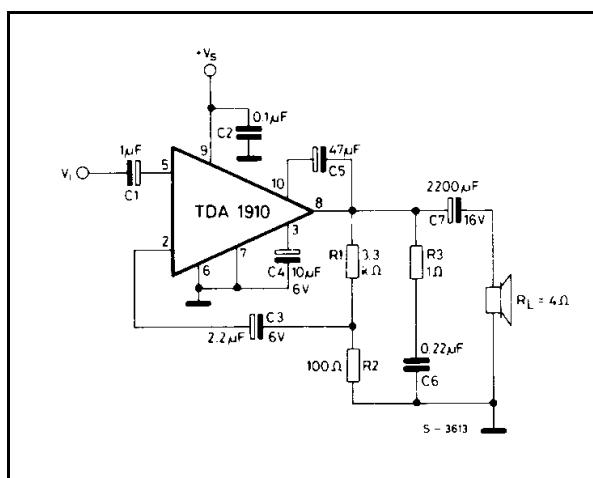


Figure 20. PC board and component lay-out of the circuit of fig. 19 (1:1 scale)


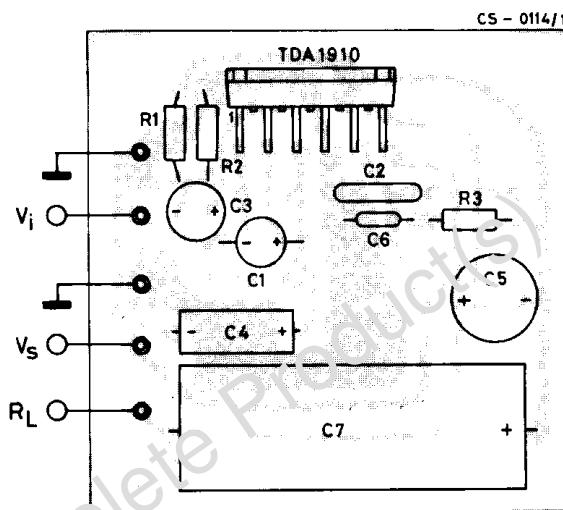


Figure 21. Application circuit with muting

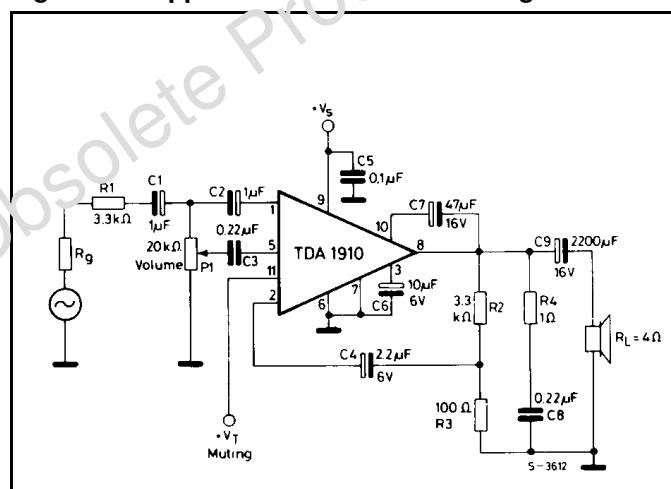

Performance (circuits of fig. 19 and 21)

$P_o = 12W$ (40 to 15000 Hz, $d \leq 0.5\%$)

$V_S = 24V$

$I_d = 0.82A$

$G_V = 30 dB$

APPLICATION INFORMATION (continued)

Figure 22. Two position DC tone control (10 dB boost 50 Hz and 20 KHz) using change of pin 1 resistance (muting function)

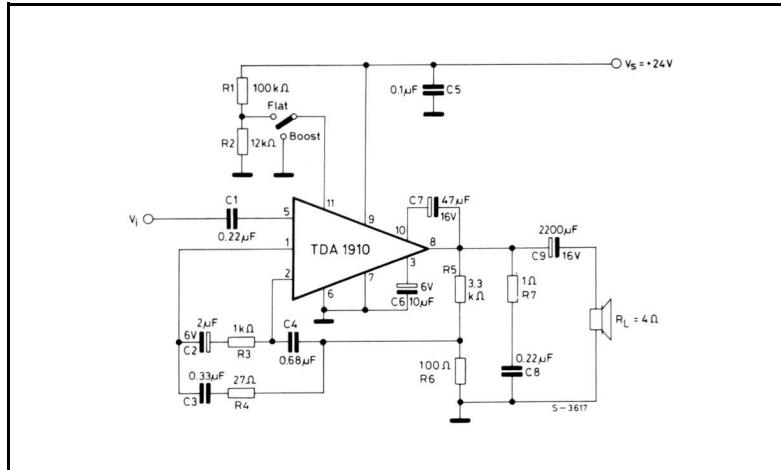


Figure 24. 10 dB 50 Hz boost tone control using change of pin 1 resistance (muting function)

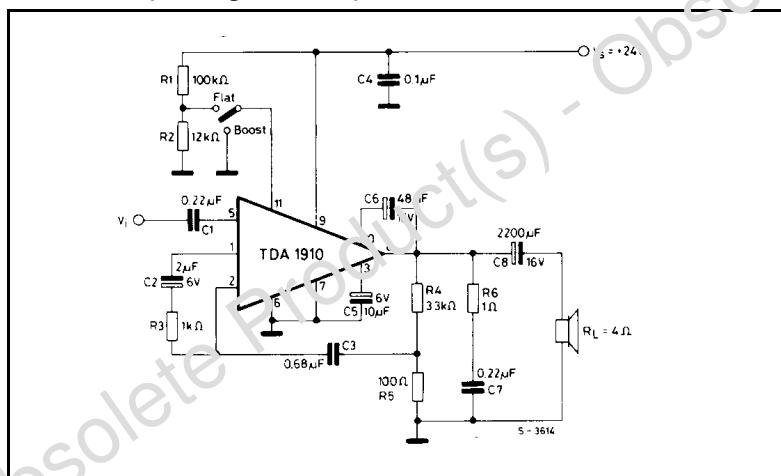


Figure 26. Squelch function in TV applications

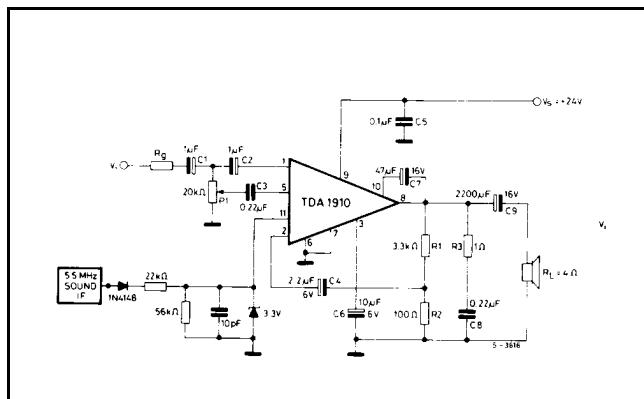


Figure 23. Frequency response of the circuit of fig. 22

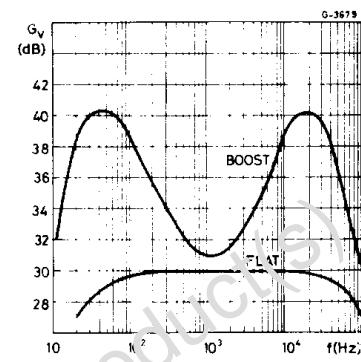


Figure 25. Frequency response of the circuit of fig. 24






Figure 27. Delayed muting circuit

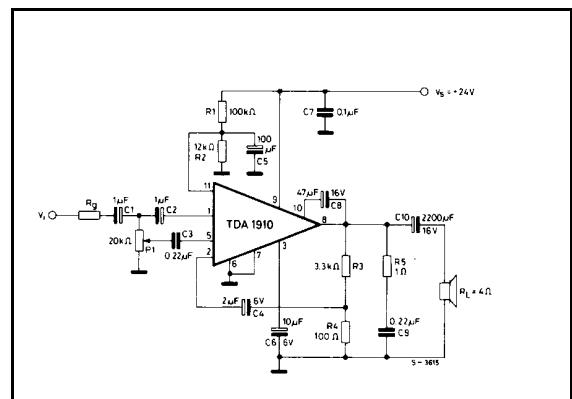

MUTING FUNCTION

The output signal can be inhibited applying a DC voltage V_T to pin 11, as shown in fig. 28


Figure 28

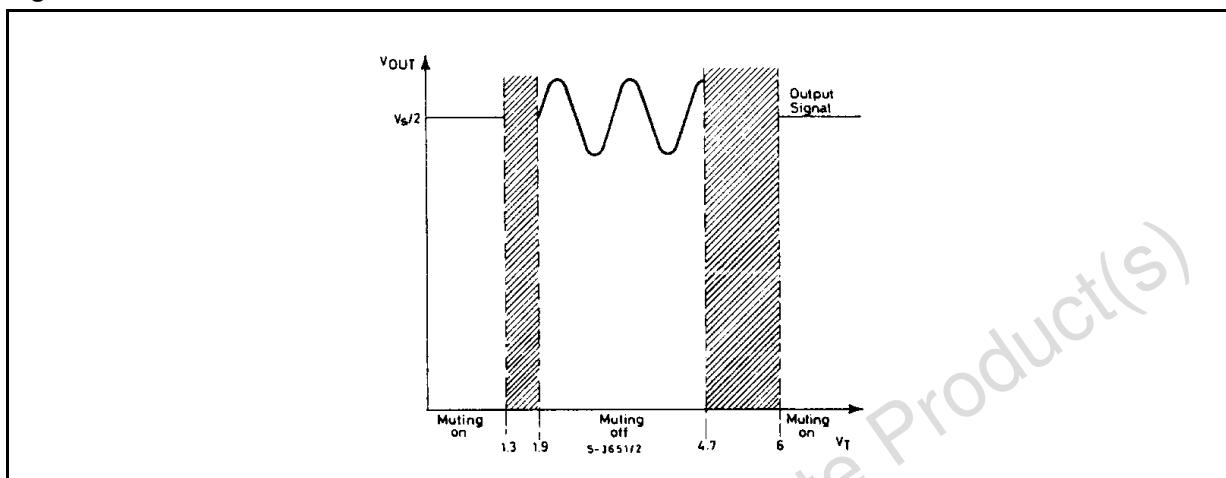

The input resistance at pin 1 depends on the threshold voltage V_T at pin 11 and is typically.

$R_1 = 200 \text{ k}\Omega$	@	$1.9V \leq V_T \leq 4.7V$	muting-off
$R_1 = 10 \Omega$	@	$0V \leq V_T \leq 1.3V$	muting-on

Referring to the following input stage, the possible attenuation of the input signal and therefore of the output signal can be found using the following expression.



$$A_T = \frac{V_i}{V_5} = \frac{R_g + R_5 // R_1}{R_5 // R_1}$$

where $R_5 \approx 100 \text{ k}\Omega$

Considering $R_g = 10 \text{ k}\Omega$ the attenuation in the muting-on condition is typically $A_T = 60 \text{ dB}$. In the muting-off condition, the attenuation is very low, typically 1.2 dB .

A very low current is necessary to drive the threshold voltage V_T because the input resistance at pin 11 is greater than $150 \text{ k}\Omega$. The muting function can be used in many cases, when a temporary inhibition of the output signal is requested, for example:

- in switch-on condition, to avoid preamplifier power-on transients (see fig. 27)

- during commutations at the input stages.
- during the receiver tuning.

The variable impedance capability at pin 1 can be useful in many applications and we have shown 2 examples in fig. 22 and 24, where it has been used to change the feedback network, obtaining 2 different frequency responses.

APPLICATION SUGGESTION

The recommended values of the components are those shown on application circuit of fig. 21. Different values can be used.

The following table can help the designer.

Component	Raccom. value	Purpose	Larger than recommended value	Smaller than recommended value	Allowed range	
					Min.	Max.
R _g + R ₁	10KΩ	Input signal imped. for muting operation	Increase of the attenuation in muting-on condition. Decrease of the input sensitivity.	Decrease of the attenuation in muting on condition.		
R ₂	3.3KΩ	Close loop gain setting.	Increase of gain.	Decrease of gain. Increase of escent current.	9 R ₃	
R ₃	100Ω	Close loop gain setting.	Decrease of gain.	Increase of gain.		R ₂ /9
R ₄	1Ω	Frequency stability	Danger of oscillation at high frequencies with inductive loads.			
P ₁	20KΩ	Volume potentiometer.	Increase of the switch-on noise.	Decrease of the input impedance and of the input level.	10KΩ	100KΩ
C ₁ C ₂ C ₃	1 μF 1 μF 0.22μF	Input DC decoupling.		Higher low frequency cutoff.		
C ₄	2.2μF	Inverting input DC decoupling.	Increase of the switch-on noise.	Higher low frequency cutoff.	0.1μF	
C ₅	0.1μF	Supply voltage bypass.		Danger of oscillations.		
C ₆	10μF	Ripple rejection.	Increase of SVR. Increase of the switch-on time	Degradation of SVR	2.2μF	100μF
C ₇	47μF	Bootstrap.		Increase of the distortion at low frequency.	10μF	100μF
C ₈	0.22μF	Frequency stability.		Danger of oscillation.		
C ₉	2200μF (R _L = 4Ω) 1000 μF (R _L = 8Ω)	Output DC decoupling.		Higher low frequency cutoff.		

THERMAL SHUT-DOWN

The presence of a thermal limiting circuit offers the following advantages:

- 1) An overload on the output (even if it is permanent), or an above limit ambient temperature can be easily supported since the T_j cannot be higher than 150°C .
- 2) The heatsink can have a smaller factor of safety compared with that of a conventional

circuit. There is no possibility of device damage due to high junction temperature.

If for any reason, the junction temperature increases up to 150°C , the thermal shut-down simply reduces the power dissipation and the current consumption.

The maximum allowable power dissipation depends upon the size of the external heatsink (i.e. its thermal resistance); fig. 31 shows this dissipable power as a function of ambient temperature for different thermal resistance.

Figure 29. Output power and drain current vs. case temperature

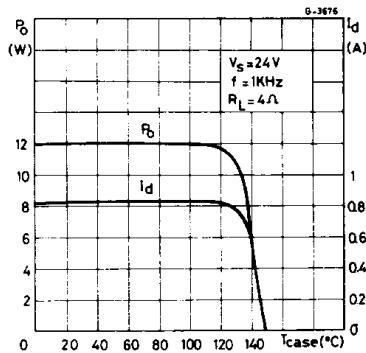


Figure 30. Output power and drain current vs. case temperature


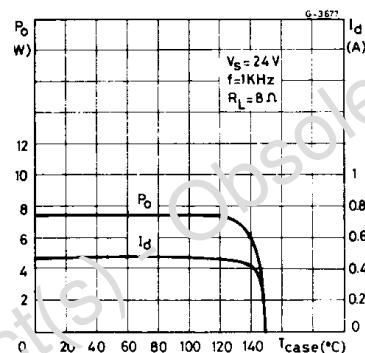


Figure 31. Maximum allowable power dissipation vs. ambient temperature

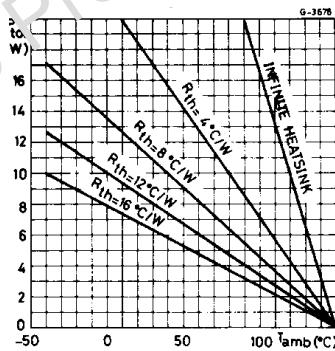

MOUNTING INSTRUCTIONS


The power dissipated in the circuit must be removed by adding an external heatsink.

Thanks to the Multiwatt® package attaching the heatsink is very simple, a screw or a compression


spring (clip) being sufficient. Between the heatsink and the package it is better to insert a layer of silicon grease, to optimize the thermal contact; no electrical isolation is needed between the two surfaces.

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			5			0.197
B			2.65			0.104
C			1.6			0.063
D		1			0.039	
E	0.49		0.55	0.019		0.022
F	0.88		0.95	0.035		0.037
G	1.45	1.7	1.95	0.057	0.067	0.077
G1	16.75	17	17.25	0.659	0.669	0.679
H1	19.6			0.772		
H2			20.2			0.795
L	21.9	22.2	22.5	0.862	0.874	0.886
L1	21.7	22.1	22.5	0.854	0.87	0.886
L2	17.4		18.1	0.685		0.713
L3	17.25	17.5	17.75	0.679	0.689	0.699
L4	10.3	10.7	10.9	0.406	0.421	0.429
L7	2.65		2.9	0.104		0.114
M	4.25	4.55	4.85	0.167	0.179	0.191
M1	4.73	5.08	5.43	0.186	0.200	0.214
S	1.9		2.6	0.075		0.102
S1	1.9		2.6	0.075		0.102
Dia1	3.65		3.85	0.144		0.152

OUTLINE AND MECHANICAL DATA

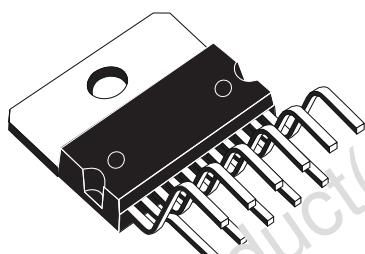


Multiwatt11 V

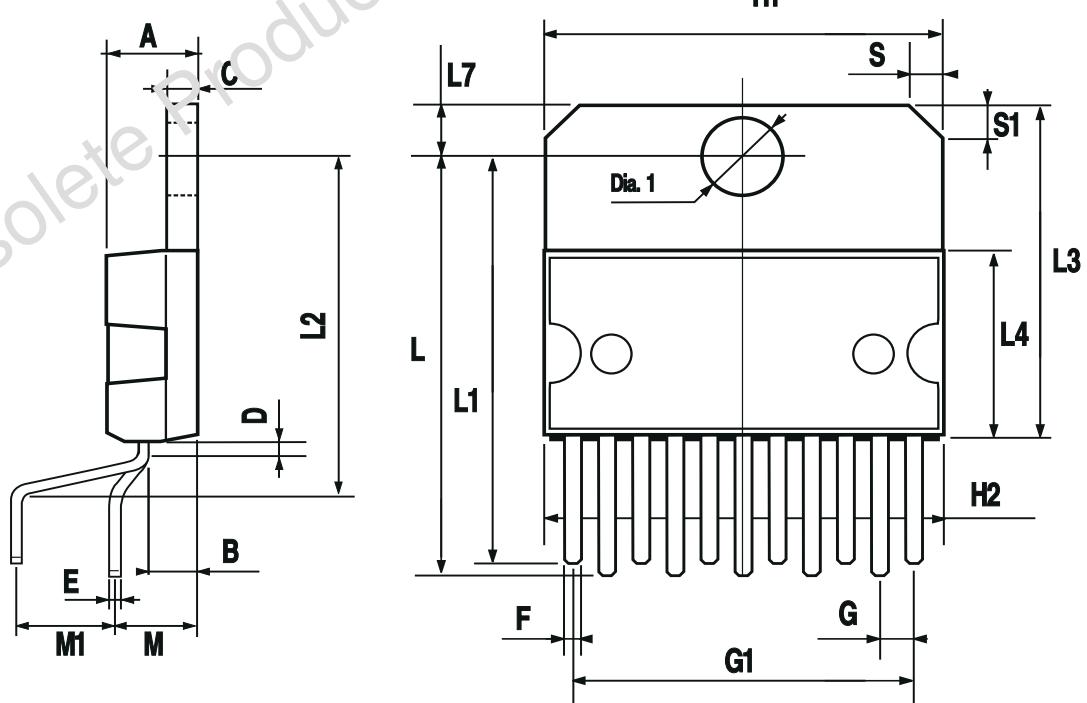


TDA1910

DIM.	mm			inch		
	MIN.	Typ.	MAX.	MIN.	Typ.	MAX.
A	4.373	4.5	4.627	0.172	0.177	0.182
B			2.65			0.104
C			1.6			0.063
E	0.49	0.515	0.55	0.019	0.020	0.022
E1	1.007	1.037	1.07	0.040	0.041	0.042
F	0.88	0.9	0.95	0.035	0.035	0.037
G	1.5	1.7	1.9	0.059	0.067	0.075
G1	16.82	17.02	17.22	0.662	0.670	0.678
G2	6.61	6.807	7.01	0.260	0.268	0.276
G3	13.41	13.61	13.81	0.528	0.536	13.810
G4	3.2	3.4	3.6	0.126	0.134	0.142
G5	10.01	10.21	10.41	0.394	0.402	0.410
H1	19.6			0.772		
H2			20.2			0.795
L1	19.28	19.58	19.88	0.759	0.771	0.783
L2	3.61	3.81	4.01	0.142	0.150	0.158
L3	17.25	17.5	17.75	0.679	0.689	0.699
L4	10.3	10.6	10.9	0.406	0.417	0.429
L5 (Inner)	3.4	3.75	4	0.134	0.148	0.157
L5 (Outer)	3.6	3.9	4.2	0.142	0.154	4.200
L7	2.65		2.9	0.104		0.114
R	0.75	1	1.25	0.030	0.039	0.049
S	1.9		2.6	0.075		0.102
S1	1.9		2.6	0.075		0.102
Dia1	3.65		3.85	0.144		0.152

OUTLINE AND MECHANICAL DATA



Multiwatt11 H (Short leads)

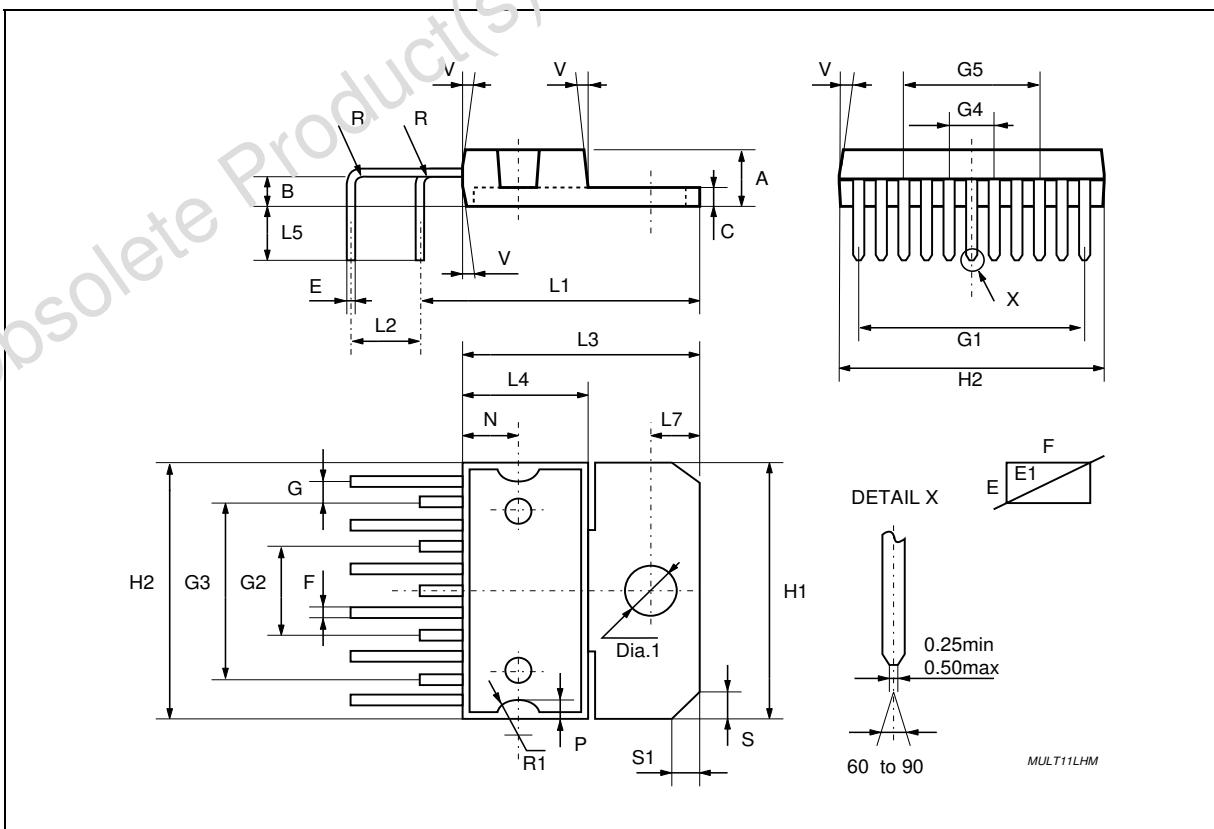

Obsolete Product(s) - Obsolete Product(s)

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.
All other names are the property of their respective owners

© 2003 STMicroelectronics - All rights reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States

www.st.com

