



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# NON-ISOLATED DC/DC CONVERTERS


3.3V Input / 0.9V – 2.5V Output / 7A



BP06xRAH-07C

## SRAH-07C / VRAH-07C Series      RoHS Compliant

- Nonisolated
- Compact, low profile surface mount package
- Fixed frequency
- High efficiency means less power dissipation
- Excellent thermal performance
- Optimized for cost
- Remote on/off
- Undervoltage lockout (UVLO)
- Over current and short circuit protection
- Industrial temperature range -40° to +85° C

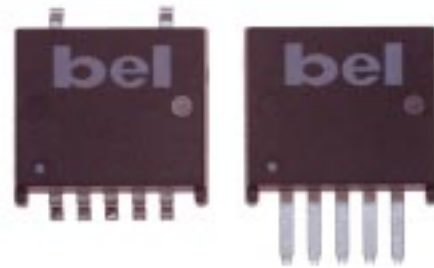

### Description

The Bel SRAH-07C and VRAH-07C modules are a series of non-isolated, step down DC/DC power converters that operate from a nominal 3.3V source. These converters are available in a range of output voltages from 0.9V to 2.5V. They are packaged in a compact, overmolded package rated at 7A. Optional lead forming provides a vertical mount product for minimal footprint or a surface mount option for a very low profile. Standard features include remote on/off, over current and short circuit protection, and output voltage adjust. These products may be used almost anywhere low voltage silicon is employed and a 3.3V source is available. Typical applications include file servers, routers, line cards and other computing and communications equipment.

### Applications

- Distributed power architectures
- Data networking equipment
- Telecommunications
- Computers and peripherals

### Options

- Wide range adjustable output

### Part Number Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Part Number Surface Mount	Part Number Vertical Mount
2.5V	3.3V	7A	17.5W	92%	SRAH-07C250	VRAH-07C250
1.8V	3.3V	7A	12.6W	88%	SRAH-07C180	VRAH-07C180
1.5V	3.3V	7A	10.5W	86%	SRAH-07C150	VRAH-07C150
1.2V	3.3V	7A	8.4W	83%	SRAH-07C120	VRAH-07C120
0.9V	3.3V	7A	6.3W	80%	SRAH-07C090	VRAH-07C090
0.9V - 2.5V	3.3V	7A	17.5W	92%	SRAH-07C1A0	VRAH-07C1A0

©2006 Bel Fuse Inc. Specifications subject to change without notice. 02.06

BP06xRAH-07C

### Absolute Maximum Ratings

Parameter	Symbol	Min	Typical	Max	Unit
Continuous Input Voltage	Vin	-0.3		6	V
Output Enable Terminal Voltage	Vouten	-0.3		6	V
Ambient Temperature	Tamb	-40		85	°C
Storage Temperature	Tstor	-40		125	°C

Note: Use beyond the maximum ratings may cause a reliability degradation of the DC/DC converter or may permanently damage the device.

### Input Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Operating Input Voltage	All	Vin	3		3.6	V
Input Current	2.5V 1.8V 1.5V 1.2V 0.9V	lin			6.6 5.3 4.6 3.8 3.0	A
No Load Input Current	All				110	mA
Remote Off Input Current				7	15	mA
Input Reflected Ripple Current <sup>1</sup>	All			50	80	mA <sub>rms</sub>
Input Reflected Ripple Current (P-P) <sup>1</sup>	All			150	250	mApk
I <sup>2</sup> t Inrush Current Transient	All			0.08	0.16	A <sup>2</sup> s
Turn On Voltage Threshold	All		2.5		2.8	V
Turn Off Voltage Threshold	All			2.4		V

Note: Input capacitance 270µF/16V, ESR = 0.03 Ω max at 100kHz @ 25° C.  
 1. With simulated source impedance of 500nH, 5Hz to 20MHz.

# NON-ISOLATED DC/DC CONVERTERS

## 3.3V Input / 0.9V – 2.5V Output / 7A



BP06xRAH-07C

### Output Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Output Voltage Set Point <sup>1</sup>	2.5V	Vout	2.450	2.500	2.550	V
	1.8V					
	1.5V					
	1.2V					
	0.9V					
Load Regulation	2.5V			3	10	mV
	1.8V			3	10	
	1.5V			3	10	
	1.2V			1	5	
	0.9V			1	5	
Line Regulation	2.5V			3	10	mV
	1.8V			3	10	
	1.5V			3	10	
	1.2V			1	5	
	0.9V			1	5	
Regulation Over Temperature (-40° to +85° C)	2.5V			20	40	mV
	1.8V			15	30	
	1.5V			15	30	
	1.2V			10	20	
	0.9V			8	15	
Total Output Voltage Regulation	2.5V			26	60	mV
	1.8V			21	50	
	1.5V			21	50	
	1.2V			12	30	
	0.9V			10	25	
Output Ripple and Noise <sup>2</sup>	2.5V			40	80	mVp-p
	1.8V			40	80	
	1.5V			40	80	
	1.2V			40	80	
	0.9V			40	70	
Output Ripple and Noise <sup>2</sup>	All			10	20	mVrms
Output Current Range	All	Iout	0		7	A
Output DC Current Limit	All	Ioutlim	8.4		16	A
Short Circuit Surge	All	Ioutsurge		0.08	0.12	A <sup>2</sup> s
Turn on Time	All	Ton		7	15	ms
Overshoot at Turn On	All			0	1	%
Output Capacitance	All	Cout	0		2200	μF

Note: All specifications are typical at nominal input, full load at 25° C unless otherwise stated.

1. Vin = 3.3V, Iout = full load, Ta = 25° C.

2. 0 - 20MHz, 1μF ceramic cap and 10μF aluminum cap on output.



BP06xRAH-07C

### Output Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
<b>Transient Response <sup>3</sup></b>						
$\Delta V$ 50% to 100% of Max Load	2.5V			120	180	mV
Settling Time		Ts		40	80	$\mu s$
$\Delta V$ 100% to 50% of Max Load				120	180	mV
Settling Time		Ts		40	80	$\mu s$
<b>Transient Response <sup>3</sup></b>						
$\Delta V$ 50% to 100% of Max Load	1.8V			120	180	mV
Settling Time		Ts		40	80	$\mu s$
$\Delta V$ 100% to 50% of Max Load				120	180	mV
Settling Time		Ts		40	80	$\mu s$
<b>Transient Response <sup>3</sup></b>						
$\Delta V$ 50% to 100% of Max Load	1.5V			100	150	mV
Settling Time		Ts		40	80	$\mu s$
$\Delta V$ 100% to 50% of Max Load				100	150	mV
Settling Time		Ts		40	80	$\mu s$
<b>Transient Response <sup>3</sup></b>						
$\Delta V$ 50% to 100% of Max Load	1.2V			50	100	mV
Settling Time		Ts		40	80	$\mu s$
$\Delta V$ 100% to 50% of Max Load				50	100	mV
Settling Time		Ts		40	80	$\mu s$
<b>Transient Response <sup>3</sup></b>						
$\Delta V$ 50% to 100% of Max Load	0.9V			50	100	mV
Settling Time		Ts		40	80	$\mu s$
$\Delta V$ 100% to 50% of Max Load				50	100	mV
Settling Time		Ts		40	80	$\mu s$

Note: All specifications are typical at nominal input, full load at 25° C unless otherwise stated.  
 3. di/dt = 0.5A/ $\mu s$ , Ta = 25° C without external load capacitance.

# NON-ISOLATED DC/DC CONVERTERS

## 3.3V Input / 0.9V – 2.5V Output / 7A



BP06xRAH-07C

### General Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Efficiency <sup>1</sup>	2.5V	$\eta$	90	92		%
	1.8V		86	88		
	1.5V		84	86		
	1.2V		81	83		
	0.9V		78	80		
Switching Frequency	All	Fsw	250	300	340	kHz
Output Voltage Trim Range <sup>2</sup>	1.8V		50		146	%
Weight	All			5		g

1. Vin=3.3V, full load and Ta=25° C.

2. See graphs on page 9.

### Control Specifications






Parameter	Module	Symbol	Min	Typical	Max	Units
Remote On/Off <sup>3</sup>	All	Vouten				V
Signal Low (Unit Off)	All		-0.3		1	V
Signal High (Unit On)	All		1.8		3.6	V

3. With remote on/off pin 1 open, the module is on.

Note: On/off pin designed to work with an open collector/drain switch.

BP06xRAH-07C

**Efficiency Data**

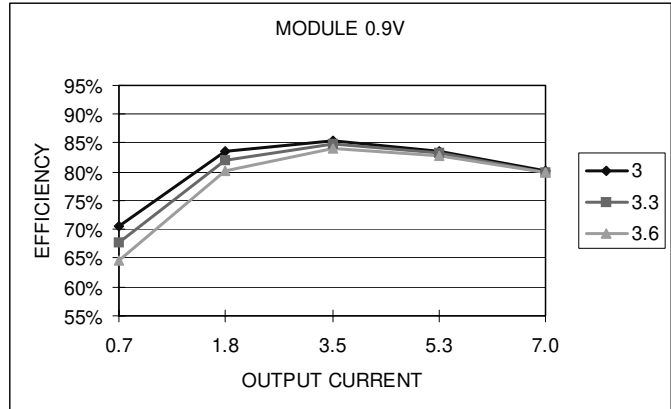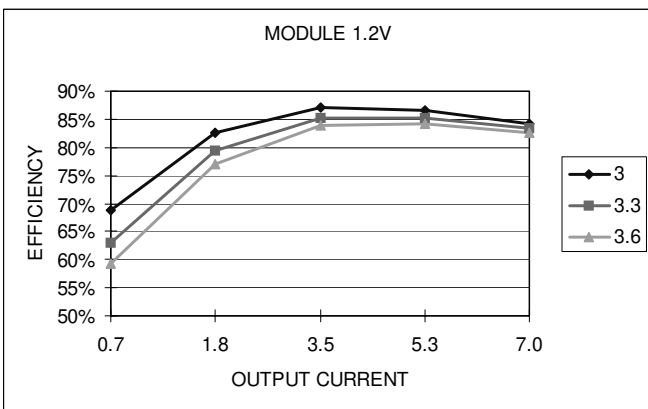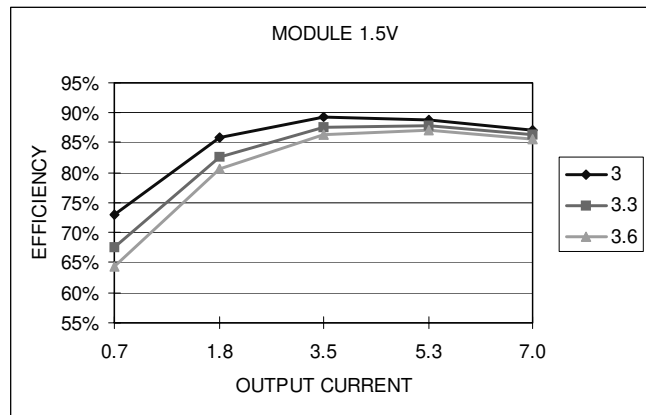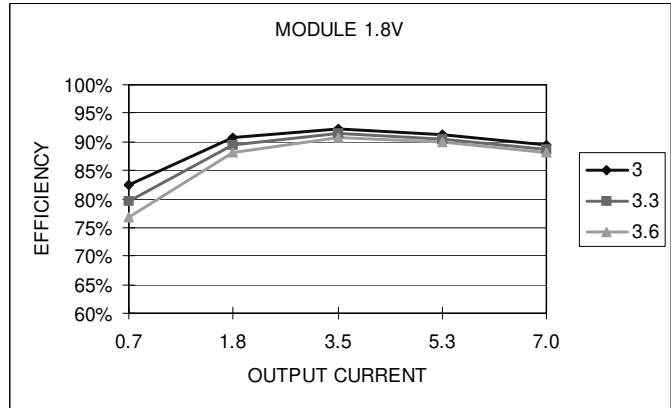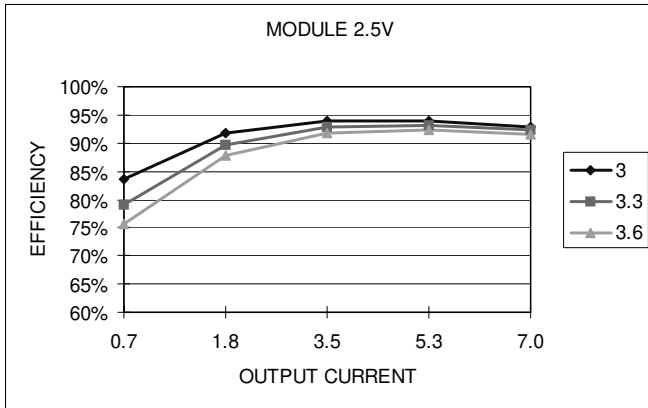

# NON-ISOLATED DC/DC CONVERTERS


## 3.3V Input / 0.9V – 2.5V Output / 7A



BP06xRAH-07C

### Ripple and Noise


1 $\mu$ F ceramic cap and 10 $\mu$ F aluminum cap added at the output.

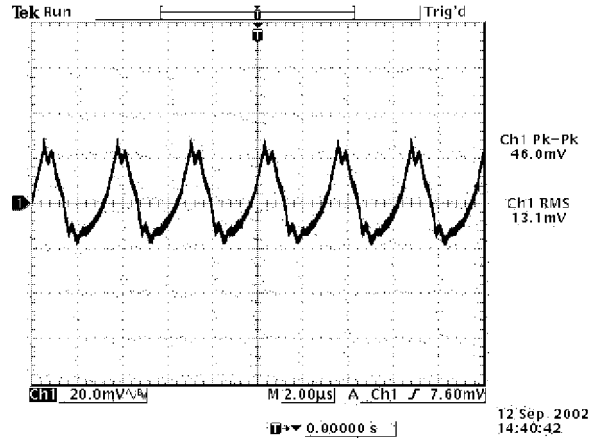


Ripple and noise at full load and 3.3Vdc input, 1.8Vdc output and Ta=25° C

### Transient Response

Transient response: di/dt = 0.5A/ $\mu$ S, no external load capacitance

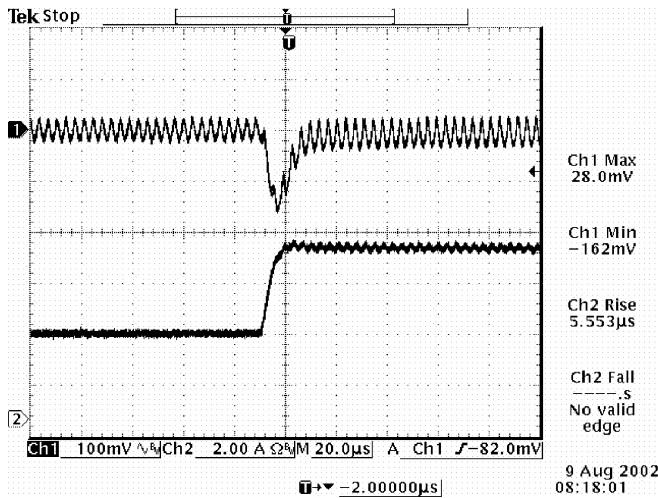

Vout=1.8V  
50% to 100% load transients at 3.3V input and Ta=25° C

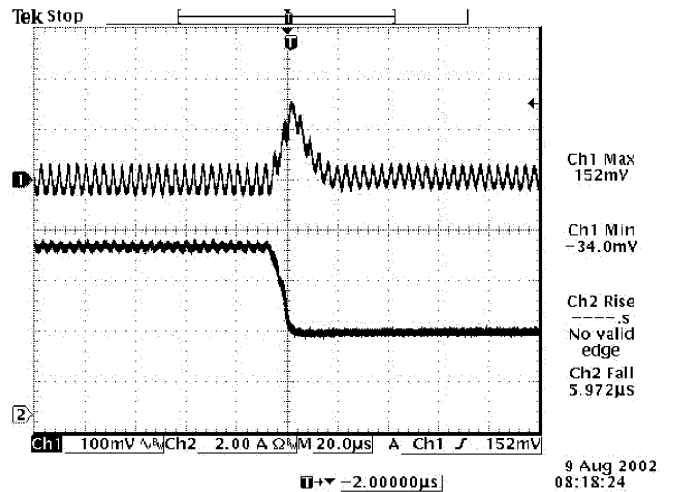


Vout=1.8V  
100% to 50% load transients at 3.3V input and Ta=25° C




BP06xRAH-07C

**Thermal Considerations**

**SRAH-07C**

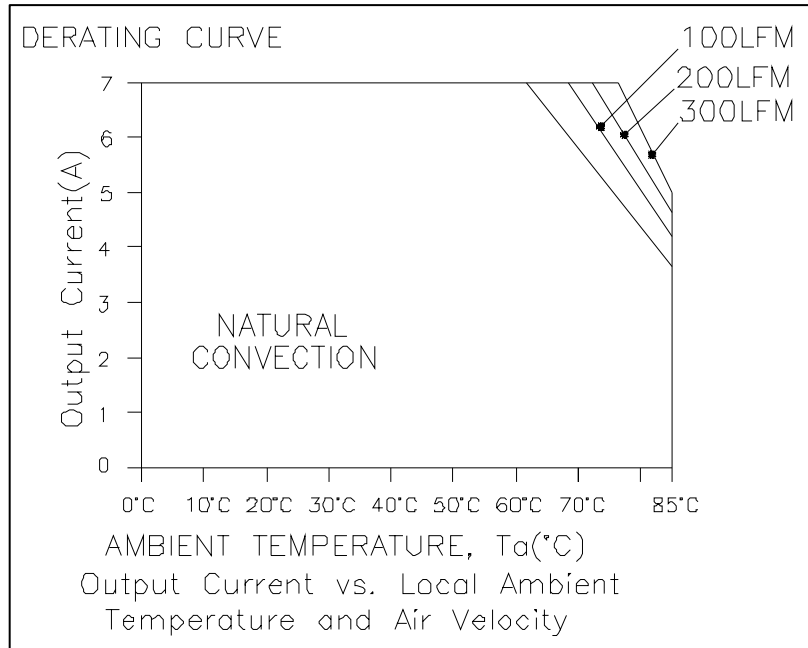

**VRAH-07C**

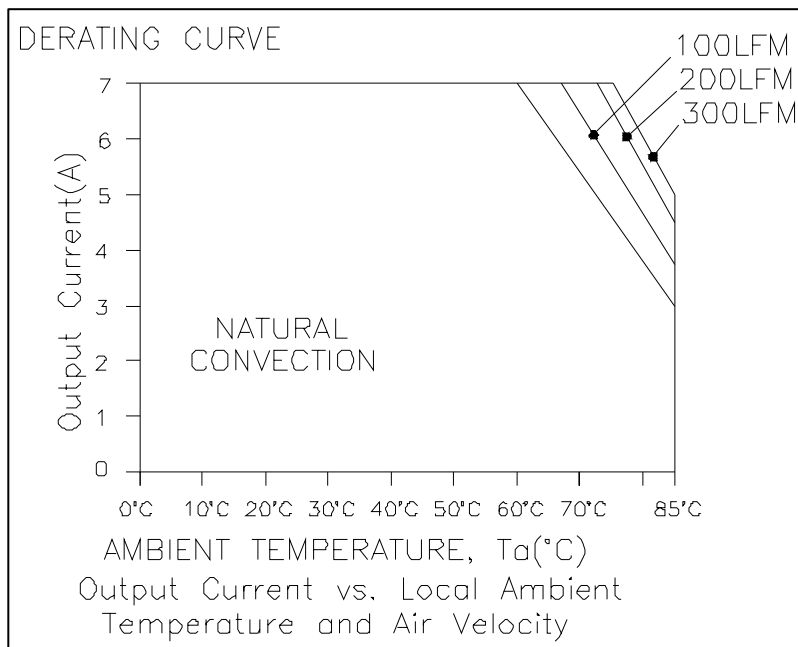

# NON-ISOLATED DC/DC CONVERTERS


3.3V Input / 0.9V – 2.5V Output / 7A




BP06xRAH-07C

## Output Voltage Set-Point Adjustment

Trim Down Test Circuit

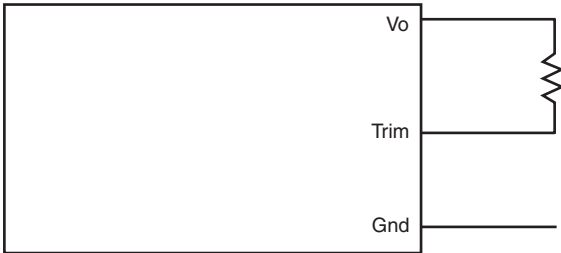


Trim Up Test Circuit

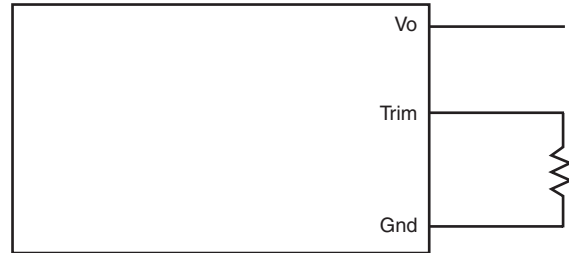


## Output Voltage Set-Point Adjustment

### xRAH-07C250 Trim Resistor Calculation

$$R_{\text{trim down}} = \left( \frac{6.4943}{V_o - V_{o, \text{adj}}} - 13.83 \right) \text{ Kohm}$$

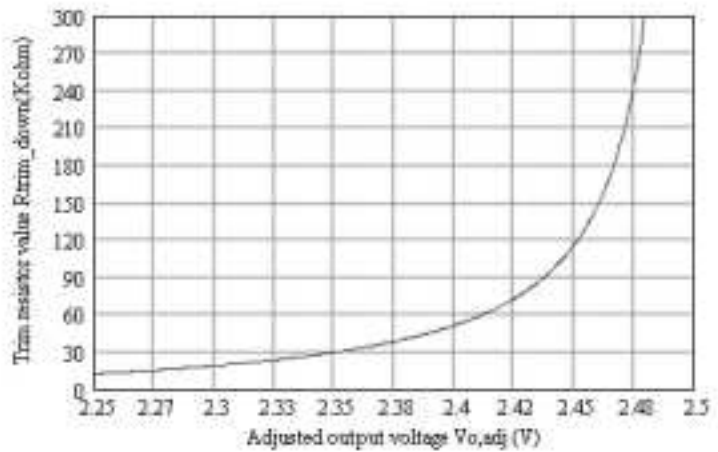

$$R_{\text{trim up}} = \left( \frac{3.064}{V_{o, \text{adj}} - V_o} - 10 \right) \text{ Kohm}$$

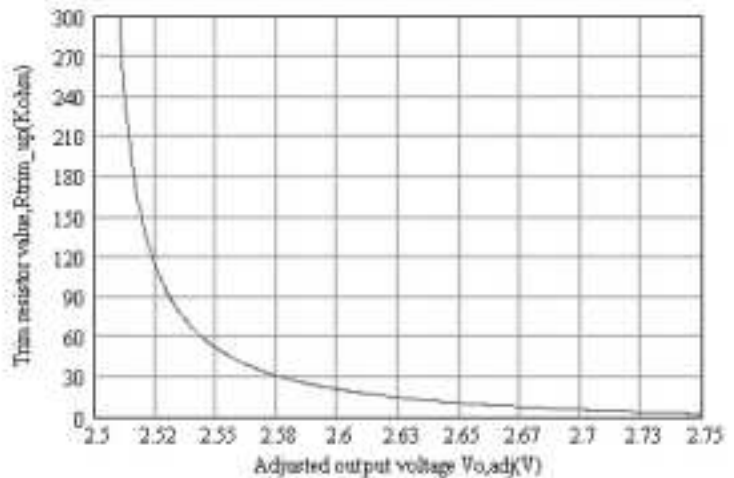



# NON-ISOLATED DC/DC CONVERTERS

## 3.3V Input / 0.9V – 2.5V Output / 7A




BP06xRAH-07C


### Output Voltage Set-Point Adjustment

#### xRAH-07C120 Trim Resistor Calculation

$$R_{\text{trim down}} = \left( \frac{0.622}{V_o - V_{o, \text{adj}}} - 4.15 \right) \text{ Kohm}$$

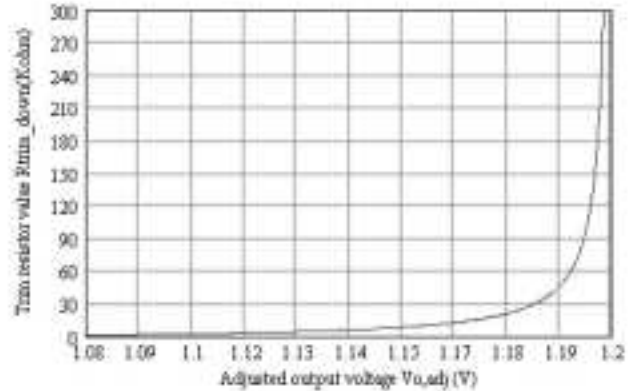


$$R_{\text{trim up}} = \left( \frac{1.232}{V_{o, \text{adj}} - V_o} - 2.61 \right) \text{ Kohm}$$

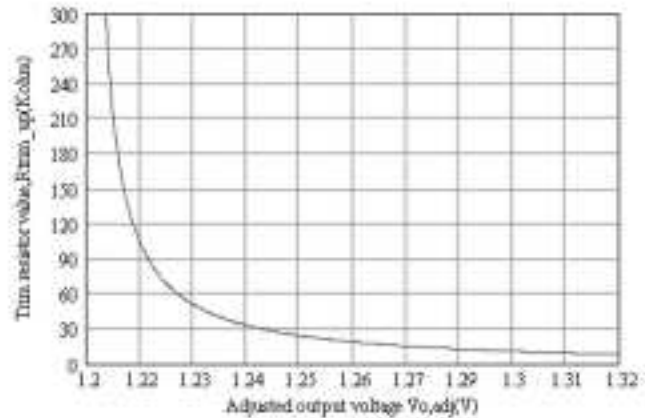

#### xRAH-07C090 Trim Resistor Calculation


$$R_{\text{trim up}} = \left( \frac{0.3064}{V_{o, \text{adj}} - V_o} - 0.178 \right) \text{ Kohm}$$

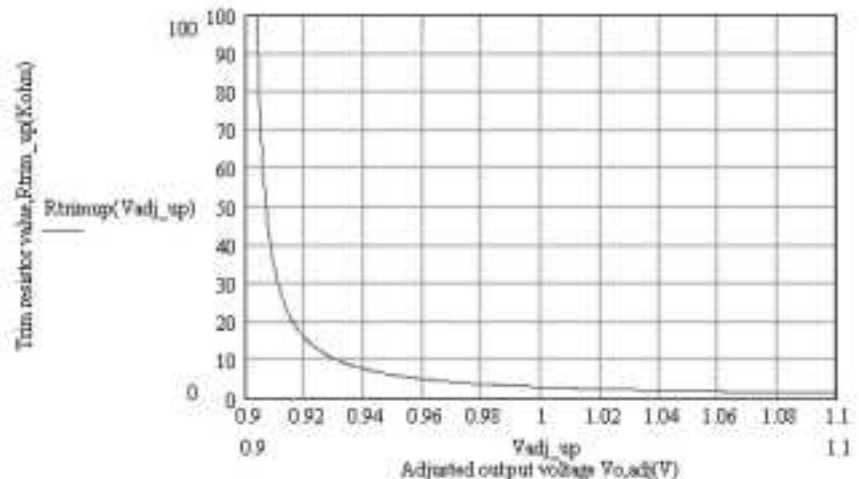


BP06xRAH-07C

**Output Voltage Set-Point Adjustment**

Trim Down Test Circuit

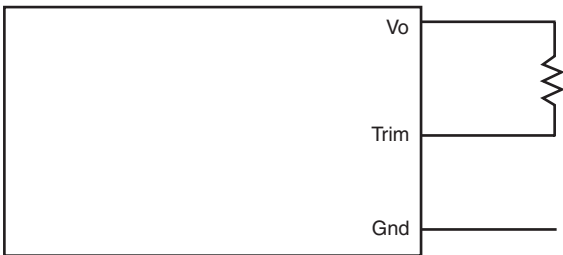


Trim Up Test Circuit

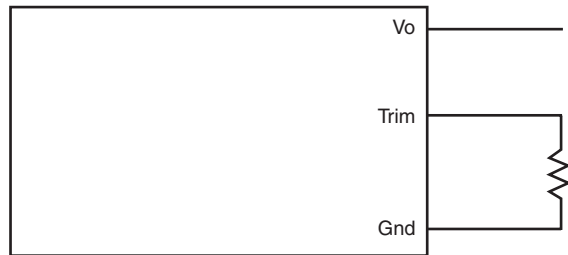


**Output Voltage Set-Point Adjustment**

xRAH-07C1A0 Trim Resistor Calculation

$$R_{\text{trim down}} = \left( \frac{3.8488}{V_o - V_{o, \text{adj}}} - 4.091 \right) \text{ Kohm}$$

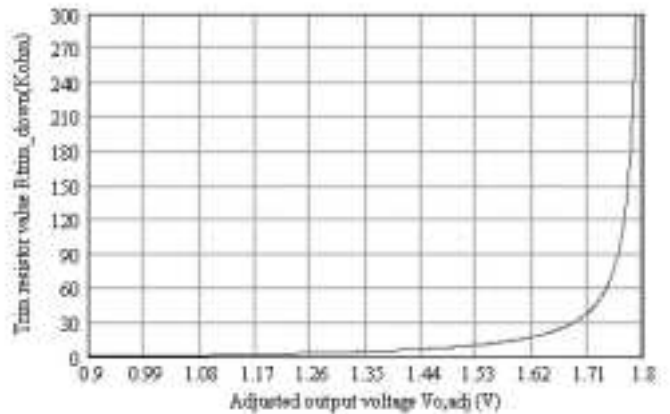

$$R_{\text{trim up}} = \left( \frac{3.064}{V_{o, \text{adj}} - V_o} - 0.261 \right) \text{ Kohm}$$

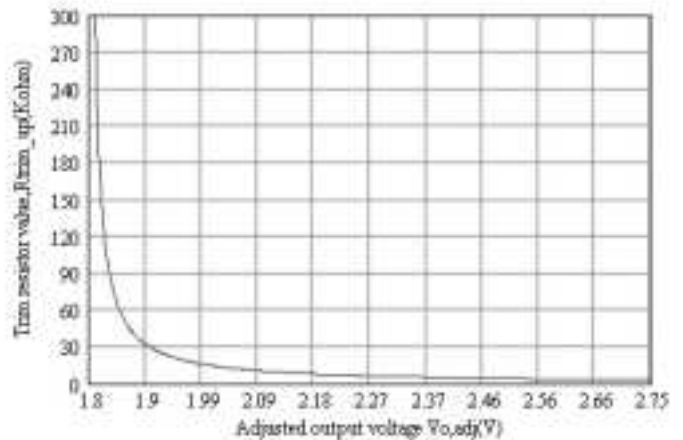

**Note: Default output voltage of SRAH-07C1A0 is 1.8V**

# NON-ISOLATED DC/DC CONVERTERS


3.3V Input / 0.9V – 2.5V Output / 7A



BP06xRAH-07C

## Mechanical

SRAH-07C

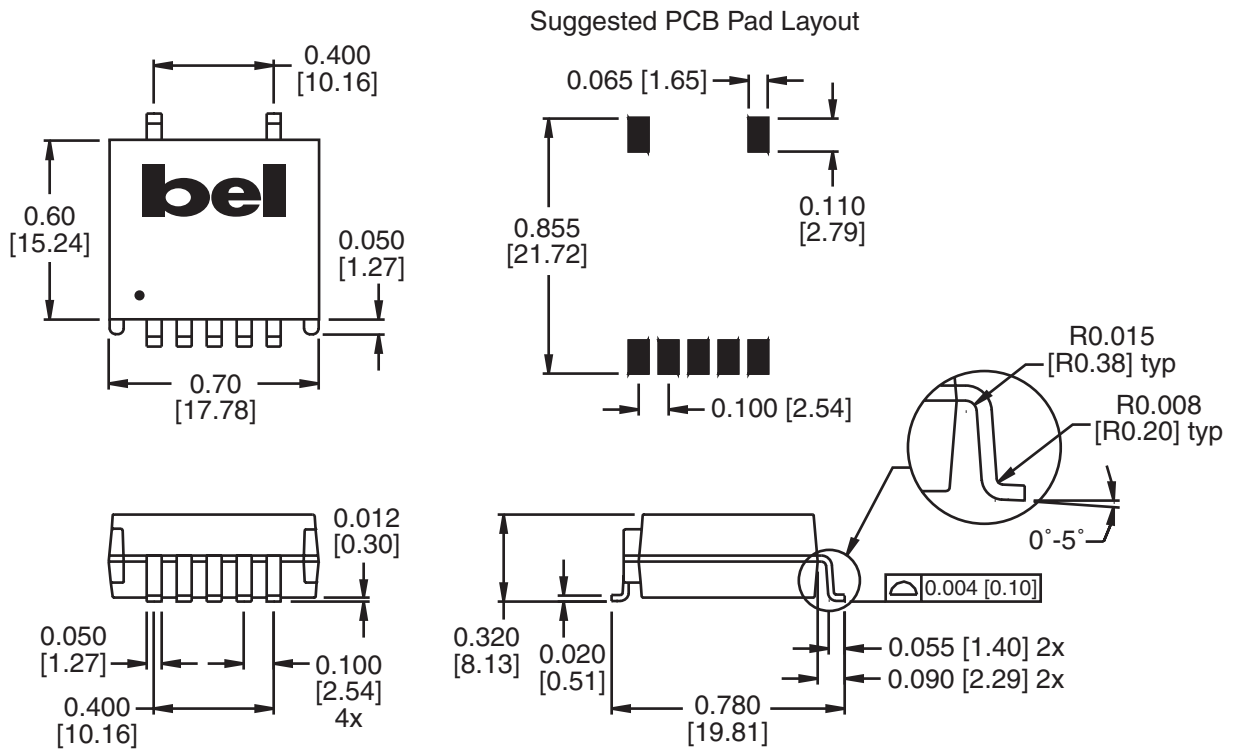

Dimensions are in inches [millimeters].  
Standard dimension tolerance is  $\pm 0.005$  [0.13] unless otherwise noted.

Pin	Function
1	Remote On/Off
2	+Vin
3	Ground
4	+Vo
5	Trim
6	No Connection
7	No Connection






BP06xRAH-07C


### Mechanical

VRAH-07C

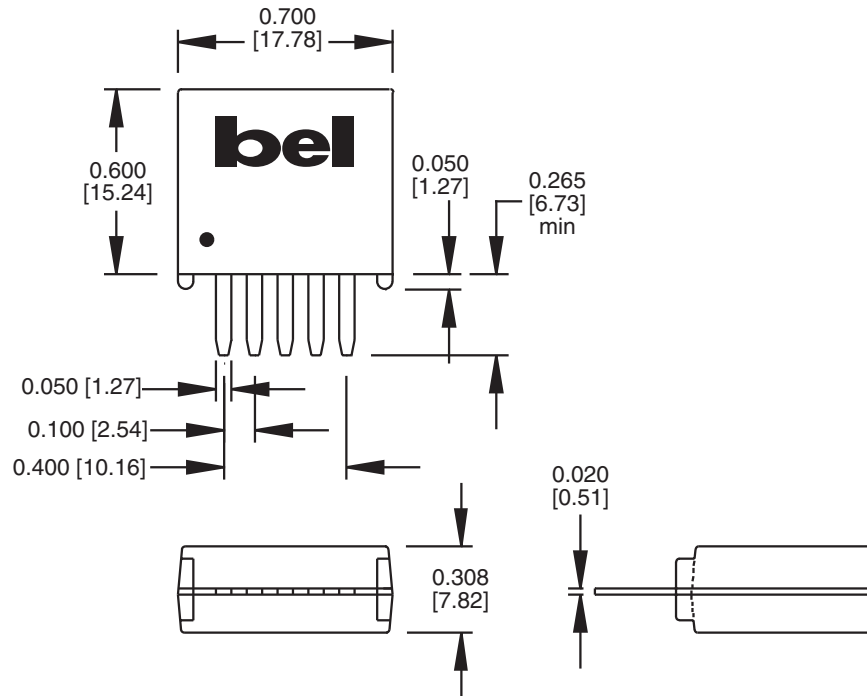

Dimensions are in inches [millimeters].  
Standard dimension tolerance is  $\pm 0.005$  [0.13] unless otherwise noted.

Pin	Function
1	Remote On/Off
2	+Vin
3	Ground
4	+Vo
5	Trim



#### RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products. These parts are not however compatible with the higher temperatures associated with lead free solder processes and must be soldered using a reflow profile with a peak temperature of no more than 240°C.



©2006 Bel Fuse Inc. Specifications subject to change without notice. 02.06

#### CORPORATE

**Bel Fuse Inc.**  
206 Van Vorst Street  
Jersey City, NJ 07302  
Tel 201-432-0463  
Fax 201-432-9542  
www.belfuse.com

#### FAR EAST

**Bel Fuse Ltd.**  
8F / 8 Luk Hop Street  
San Po Kong  
Kowloon, Hong Kong  
Tel 852-2328-5515  
Fax 852-2352-3706  
www.belfuse.com

#### EUROPE

**Bel Fuse Europe Ltd.**  
Preston Technology Management Centre  
Marsh Lane, Suite G7, Preston  
Lancashire, PR1 8UD, U.K.  
Tel 44-1772-556601  
Fax 44-1772-888366  
www.belfuse.com