



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# SP6669

600 mA 1.5 MHz PWM Synchronous Step Down Converter



### Evaluation Board Configuration

Input Voltage	2.5 V - 5.5 V
Output Voltage	1.8 V
Max. Output Current	600 mA
Operating Frequency	1.5 MHz
Inductor Reference	4.7 µH – WE-TPC 744 025 004

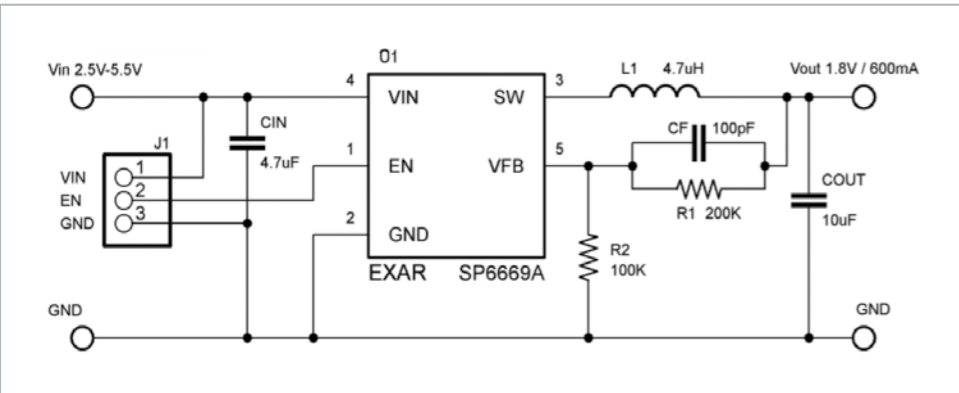

### Inductor Value L – Resistor Values R1 / R2 Selector

V <sub>OUT</sub> / I <sub>OUT</sub>	V <sub>IN</sub> = 3.3 V			V <sub>IN</sub> = 5.0 V			R1	R2
	100 mA	300 mA	600 mA	100 mA	300 mA	600 mA		
<b>3.3 V</b>				22 µH 744 025 220	6.8 µH 744 025 006	4.7 µH <b>744 025 004</b>	453 kΩ	100 kΩ
<b>2.8 V</b>	10 µH 744 032 910 0	3.3 µH 744 025 003	1.5 µH	22 µH 744 025 220	6.8 µH 744 025 006	4.7 µH <b>744 025 004</b>	365 kΩ	100 kΩ
<b>2.5 V</b>	15 µH 744 025 150	4.7 µH <b>744 032 900 4</b>	2.2 µH 744 032 900 2	22 µH 744 025 220	6.8 µH 744 025 006	4.7 µH <b>744 025 004</b>	316 kΩ	100 kΩ
<b>1.8 V</b>	15 µH 744 025 150	4.7 µH <b>744 032 900 4</b>	3.3 µH 744 025 003	22 µH 744 025 220	6.8 µH 744 025 006	4.7 µH <b>744 025 004</b>	<b>200 kΩ</b>	<b>100 kΩ</b>
<b>1.2 V</b>	15 µH 744 025 150	4.7 µH <b>744 032 900 4</b>	3.3 µH 744 025 003	18 µH 744 032 180	6.8 µH 744 025 006	3.3 µH 744 025 003	100 kΩ	100 kΩ
<b>0.8 V</b>	15 µH 744 025 150	4.7 µH <b>744 032 900 4</b>	2.2 µH 744 032 900 2	15 µH 744 032 001 5	4.7 µH <b>744 025 004</b>	2.2 µH 744 025 002	33 kΩ	100 kΩ

Best suitable inductor

Lowest profile inductor


Evaluation board configuration

## Design Tips

### Output Voltage Selection

The output voltage is adjustable via the external resistor network R1 and R2 as per the following formula:

$$V_{OUT} = V_{REF} \cdot \left(1 + \frac{R1}{R2}\right)$$

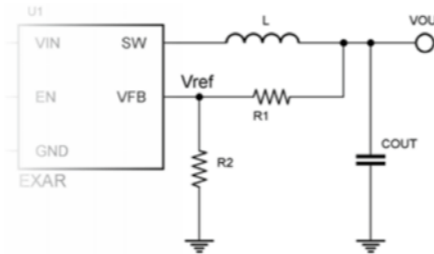

Where

V<sub>REF</sub> = Reference voltage at 0.6 V

The feedback resistors must be chosen such that power dissipation of the network is minimal. R1 and R2 are typically allowed within a given range; adhere to the recommended values in the tables.

### Inductor Selection

Inductor ripple current and saturation current ratings are two factors to be considered when selecting the inductor value.

A low R<sub>DC</sub> inductor is preferred. The inductor value L can be calculated from the following equation:

$$L = (V_{IN} - V_{OUT}) \cdot \left(\frac{V_{OUT}}{V_{IN}}\right) \cdot \left(\frac{1}{f}\right) \cdot \left(\frac{1}{\Delta I_L}\right)$$

Where

L = Inductor value

V<sub>IN</sub> = Input voltage

V<sub>OUT</sub> = Output voltage

f = Operating frequency

ΔI<sub>L</sub> = Current ripple – usually set between 30% and 40% of output current desired

The inductor value for the evaluation boards is set for an output current ripple of approximately 30% to 40% of the maximum output current desired. An output current ripple level of 30% to 40% is acceptable in most designs and may provide extra flexibility in selecting the appropriate inductor value.

### Note

All product documentations, including datasheets, evaluation board manuals and bill of material can be found on

[www.exar.com/wurth\\_electronics](http://www.exar.com/wurth_electronics)

[www.we-online.com/exar](http://www.we-online.com/exar)

up to 97 % efficiency

## DESIGN KIT Low Power – Point of Load Solutions



600 mA to 1.5 A,  
Low Input Voltage  
Single and Dual  
Channel Converter

Order Code IC-744 721  
Version 1.0

Exar Device	Max. Output Current	Input Voltage Range	Output Voltage Range	Operating Frequency	Max Efficiency	Package	Würth Elektronik Inductor	
							Value	Reference
SP6669	0.6 A	2.5 V - 5.5 V	0.6 V - V <sub>IN</sub>	1.5 MHz	95 %	SOT23-5	4.7 µH	744 025 004
XRP6658	1 A	2.5 V - 5.5 V	0.6 V - V <sub>IN</sub>	1.5 MHz	97 %	SOT23-5	2.2 µH	744 043 002 2
XRP6668	1A / 1A	2.5 V - 5.5 V	0.6 V - V <sub>IN</sub>	1.5 MHz	97 % / 97 %	SOIC8	2.2 µH / 2.2 µH	744 043 002 2
XRP6657	1.5 A	2.5 V - 5.5 V	0.6 V - V <sub>IN</sub>	1.5 MHz	95 %	DFN6	1.8 µH	744 773 018


# XRP6658

1 A 1.5 MHz Synchronous Step Down Converter

More information on [www.we-online.com/exar](http://www.we-online.com/exar)

## Evaluation Board Configuration

Input Voltage	2.5 V - 5.5 V
Output Voltage	3.3 V
Max. Output Current	1 A
Operating Frequency	1.5 MHz
Inductor Reference	2.2 µH – WE-TPC 744 043 002 2

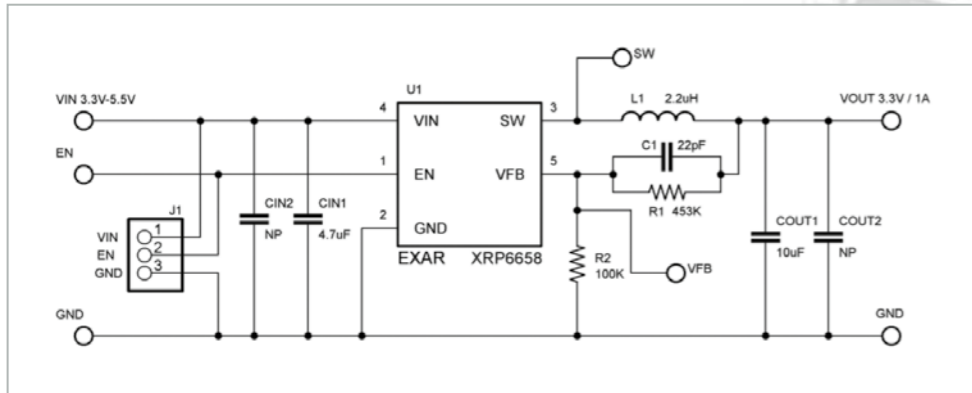

## Inductor Value L – Resistor Values R1 / R2 Selector

V <sub>out</sub> /I <sub>out</sub>	V <sub>in</sub> = 3.3 V			V <sub>in</sub> = 5.0 V			R1	R2
	100 mA	500 mA	1000 mA	100 mA	500 mA	1000 mA		
<b>3.3 V</b>				22 µH	4.7 µH	2.2 µH	453 kΩ	100 kΩ
<b>2.8 V</b>	10 µH	1.8 µH	1.0 µH	22 µH	4.7 µH	2.2 µH	365 kΩ	100 kΩ
<b>2.5 V</b>	15 µH	2.2 µH	1.2 µH	22 µH	4.7 µH	2.2 µH	316 kΩ	100 kΩ
<b>1.8 V</b>	15 µH	3.3 µH	1.5 µH	22 µH	6.8 µH	2.2 µH	200 kΩ	100 kΩ
<b>1.2 V</b>	15 µH	3.3 µH	1.5 µH	18 µH	3.3 µH	1.8 µH	100 kΩ	100 kΩ
<b>0.8 V</b>	15 µH	2.2 µH	1.2 µH	15 µH	3.3 µH	1.5 µH	33 kΩ	100 kΩ


Best suitable inductor    Lowest profile inductor    Evaluation board configuration

# XRP6668

1 A/1 A Dual Channel 1.5 MHz Synchronous Step Down Converter

## Evaluation Board Configuration

Input Voltage	2.5 V - 5.5 V
Output Voltage	3.3 V/1.8 V
Max. Output Current	1 A/1 A
Operating Frequency	1.5 MHz
Inductor Reference	2.2 µH – WE-TPC 744 043 002 2

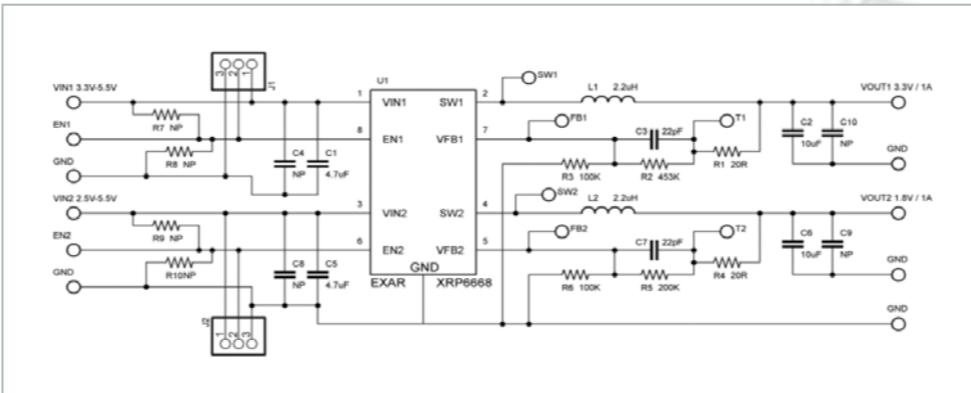

## Inductor Value L – Resistor Values R1 / R2 Selector

V <sub>out</sub> /I <sub>out</sub>	V <sub>in</sub> = 3.3 V			V <sub>in</sub> = 5.0 V			R1	R2
	100 mA	500 mA	1000 mA	100 mA	500 mA	1000 mA		
<b>3.3 V</b>				22 µH	4.7 µH	2.2 µH	453 kΩ	100 kΩ
<b>2.8 V</b>	10 µH	1.8 µH	1.0 µH	22 µH	4.7 µH	2.2 µH	365 kΩ	100 kΩ
<b>2.5 V</b>	15 µH	2.2 µH	1.2 µH	22 µH	4.7 µH	2.2 µH	316 kΩ	100 kΩ
<b>1.8 V</b>	15 µH	3.3 µH	1.5 µH	22 µH	6.8 µH	2.2 µH	200 kΩ	100 kΩ
<b>1.2 V</b>	15 µH	3.3 µH	1.5 µH	18 µH	3.3 µH	1.8 µH	100 kΩ	100 kΩ
<b>0.8 V</b>	15 µH	2.2 µH	1.2 µH	15 µH	3.3 µH	1.5 µH	33 kΩ	100 kΩ

Best suitable inductor    Lowest profile inductor    Evaluation board configuration

Note: The above table values apply to each channel of the XRP6668.


# XRP6657

1.5 A 1.3 MHz Synchronous Step Down Converter



## Evaluation Board Configuration

Input Voltage	2.5 V - 5.5 V
Output Voltage	1.8 V
Max. Output Current	1.5 A
Operating Frequency	1.3 MHz
Inductor Reference	1.8 µH – WE-PD2 744 773 018

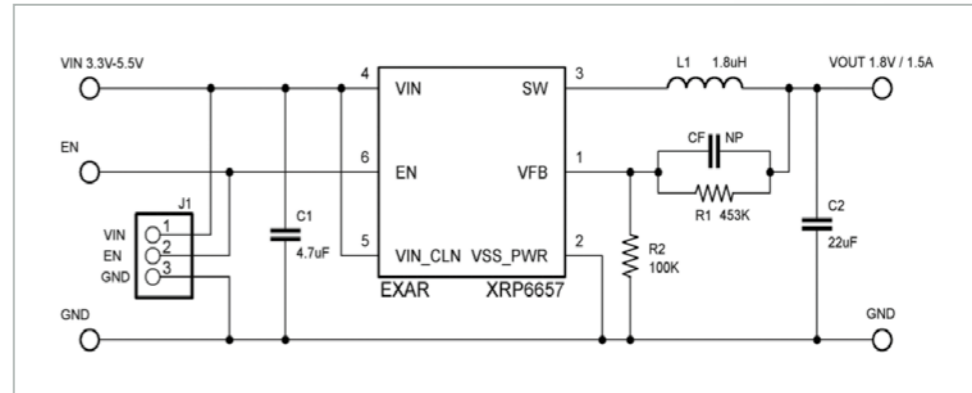

## Inductor Value L – Resistor Values R1 / R2 Selector

V <sub>out</sub> /I <sub>out</sub>	V <sub>in</sub> = 3.3 V			V <sub>in</sub> = 5.0 V			R1	R2
	100 mA	750 mA	1500 mA	100 mA	750 mA	1500 mA		
<b>3.3 V</b>				33 µH	3.3 µH	1.8 µH	453 kΩ	100 kΩ
<b>2.8 V</b>	10 µH	1.5 µH	1.0 µH	33 µH	3.3 µH	1.8 µH	365 kΩ	100 kΩ
<b>2.5 V</b>	15 µH	1.8 µH	1.0 µH	33 µH	3.3 µH	1.8 µH	316 kΩ	100 kΩ
<b>1.8 V</b>	18 µH	2.2 µH	1.5 µH	33 µH	3.3 µH	1.8 µH	200 kΩ	100 kΩ
<b>1.2 V</b>	18 µH	2.2 µH	1.0 µH	22 µH	3.3 µH	1.5 µH	100 kΩ	100 kΩ
<b>0.8 V</b>	15 µH	1.8 µH	1.0 µH	15 µH	2.2 µH	1.0 µH	33 kΩ	100 kΩ

Best suitable inductor    Lowest profile inductor    Evaluation board configuration