



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com





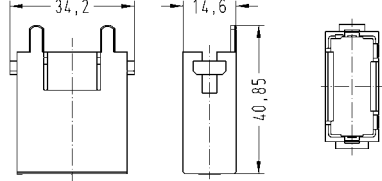
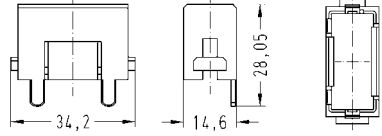
Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Number of contacts

20

32 V
4 A
+ shielding

Identification	Wire cross section (mm ²)	Part number		Drawing Dimensions in mm												
		male	female													
<p>Han-Modular®, Han® Shielded Module insert, Crimp terminal, contact resistance ≤4 mOhm</p>  <p>Please order crimp contacts separately. Please order the adapter module separately.</p>		09 14 020 3013	09 14 020 3113													
<p>Han-Modular®, Adapter module</p>  <p>Han® D-Sub crimp contact, turned contacts</p> 	<p>0.09–0.25 0.13–0.33 0.25–0.52</p>	<p>09 14 001 3011 09 67 000 7576 09 67 000 5576 09 67 000 8576</p>	<p>09 14 001 3111 09 67 000 7476 09 67 000 5476 09 67 000 8476</p>	<p>M</p>  <p>F</p>  <table border="1" data-bbox="1037 1444 1492 1579"> <thead> <tr> <th>Wire gauge</th> <th>max. insulation diameter</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.09-0.25 mm²</td> <td>1.7</td> <td>4 mm</td> </tr> <tr> <td>0.13-0.33 mm²</td> <td>1.7</td> <td>4 mm</td> </tr> <tr> <td>0.25-0.52 mm²</td> <td>1.7</td> <td>4 mm</td> </tr> </tbody> </table>	Wire gauge	max. insulation diameter	Stripping length	0.09-0.25 mm ²	1.7	4 mm	0.13-0.33 mm ²	1.7	4 mm	0.25-0.52 mm ²	1.7	4 mm
Wire gauge	max. insulation diameter	Stripping length														
0.09-0.25 mm ²	1.7	4 mm														
0.13-0.33 mm ²	1.7	4 mm														
0.25-0.52 mm ²	1.7	4 mm														

Han-Modular