



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





ZEPIR0AxS02MODG

ZMOTION™ Detection Module

Product Specification

PS028408-0312





Warning: DO NOT USE IN LIFE SUPPORT SYSTEMS.

LIFE SUPPORT POLICY

ZILOG'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF ZILOG CORPORATION.

As used herein

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

Document Disclaimer

©2012 Zilog, Inc All rights reserved. Information in this publication concerning the devices, applications, or technology described is intended to suggest possible uses and may be superseded. ZILOG, INC. DOES NOT ASSUME LIABILITY FOR OR PROVIDE A REPRESENTATION OF ACCURACY OF THE INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED IN THIS DOCUMENT. ZILOG ALSO DOES NOT ASSUME LIABILITY FOR INTELLECTUAL PROPERTY INFRINGEMENT RELATED IN ANY MANNER TO USE OF INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED HEREIN OR OTHERWISE. The information contained within this document has been verified according to the general principles of electrical and mechanical engineering.

ZMOTION and Z8 Encore! XP are trademarks or registered trademarks of Zilog, Inc. (an IXYS Company). All other product or service names are the property of their respective owners.

Revision History

Each instance in the revision history table reflects a change to this document from its previous revision. For more details, refer to the corresponding pages or appropriate links given in the table below.

Date	Revision Level	Description	Page
Mar 2012	08	Added Rev B part to Ordering Information table.	56
Apr 2011	07	Update to Module photo; correction to Light Gate description.	2, 5
Nov 2010	06	Updated to new Zilog/IXYS logo.	All
Oct 2010	05	Replaced all instances of ePIR with advanced passive infrared.	All
Sep 2010	04	Fixed formatting and pagination issues.	All
Sep 2010	03	Replaced Zilog logos, ePIR with ZMOTION, and Zdots with Module. Updated Figure 11 .	All
Oct 2008	02	Updated Related Products section (changed 88-pin SOIC to 28-pin SOIC for Z8FS040AHJ20SG). Removed references to GP and General Purpose.	52
Oct 2008	01	Original issue.	All

Table of Contents

Revision History	iii
List of Figures	vi
List of Tables	vii
Architectural Overview	1
Features	1
ZEPiR0AAS02MODG Block Diagram	2
Pin Description	3
Operational Modes	4
Setting Operation Mode	4
Signal Descriptions, Hardware Interface Mode	5
Ground	5
Supply Voltage	5
Delay	5
Sensitivity	6
Motion Detect	6
Light Gate	6
SLEEP Mode	6
Signal Descriptions, Serial Interface Mode	7
Ground	7
Supply Voltage	7
Receive Data	7
Transmit Data	7
Motion Detect and Reset	7
Light Gate	8
SLEEP Mode	8
Voltage Brown-Out Protection and Power-On Reset	8
Operation	10
Hardware Interface Mode	10
SLEEP Mode in Hardware Interface Mode	10
Serial Interface Mode	11
SLEEP Mode in Serial Interface Mode	11
Serial Interface Commands and Description	12
Serial Commands	16
Motion Status Command	16
Light Gate Level Commands	17



- MD/RST Pin Configuration 19
- MD Activation Time 21
- Hyper Sense 22
- Hyper Sense Level Setting 24
- Frequency Response Setting 26
- Motion Detection Suspend 28
- Software Revision 30
- Serial Interface Command Mode 31
- Motion Detected Unsolicited Mode 33
- MD Current Active Output Time 35
- Ping 37
- Range Setting 39
- Sensitivity 41
- Directional Detection 43
- Module Reset 46
- Sleep Mode 48
- Detection Pattern 49
- Mechanical Information 50
- ZMOTION Detection Module Schematic 52
- Related Documents 53
- Related Products 53
- Electrical Characteristics 54
 - Absolute Maximum Ratings 55
- Ordering Information 56
 - Part Numbers 56
- Appendix A. Hardware Interface Mode 57
- Appendix B. Serial Interface Mode 58
- Appendix C. Software Revisions 59
- Customer Support 60

List of Figures

Figure 1. ZMOTION Block Diagram (ZEPIR0AAS02MODG)	2
Figure 2. The ZMOTION Detection Module (Shown: ZEPIR0AAS02MODG)	3
Figure 3. Power-On Reset Operation	9
Figure 4. Voltage Brown-Out Reset Operation	9
Figure 5. Read Command Structure	12
Figure 6. Write Command Structure	13
Figure 7. Confirmed Command Structure	13
Figure 8. Detection Pattern	49
Figure 9. Mechanical Drawing of the ZMOTION Detection Module (ZEPIR0AAS02MODG)	50
Figure 10. Mechanical Drawing of the ZMOTION Detection Module (ZEPIR0ABS02MODG)	51
Figure 11. Schematic of ZMOTION Detection Module	52
Figure 12. Application Example, Hardware Interface Mode	57
Figure 13. Application Example, Serial Interface Mode	58

List of Tables

Table 1.	Pin Description	3
Table 2.	Delay Time and Voltage on DLY	5
Table 3.	Summary of Serial Interface Commands	15
Table 4.	Shortcuts to Light Gate Level Commands	17
Table 5.	MD Output Activation Time Values.	21
Table 6.	MD Output Activation Time Values.	31
Table 7.	MD Output Activation Time Values.	35
Table 8.	Shortcuts to Directional Detection Commands.	43
Table 9.	Shortcuts to Module Reset Commands.	46
Table 10.	Electrical Characteristics	54
Table 11.	Absolute Maximum Ratings	55
Table 12.	Part Numbers	56
Table 13.	ZMOTION Detection Module Software Revision (Application Software) . .	59
Table 14.	ZMOTION Software Engine Revision	59

Architectural Overview

Zilog's ZMOTION Detection Module is a complete motion detection solution ideally suited for applications that need to detect a human presence. It is an excellent solution for detecting people as they approach entrances, kiosks, product displays, vending machines, appliances and advertising displays.

The ZMOTION Detection Module is a board-level module that combines the unique features of Zilog's Z8FS040 Motion Detection microcontroller with a pyroelectric sensor and a low-profile lens. The surface-mount pyroelectric sensor and lens combine to provide the lowest possible profile without sacrificing performance. The module is only 25.5 mm x 16.7 mm (and less than 10mm thick) so it can easily fit into many size constrained applications.

The ZMOTION Detection Module is simple to use. It can operate in **HARDWARE Mode** – which simply activates an output signal when motion is detected – or in **SERIAL Mode**, allowing it to *talk* to another processor in your system when greater control over motion detection performance is required. In both modes, sensitivity and output activation time can be controlled to match application requirements. For applications that require ambient light sensing, an input supporting an external light sensor is provided for gating motion detection output.

The ZMOTION Detection Module provides an easy, low-risk solution for your motion detection requirements.

Features

Key features of the ZMOTION Detection Module include:

- Complete low-profile motion detection solution
- Small form factor: 25.5 mm x 16.7 mm
- Up to 5 m x 5 m, 60-degree detection pattern
- Simple-to-use **HARDWARE Mode** or advanced **SERIAL Mode (UART)**
- Flexible control over sensitivity and output activation time
- **SLEEP Mode** for low power applications
- Support for Ambient Light Sensor input
- Unique Hyper Sense feature automatically increases sensitivity after motion is detected
- Minimal components ensure high reliability
- Application code can be modified to support custom solutions
- Complete evaluation system available
- 8-pin interface connector with two orientations available (right-angle and straight)
- Operates from a 2.7 V to 3.6 V power supply
- Standard operating temperature range: 0°C to 70°C

ZEPIR0AxS02MODG Block Diagram

Figure 1 displays a block diagram of the ZMOTION Detection Module.

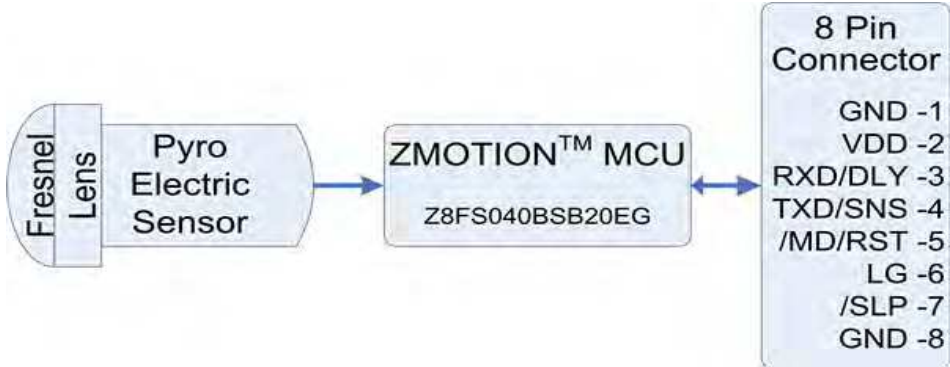


Figure 1. ZMOTION Block Diagram (ZEPIR0AxS02MODG)

Figure 2 displays the ZMOTION Detection Module.



Figure 2. The ZMOTION Detection Module (Shown: ZEPIR0AAS02MODG)

Pin Description

Table 1 lists the pin and signal descriptions for the ZMOTION Detection Module.

Table 1. Pin Description

Pin#	Signal Name	Hardware Interface Mode	Serial Interface Mode	Comments
1	GND	Ground	Ground	—
2	V _{DD}	Supply Voltage	Supply Voltage	—
3	RXD/DLY	Delay (DLY; analog input)	RXD — Receive Data (digital input)	—
4	TXD/SNS	Sensitivity (SNS; analog input)	TXD — Transmit Data (digital output)	Mode Select during reset
5	$\overline{\text{MD}}/\overline{\text{RST}}$	Motion Detect (digital output)	Configurable: Reset ($\overline{\text{RST}}$; digital input); Motion Detect (MD; digital input)	Default is Reset ($\overline{\text{RST}}$) in Serial Interface Mode.
6	LG	Light Gate (analog input)	Light Gate (analog input)	If unused, connect to V _{DD} .
7	$\overline{\text{SLP}}/\overline{\text{DBG}}$	Sleep ($\overline{\text{SLP}}$; digital input)	Sleep ($\overline{\text{SLP}}$; digital input)	DBG is used for programming and debug.
8	GND	Ground	Ground	—

Operational Modes

The ZMOTION Detection Module operates in both Hardware Interface and Software Interface modes; each is described in this section.

Hardware Interface Mode:

- Provides basic configuration via the hardware interface pins
- Allows you to adjust sensitivity and delay
- Offers optional ambient light input
- Includes a SLEEP Mode to reduce power consumption

Serial Interface Mode:

- Provides advanced configuration and status via a serial interface
- $\overline{\text{MD}}$, LG and $\overline{\text{SLP}}$ remain functional
- The serial interface runs at: 9600 bps, no parity, 8 data bits, 1 stop bit and no flow control

Setting Operation Mode

This section briefly outlines how to set Module operation in either Serial Interface or Hardware Interface modes.

Serial Interface Mode Selection

To select Serial Interface Mode, provide a pull up resistor from TXD/SNS to V_{DD} during power ON or when exiting SLEEP Mode (typically 100K Ω). The device detects that the voltage on the pin is greater than 2.5V and enables the TXD and RXD signals. \overline{MD} , LG and SLP remain active also. This resistor will have no effect on the transmitted data.

Hardware Interface Mode Selection

The Hardware Interface Mode is selected when TXD/SNS is between 0V and 1.8V during power ON or when exiting SLEEP Mode.

For examples of using the ZMOTION Detection Module in Hardware and Serial Interface Modes, see [Appendix A. Hardware Interface Mode](#) on page 57 and [Appendix B. Serial Interface Mode](#) on page 58.

Signal Descriptions, Hardware Interface Mode

This section describes the signals for operating in Hardware Interface mode.

Ground

Both Pin 1 and the Pin 8 ground (GND) signals are tied together on the ZMOTION Detection Module SBC and are connected to power ground.

Supply Voltage

The supply voltage (V_{DD}) provides power to the ZMOTION Detection Module via Pin 2. For power consumption details, see the [Electrical Characteristics](#) chapter on page 54.

Delay

A high-impedance analog input, Pin 3 (RXD/DLY), sets the duration for the Motion Detect (\overline{MD}) pin to remain active when motion has been detected. Provide a voltage between 0V and 2V to select a delay of 2 seconds to 15 minutes (see Table 2). Typically, a simple resistor divider or trim pot is used to set the voltage.

Table 2. Delay Time and Voltage on DLY

Delay Time	Voltage on DLY
2 sec	0V
5 sec	0.2V
10 sec	0.4V
30 sec	0.6V
1 min	0.8V
2 min	1.0V
3 min	1.2V
5 min	1.4V
10 min	1.6V
15 min	1.8V

Sensitivity

A high-impedance analog input, Pin 4 (TXD/SNS) sets the Module's sensitivity to motion. Provide a voltage between 0V and 1.8V to adjust the sensitivity to meet the application requirements. A lower voltage means higher sensitivity. Typically, a simple resistor divider or trim pot is used to set the voltage.

- 1.8V = lowest sensitivity
- 0V = highest sensitivity

This signal also determines the interface mode of the Module. At power ON, and when exiting SLEEP Mode, the signal is sampled; if it is greater than 2.5V (for example, pulled to V_{DD} via resistor), then the system enters Serial Interface Mode and the pin is converted to TXD. If the signal is between 0V and 1.8V, Hardware Interface Mode is selected.

Motion Detect

An active Low output, Pin 5 (\overline{MD}) is activated when motion is detected. The duration in which this signal remains active is set by the DLY signal. This signal is actively driven High.

- 0 = motion detected
- 1 = no motion detected

Light Gate

A high-impedance analog input, Pin 6 (LG), should be provided with a voltage that is proportional to the amount of ambient light in the environment (typically provided via a CDS

photocell or similar circuit). The signal is used internally to gate the \overline{MD} output signal such that it does not activate in the presence of daytime ambient light. When the voltage on this pin is lower than 1.0V, the \overline{MD} signal will not activate even when motion is detected. If \overline{MD} is in an active state when LG transitions below 1.0V, the current DLY duration is completed before \overline{MD} is deactivated. If LG is unused, connect to V_{DD} .

- GND to 1.0V = \overline{MD} does not activate when motion is detected
- 1.0V to V_{DD} = \overline{MD} is activated when motion is detected

SLEEP Mode

Pin 7 (\overline{SLP}) is an active Low digital input. When at logic '0', the Module enters low-power SLEEP Mode. The Module does not detect any motion and \overline{MD} is driven inactive. When \overline{SLP} is at logic '1', the Module exits SLEEP Mode and begins detecting motion. This signal must be held at logic '1' during power ON.

- 0 = module disabled; low-power SLEEP Mode is active
- 1 = normal operation

Signal Descriptions, Serial Interface Mode

This section describes the signals for operating in Serial Interface mode.

Ground

Both Pin 1 and Pin 8 ground (GND) signals are tied together on the ZMOTION Detection Module Single Board Computer and are connected to power ground.

Supply Voltage

The supply voltage (V_{DD}) provides power to the Module via Pin 2. For power consumption details, see the [Electrical Characteristics](#) chapter on page 54.

Receive Data

This Pin 3 (RXD/DLY) input is the asynchronous serial input used for sending commands and configuration to the Module. It operates at 9600 bps, no parity, 8 data bits, 1 stop bit and no flow control. For a list and description of the commands supported, see [Table 3](#) on page 14.

Transmit Data

This Pin 4 (TXD/SNS) output is the asynchronous serial data output from the Module in response to commands and configuration supplied on the RXD line. It operates at 9600

bps, no parity, 8 data bits and 1 stop bit. For more information about the serial command interface, see the [Serial Interface Commands and Description](#) section on page 11.

This signal also determines the interface mode of the Module. At power ON, and when exiting SLEEP Mode, the signal is sampled; if it is higher than 2.5 V (for example, pulled to V_{DD} via resistor), then the system enters Serial Interface Mode. If the signal is at a value between 0 V and 1.8 V, Hardware Interface Mode is selected.

Motion Detect and Reset

An active Low output, Pin 5 ($\overline{MD/RST}$), is activated when motion is detected. The duration in which this signal remains active is set by the DLY signal. This signal is actively driven High.

- 0 = motion detected
- 1 = no motion detected

As \overline{RST} , this pin provides an active Low hardware reset signal for the Module. The function of this pin is selected by the C serial command. The default value for this pin is \overline{RST} .

Light Gate

A high-impedance analog input, Pin 6 (LG), is used internally to gate the \overline{MD} signal such that it does not activate in the presence of daytime ambient light. The voltage applied to this pin should be proportional to the amount of ambient light in the environment (typically provided via a CDS photocell or similar circuit).

- $LG > \text{Light Gate Threshold Register}$ — \overline{MD} is activated when motion is detected
- $LG < \text{Light Gate Threshold Register}$ — \overline{MD} does not activate when motion is detected

If \overline{MD} is in an active state when LG transitions above the programmed value, the current DLY time is completed before \overline{MD} is deactivated.

If LG is unused, connect to V_{DD} .

SLEEP Mode

Pin 7 (\overline{SLP}) is an active Low digital input. When at logic 0, the Module enters low-power SLEEP Mode. The Module does not detect any motion and \overline{MD} is driven inactive. When SLP is at logic 1, the Module exits SLEEP Mode and begins detecting motion. This signal must be held at logic 1 during power ON.

- 0 = module disabled; low-power SLEEP Mode is active
- 1 = normal operation

Voltage Brown-Out Protection and Power-On Reset

The ZMOTION Detection Module contains an internal Reset Controller with a Power-On Reset (POR) circuit and Voltage Brown-Out (VBO) protection to ensure proper operation. When power is first applied, the POR circuit monitors the supply voltage and holds the Module's MCU in the Reset state until the supply voltage reaches a safe operating level. After the supply voltage exceeds the POR voltage threshold (V_{POR}), the MCU is released and the Module begins operating. A further delay of typically 20 seconds is included to allow the pyroelectric sensor to stabilize. This value varies depending on environmental conditions. After this delay, the system begins to look for motion. Prior to this delay, the MD signal remains inactive.

Figure 3 displays Power-on Reset operation. See the [Electrical Characteristics](#) chapter on page 54 for the POR voltage threshold (V_{POR}).

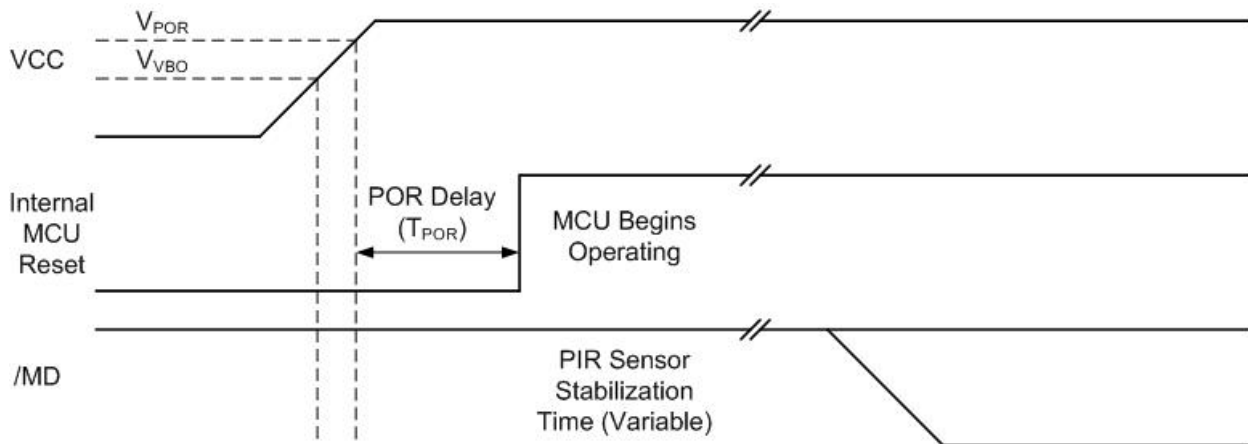


Figure 3. Power-On Reset Operation

The ZMOTION Detection Module provides low Voltage Brown-Out protection to ensure proper operation when the supply voltage drops below an unsafe level – below the VBO threshold voltage. The VBO circuit senses this condition and forces the Module into the Reset state. While the supply voltage remains below the POR voltage threshold (V_{POR}), the VBO block holds the Module in the Reset.

After the supply voltage again exceeds the Power-On Reset voltage threshold, the Module progresses through a full Power-On Reset sequence, as described in the Power-On Reset section. Figure 4 displays the Voltage Brown-Out operation. See the [Electrical Characteristics](#) chapter on page 54 for the VBO voltage threshold (V_{VBO}).

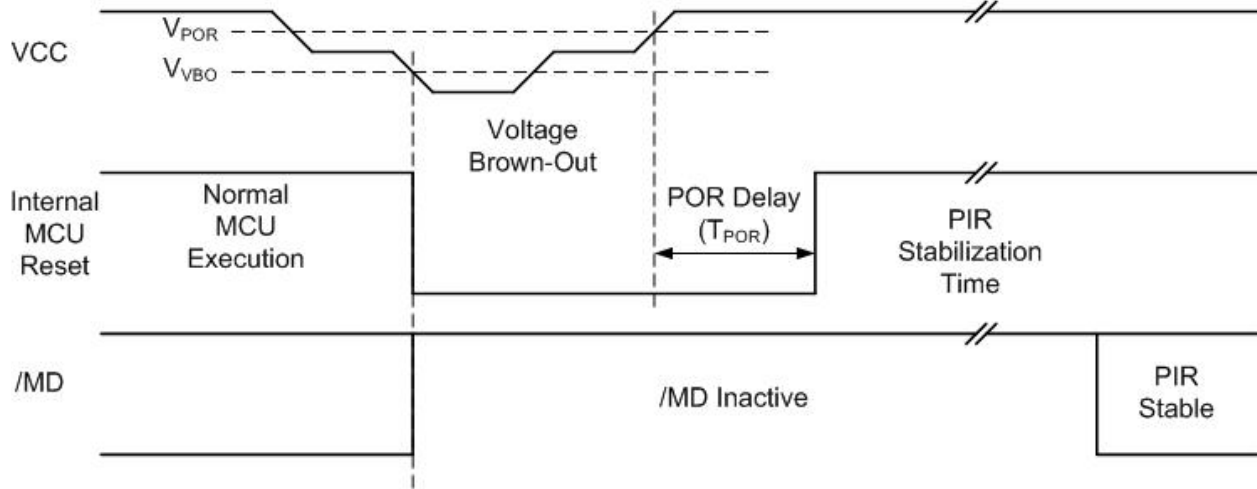


Figure 4. Voltage Brown-Out Reset Operation

Operation

When power is applied, the TXD/SNS pin is sampled to determine the mode of operation. If the signal is above 2.5V, serial interface mode is entered. If the signal is between 0V and 1.8V hardware interface mode is entered. During this time, the pyroelectric sensor is monitored and the device waits for it to become ready. Once it is stable, the device starts normal operation in the selected mode. In hardware interface mode, the DLY, SNS, LG and $\overline{\text{SLP}}$ signals are sampled regularly. In serial interface mode, TXD/RXD are used to communicate with the device and LG, $\overline{\text{SLP}}$ and $\overline{\text{MD}}$ also provide their defined functions.

Hardware Interface Mode

This mode of operation is selected when the SNS pin is at a value between 0V and 1.8V during power ON (or after a reset caused by V_{BO}). Once Hardware Interface mode has been established, this pin becomes the sensitivity input and accepts a voltage between 0V and 1.8V to set the motion detection sensitivity level.

- 0V = highest sensitivity
- 1.8V = lowest sensitivity

These sensitivity levels are normally achieved with a simple resistor divider or potentiometer resistor divider.

After application of power, the PIR sensor is allowed to stabilize. At this point, the MCU waits for the PIR sensor to stabilize; this period is typically 20 seconds but varies depending on environmental conditions. The software dynamically monitors the pyroelectric sensor during power up and begins detecting motion as soon as the sensor is stable.

The $\overline{\text{MD}}$ (Motion Detect) pin is driven active (Low) when motion is detected. The duration in which the signal remains active is determined by the voltage on the delay pin and can be set to a value between 2 seconds and 15 minutes. See [Table 2](#) on page 5.

The Light Gate signal acts as a disable (gate) for the $\overline{\text{MD}}$ signal. In a typical application, this signal is a representation of the ambient light in the environment. If there is light detected, the $\overline{\text{MD}}$ signal does not activate, even in the presence of motion. For an example showing how to use the ZMOTION Detection Module in Hardware Interface Mode, see [Appendix A. Hardware Interface Mode](#) on page 57.

SLEEP Mode in Hardware Interface Mode

In applications where motion detection is not always required, the Sleep signal can be used to put the device into a low power mode. The advantage of this feature vs. removing power from the Module is that the PIR stabilization time is much shorter.

If the Sleep ($\overline{\text{SLP}}$) input signal is driven Low, the device enters a low power SLEEP Mode and is awakened by deactivating the signal (driving the signal High).

Serial Interface Mode

The Serial Interface mode is implemented as a superset of the features available in Hardware interface mode. The interfacing device (Host) has an expanded feature set and more flexibility with many of those features. The interface is designed to be simple to implement on the host processor and use as few resources as possible.

This mode of operation is selected when the SNS pin is above 2.5V during power ON (or after a reset caused by V_{BO}). Typically this signal is tied to V_{DD} through a pull-up resistor. Once Serial Interface mode has been established, this pin becomes the Transmit Data (TXD) output and is used to send responses to commands given to the device.

The serial interface is asynchronous and is set to:

- 9600 baud
- No parity
- 8 data bits
- 1 stop bit
- No flow control

In Serial Interface Mode, commands are sent to the device over the RXD input pin and responses are sent from the device over the TXD output pin. The other signals on the device (\overline{MD} , LG, \overline{SLP}) remain active in Serial Interface mode.

Motion Detect (\overline{MD}) output is driven active for the time set by the Output Activation Time command when motion is detected. The signal is also gated by the (Light Gate) LG input. For an example of how to use the ZMOTION Detection Module in Serial Interface Mode, see [Appendix A. Hardware Interface Mode](#) on page 57.

SLEEP Mode in Serial Interface Mode

In applications where motion detection is not always required, the Sleep signal can be used to put the device into a low power mode. The advantage of this feature vs. removing power from the Module is that the PIR stabilization time is much shorter.

If the Sleep (\overline{SLP}) input signal is driven Low, the device enters a low-power SLEEP Mode and is awakened by either deactivating the signal (driving the signal High) or sending a character over the serial interface; the character is received and processed.

Serial Interface Commands and Description

The Serial Interface operates as a Host/Client relationship in which the Module is the client. Commands are sent from the Host and the Module responds with the requested information or confirmation. The only exception is when the Module is configured for \overline{MD} *Unsolicited* operation. In this mode, the Module will send *Motion Detected* information without first receiving a command from the host. All commands sent to the ZMOTION Detection Module are in ASCII character format; however, the data sent to and from the Module may be in ASCII or decimal formats.

There are three types of command structures accepted by the ZMOTION Detection Module; each is described in this section.

- Read commands
- Write commands
- Confirmation commands

Read Command Structure

Read commands are used to request information from the ZMOTION Detection Module, and are sent from the Host. The Module responds with the requested data.

- All Read commands are initiated by single lower-case letters.
- When a Read command is received, the Module returns the applicable value, as described in the [Serial Commands](#) section on page 15. See the example in Figure 5.

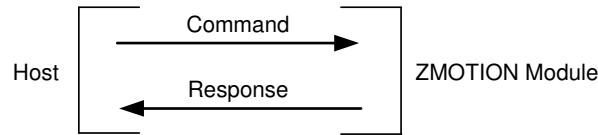


Figure 5. Read Command Structure

Write Command Structure

Write commands are used to update the configuration of the ZMOTION Detection Module, and are sent from the Host. The Module responds with the current value as an acknowledgment. The Host then sends the new data and the Module responds with an ACK.

- All write commands are initiated by single upper-case letters.
- After a write command is received, the device returns the current value and expects an appropriate single-byte data value.
- When the data value is received, the device returns an ACK. If no data is received after the inactivity time-out period of 2.5 seconds, the device returns a NACK. See the example in Figure 6.

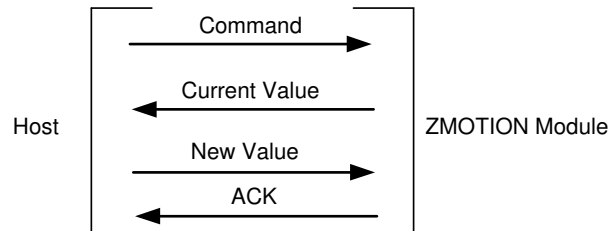


Figure 6. Write Command Structure

Confirmed Command Structure

Certain commands require a specific sequence of characters to be sent to prevent accidental initiation. These commands require a 4-character confirmation sequence. After a command requiring confirmation is received, the device returns an ACK.

- If the sequence is correct, the device returns an ACK and executes the command.
- If the sequence is incorrect, or if there is an inactivity delay of more than 2.5 seconds between any characters of the sequence, the device immediately sends a NACK and does not execute the command. See the example in Figure 7.

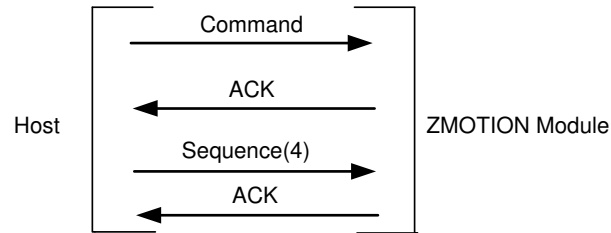


Figure 7. Confirmed Command Structure

► **Notes:** ACK = 0x06 (ASCII ACK character).

NACK = 0x15 (ASCII NACK character). The Module will respond with a NACK on all unrecognized commands, and when commands requiring data (that is, Write, Clear, and Confirmation types) do not receive the required data within the inactivity time-out period.

Table 3. Summary of Serial Interface Commands

Command Name	Value [Default]	Command Name	Value [Default]		
0x43-'C'	Write MD/RST Pin Configuration	'M', 'R'	0x64-'d'	Read MD Activation Time	0-255 [2]
0x44-'D'	Write MD Activation Time	0-255	0x65-'e'	Read Hyper Sense Setting	'Y', 'N' [N]
0x45-'E'	Write Hyper Sense Setting	'Y', 'N'	0x66-'f'	Read Frequency Response Setting	'H', 'L' [L]
0x46-'F'	Write Frequency Response Setting	'H', 'L'	0x67-'g'	Read Hyper Sense Level	0-3 [1]
0x47-'G'	Write Hyper Sense Level	0-3	0x68-'h'	Read Motion Detection Suspend Setting	'Y', 'N' [N]
0x48-'H'	Write Motion Detection Suspend Setting	'Y', 'N'	0x69-'i'	Read Module Software Revision	0-255, 0-255 [6,4]
0x4B-'K'	Write Serial Interface Command Mode	'D', 'A'	0x6B-'k'	Read Serial Interface Command Mode	'D', 'A' [D]
0x4C-'L'	Write Light Gate Threshold	0-255	0x6C-'l'	Read Light Gate Threshold	0-255 [100]
0x4F-'O'	Write MD Output State	0-255	0x6D-'m'	Read Motion Detected Unsolicited Mode	'Y', 'N' [N]
0x50-'P'	Write Ping Value	0-255	0x4D-'M'	Write Motion Detected Unsolicited Mode	'Y', 'N'
0x52-'R'	Write Range Setting	0-7	0x6F-'o'	Read MD Current Output Active Time	0-255 [0]
0x53-'S'	Write Sensitivity	0-255	0x70-'p'	Read Ping Value	0-255 [1]
0x55-'U'	Write Dual Directional Mode	'Y', 'N'	0x72-'r'	Read Range Setting	0-7 [2]
0x58-'X'	Module Reset	'1', '2', '3', '4'	0x73-'s'	Read Sensitivity	0-255 [16]
0x59-'Y'	Write Sleep Time	0-255	0x75-'u'	Read Dual Directional Mode	'Y', 'N' [N]
0x5A-'Z'	SLEEP Mode	'1', '2', '3', '4'	0x76-'v'	Read Single Directional Mode	'A', '+', '-' [A]
0x61-'a'	Read Motion Status	'Y', 'N', 'U'	0x56-'V'	Write Single Directional Mode	'A', '+', '-'
0x62-'b'	Read Current Light Gate Input Level	0-255	0x79-'y'	Read Sleep Time	0-255 [0]
0x63-'c'	Read MD/RST Pin Configuration	'M', 'R' [R]			

Serial Commands

The Serial Interface commands summarized in Table 3 are each described in this section.

Motion Status Command

The current status of detected motion can be read and cleared through this command. When motion has been detected the value is set to 'Y' and latched until read with the 'a' command. Once cleared, the status remains at 'N' until motion is again detected.

Read Motion Status

Command

'a' (0x61)

Description

The Read Motion Status command returns the current status of detected motion. The current status is set to 'N' when read.


Return Values

'Y' = Motion detected

'N' = No motion detected

'U' = PIR Sensor has not stabilized after power-up

Normal Command Sequence

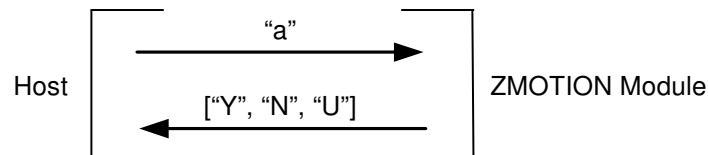

► **Note:** The returned value ('Y', 'N', 'U') is independent of the \overline{MD} output state or the \overline{MD} Activation Time (see commands 'o'/'O' and 'd'/'D').

Light Gate Level Commands

Light Gate Level commands control and monitor the signal associated with the Light Gate (LG) pin, and they are typically relative to the ambient light detected by an externally connected CDS photocell. The range is 0 to 255, with 0 indicating maximum ambient light and, 255 indicating minimum ambient light. See [Appendix A. Hardware Interface Mode](#) on page 57 and [Appendix B. Serial Interface Mode](#) on page 58 for recommended CDS photocell connections. The 'b' command reads the current signal level present on the pin.

The 'L' command sets the Light Gate Threshold value. This value is used in conjunction with the signal on the LG pin to internally gate the \overline{MD} signal such that it does not activate in the presence of ambient light. When the signal on the Light Gate (LG) pin is below this value, the \overline{MD} output signal remains inactive even when motion has been detected. When the signal on the Light Gate (LG) pin is above this value, the \overline{MD} signal activates normally when motion has been detected.

Table 4 lists the pages in this section that describe their respective commands.

Table 4. Shortcuts to Light Gate Level Commands

Name	Command	Page
Read Current Light Gate Input Level	'b' (0x62)	16
Read Light Gate Threshold	'l' (0x6C)	17
Write Light Gate Threshold	'L' (0x4C)	17

Read Current Light Gate Input Level

Command

'b' (0x62)


Description

The 'b' command returns the current signal level present on the Light Gate (LG) pin.

Return Values

0–255 (decimal)

Normal Command Sequence

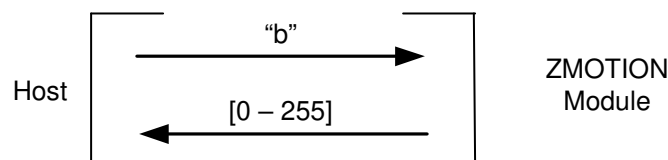

Read Light Gate Threshold

Command

'1' (0x6C)


Description

The '1' command returns the current Light Gate threshold value set by the Write Light Gate Threshold command.

Return Values

0-255 (decimal)

Normal Command Sequence

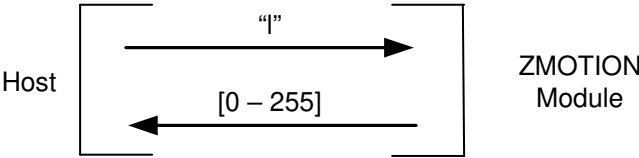

Write Light Gate Threshold

Command

'L' (0x4C)


Description

The 'L' command sets the Light Gate Threshold value.

Input Values

0-255 (decimal)

Normal Command Sequence

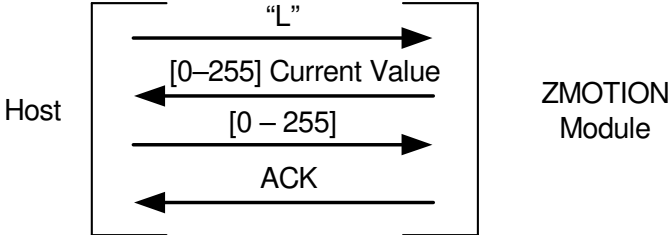

$\overline{\text{MD}}/\overline{\text{RST}}$ Pin Configuration

The $\overline{\text{MD}}/\overline{\text{RST}}$ pin can be configured to function as either the Motion Detect output or the Reset input. This command selects between the two modes. As $\overline{\text{RST}}$, a Low on this pin causes the Module to perform a full hardware reset. See [Signal Descriptions, Serial Interface Mode](#) on page 6 for more information.

Read $\overline{\text{MD}}/\overline{\text{RST}}$ Pin Configuration

Command

'c' (0x63)

Description


This Read command returns the configuration mode of the $\overline{\text{MD}}/\overline{\text{RST}}$ pin as set by the 'C' command.

Return Values

'M' = $\overline{\text{MD}}/\overline{\text{RST}}$ pin configured as $\overline{\text{MD}}$

'R' = $\overline{\text{MD}}/\overline{\text{RST}}$ pin configured as $\overline{\text{RST}}$

Normal Command Sequence

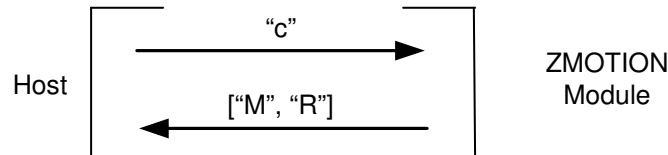

Write $\overline{\text{MD}}/\overline{\text{RST}}$ Pin Configuration

Command

'C' (0x43)

Description

Configures the $\overline{\text{MD}}/\overline{\text{RST}}$ pin as either Motion Detect output ($\overline{\text{MD}}$) or Module Reset ($\overline{\text{RST}}$).

Input Values

'M' = Configure $\overline{\text{MD}}/\overline{\text{RST}}$ pin as $\overline{\text{MD}}$

'R' = Configure $\overline{\text{MD}}/\overline{\text{RST}}$ pin as $\overline{\text{RST}}$