



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





ZMOTION[®] Pyroelectric Sensors

Product Specification

PS033604-0418





Warning: DO NOT USE THIS PRODUCT IN LIFE SUPPORT SYSTEMS.

LIFE SUPPORT POLICY

ZILOG'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF ZILOG CORPORATION.

As used herein

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

Document Disclaimer

©2018 Zilog, Inc All rights reserved. Information in this publication concerning the devices, applications, or technology described is intended to suggest possible uses and may be superseded. ZILOG, INC. DOES NOT ASSUME LIABILITY FOR OR PROVIDE A REPRESENTATION OF ACCURACY OF THE INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED IN THIS DOCUMENT. ZILOG ALSO DOES NOT ASSUME LIABILITY FOR INTELLECTUAL PROPERTY INFRINGEMENT RELATED IN ANY MANNER TO USE OF INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED HEREIN OR OTHERWISE. The information contained within this document has been verified according to the general principles of electrical and mechanical engineering.

ZMOTION and Z8 Encore! XP are trademarks or registered trademarks of Zilog, Inc. (An IXYS Company). All other product or service names are the property of their respective owners.

Revision History

Each instance in the revision history table reflects a change to this document from its previous revision. For more details, refer to the corresponding pages or appropriate links provided in the table below.

Date	Revision Level	Description	Page
Apr 2018	04	Added the ZSFG469711 pyroelectric sensor to Table 1 ; Updated the Pyro Sensor Specifications section to include ZSFG469711 configuration and characteristics.	2 , 15
Jan 2018	03	Added dimensions to the Side view drawing in Figure 4.	9
Sep 2017	02	Updated drawings for the ZSBG323671 and ZSBG446671 pyro sensors.	9 , 13
Dec 2014	01	Original issue, split into its own document from the former ZMOTION Lens and Pyroelectric Sensor Product Specification (PS0286), which is now titled ZMOTION Lenses Product Specification.	All

Table of Contents

Revision History	iii
Table of Contents	iv
List of Figures	vi
List of Tables	vi
Overview	1
ZMOTION Pyroelectric Sensor Selection Guide	2
ZMOTION Pyroelectric Sensor Specifications	3
ZRE200GE Sensor Specification	3
Type of Sensor	3
Physical Configuration	3
Electrical Characteristics @ 25 ±5°C	3
Optical Characteristics	4
Environmental Requirements	4
RoHS Compliance	4
ZSBG323671 Sensor Specification	7
Type of Sensor	7
Physical Configuration	7
Electrical Characteristics @ 25 ±5°C	7
Optical Characteristics	8
Environmental Requirements	8
RoHS Compliance	8
Mechanical Drawings	9
ZSBG446671 Sensor Specification	11
Type of Sensor	11
Physical Configuration	11
Electrical Characteristics @ 25 ±5°C	11
Optical Characteristics	12
Environmental Requirements	12
RoHS Compliance	12
Mechanical Drawings	13
ZSFG469711 Sensor Specification	15
Type of Sensor	15
Physical Configuration	15
Electrical Characteristics @ 25 ±5°C	16
Optical Characteristics	17

Environmental Requirements	17
RoHS Compliance	17
Mechanical Drawings	17
Precautions	21
Design Restrictions and Precautions	21
Usage Restrictions and Precautions	21
Assembly Restrictions and Precautions	21
Handling and Storage Restrictions and Precautions	22
Restrictions on Product Use	22
Related Documents	23
Customer Support	24

List of Figures

Figure 1.	ZRE200GE Mechanical Configuration	5
Figure 2.	ZRE200GE Circuit Configuration	6
Figure 3.	ZRE200GE Test Setup Block Diagram	6
Figure 4.	ZSBG323671 Mechanical Configuration	9
Figure 5.	ZSBG323671 Circuit Configuration	10
Figure 6.	ZSBG323671 Test Setup Block Diagram	10
Figure 7.	ZSBG446671 Mechanical Configuration	13
Figure 8.	ZSBG446671 Circuit Configuration	14
Figure 9.	ZSBG446671 Test Setup Block Diagram	15
Figure 10.	ZSFG469711 Mechanical Configuration	18
Figure 11.	ZSFG469711 Circuit Configuration	19
Figure 12.	ZSFG469711 Test Setup Block Diagram	20

List of Tables

Table 1.	ZMOTION Pyroelectric Sensors	2
----------	------------------------------	---

Overview

Zilog's ZMOTION Detection and Control and Intrusion Detection product families provide integrated and flexible solutions for Passive Infrared (PIR)-based motion detection applications. These product families are based on the ZMOTION MCU, a high-performance microcontroller featuring integrated PIR motion detection algorithms. Each family includes a selection of lenses and PIR sensors to fit a wide range of application requirements. Each lens and sensor combination is optimized for its intended application by configuration settings loaded into the ZMOTION MCU ensuring the best possible performance while significantly reducing development risk and minimizing time to market. Zilog's PIR Motion Detection Technology provides a dramatic improvement in both sensitivity and stability over traditional designs and is scalable to many market segments including Security/Intrusion Detection, Lighting Control, HVAC, Access Control, Vending, Display, Proximity, Power Management, Occupancy Sensing and many others.

This document provides the optical, electrical, and mechanical specifications for the Zilog-supported pyroelectric sensors included in the ZMOTION Family. Each supported lens and pyroelectric sensor combination is provided with an associated configuration file for the ZMOTION MCU. For more information on configuration files for specific lens and sensor combinations, refer to [WP0018 ZMOTION Detection Lens and Pyro Electric Sensor Configuration Guide](#). It is possible to use other lenses and pyroelectric sensors not directly supported by Zilog by developing the appropriate configuration settings based on one of the existing files.

All pyroelectric sensors listed in this document are available from Zilog or from their associated manufacturers. Because Zilog is regularly adding new sensor support to these ZMOTION product families, please obtain the latest version of this document from our website at zillog.com/ZMOTION.

ZMOTION Pyroelectric Sensor Selection Guide

[Table 1](#) presents a short list of available pyroelectric sensors that support applications that employ ZMOTION Detection and Control and ZMOTION Intrusion Detection MCUs. Select your pyroelectric sensor from this table based on your intended application.

Table 1. ZMOTION Pyroelectric Sensors

Part Number	Description	Recommended Applications	Recommended PIR Lens Type(s)
ZRE200GE	Basic dual-element sensor <ul style="list-style-type: none"> • Two sensitive areas, 1.0mm x 2.0mm, spaced 1.0mm apart • Low cost 	<ul style="list-style-type: none"> • Occupancy/Vacancy sensors • HVAC/energy management sensors • Intrusion motion detectors • Smart appliances 	Narrow- to wide-angle wall-mount Fresnel lenses
ZSBG323671	Premium dual-element sensor <ul style="list-style-type: none"> • Two sensitive areas, 1.0mm x 2.3mm, spaced 1.0mm apart • Internal EMI protection 	<ul style="list-style-type: none"> • Intrusion motion detectors • Occupancy/Vacancy sensors • HVAC/energy management sensors • Smart appliances 	Narrow- to wide-angle wall-mount Fresnel lenses
ZSBG446671	Premium quad-element sensor <ul style="list-style-type: none"> • Four sensitive areas, 1.0mm x 1.0mm, spaced 1.0mm apart • Symmetrical sensor organization, optimized for ceiling-mount applications • Internal EMI protection 	<ul style="list-style-type: none"> • Occupancy/Vacancy sensors • HVAC/energy management sensors • Intrusion motion detectors 	Circular ceiling-mounted Fresnel lenses
ZSFG469711	Premium dual-element sensor with circular pattern <ul style="list-style-type: none"> • Two sensitive areas in a tapered circular shape • Optimized for ceiling mount applications • Internal EMI protection 	<ul style="list-style-type: none"> • Occupancy/Vacancy sensors • Ceiling mount 360 degree motion detectors • Lighting control • HVAC 	Circular 360 degree lenses

ZMOTION Pyroelectric Sensor Specifications

This chapter presents specifications for the pyroelectric sensors selected for the ZMOTION family of products. To see the specifications for lenses used in Zilog's ZMOTION Detection and Control and Intrusion Detection applications, refer to the [ZMOTION Lenses Specification \(PS0286\)](#).

ZRE200GE Sensor Specification

This section describes the specifications for the ZRE200GE passive infrared pyroelectric sensor.

Type of Sensor

Balanced differential (series-opposed type.)

Physical Configuration

Package	TO-5 nickel-plated metal can with dimensions; see Side View, Figure 1 on page 5.
Element geometry	Two sensitive areas 2.0mm long, 1.0mm wide and spaced 1.0mm apart.
Element orientation	See Top View, Figure 1 on page 5.
Lead configuration	See Side and Base views, Figure 1 on page 5.

Electrical Characteristics @ 25 ±5°C

Circuit configuration	Three-terminal sensor with source follower; see Figure 2 on page 6.
Operating voltage	3–10V DC ($R_s = 47\text{K}\Omega$).
Source voltage	0.3–1.5V; $V_D = 5\text{V}$, $R_s = 47\text{K}\Omega$.
Signal output	Minimum 2.5V _{P-P} ; typically 4.0V _{P-P} . Signal output is measured at a chopper frequency of 1Hz when connected to an amplifier with a gain of 72.5dB at 1Hz and submitted to an infrared energy emission of 13 microW/cm ² from a 420K black body. See Figure 3 on page 6.

Noise output	Max. 250 mV _{p-p} ; typically 90mV _{p-p} . Noise output should be measured for 20 seconds when connected to an amplifier with a gain of 72.5dB at 1 Hz and shielded from infrared energy. See Figure 3 on page 6.
Balance output	Max. 15%. [$BO / SA+SB \leq 0.15$, in which: BO = Balance output SA = Signal output on Element A SB = Signal output on Element B Balance output is measured at a chopper frequency of 1 Hz when connected to an amplifier with a gain of 72.5dB at 1 Hz and submitted to an infrared energy emission of 13 microW/cm ² from a 420K black body. See Figure 3 on page 6.
Frequency response	0.3Hz to 3.0Hz / ±10dB.

Optical Characteristics

Field of view	138° from center of element on Axis X. 125° from center of element on Axis Y. See Field of View, Figure 1.
Filter substrate	Silicon.
Cut on (5 %T ABS)	5.0 ±0.5 μm.
Transmission	≥ 70%; average 7–14 μm.

Environmental Requirements

Operating temperature	–30°C to +70°C.
Storage temperature	–40°C to +80°C.
Relative humidity	The sensor operates without an increase in noise output when continuously exposed to 90–95% RH at 30°C.
Hermetic seal	The sensor must be sealed to withstand a vacuum of 21.28kPa.

RoHS Compliance

The ZRE200GE Sensor conforms to the RoHS directive in force at the date of issuance of this specification.

Figures 1 and 2 present mechanical drawings of the ZRE200GE pyroelectric sensor.


Field of view

(Figure 1-a)




Top view

(Figure 1-b)

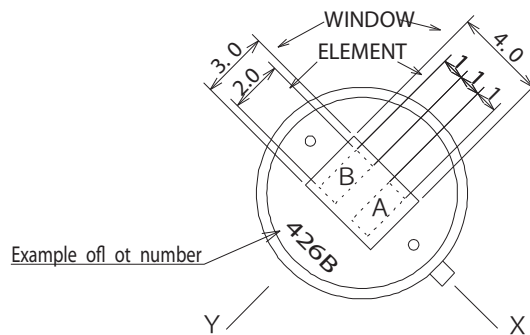


Side view

(Figure 1-c)

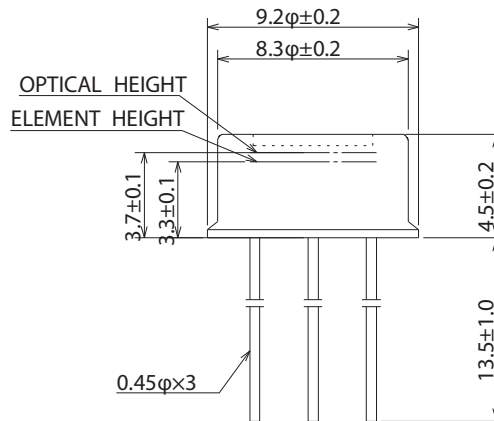

Base view


(Figure 1-d)

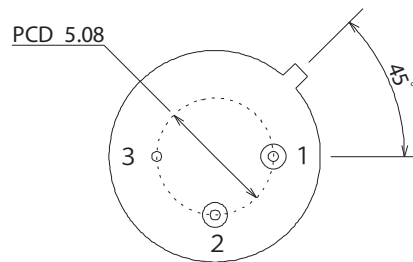

- 1: Drain
- 2: Source
- 3: Ground

unit : mm

Figure 1. ZRE200GE Mechanical Configuration

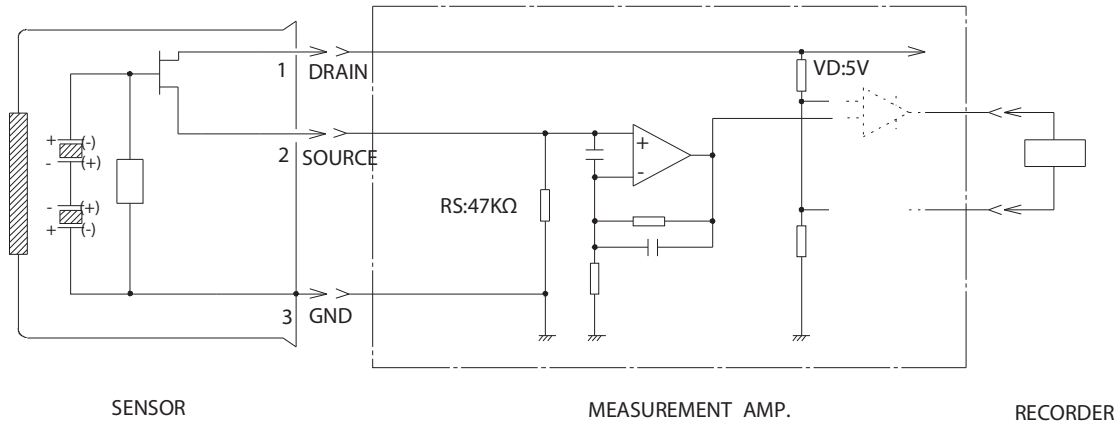

Measurement Amp.: Non-inverted type, gain 72.5 dB at 1 Hz , 0.4 to 2.7 Hz / -3 dB

Figure 2. ZRE200GE Circuit Configuration

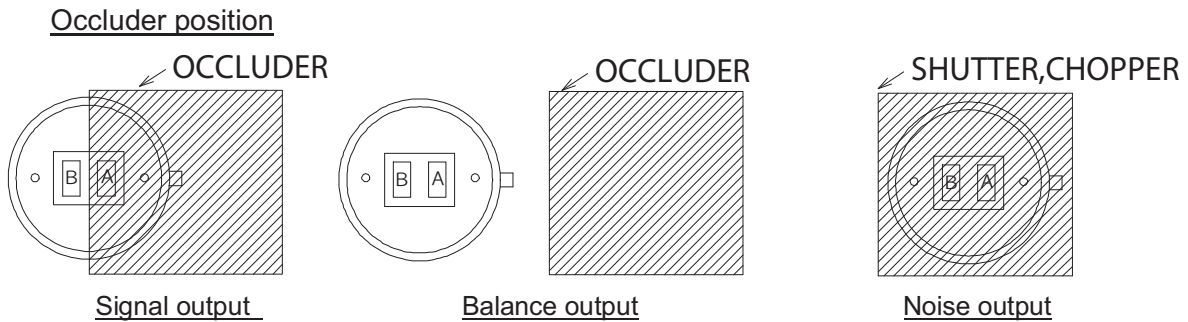
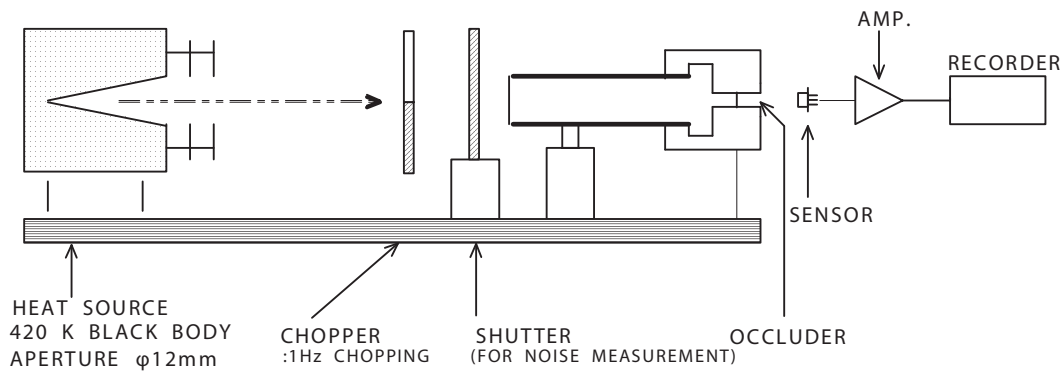


Figure 3. ZRE200GE Test Setup Block Diagram

ZSBG323671 Sensor Specification

This section describes the specifications for the ZSBG323671 passive infrared pyroelectric sensor.

Type of Sensor

Balanced differential (series-opposed type.)

Physical Configuration

Package	TO-5 nickel-plated metal can with dimensions as shown in Side View, Figure 4 on page 9.
Element geometry	Two sensitive areas 2.3 mm long, 1.0 mm wide and spaced 1.0 mm apart.
Element orientation	See Top View, Figure 4 on page 9.
Lead configuration	See Side and Base views, Figure 4 on page 9.

Electrical Characteristics @ 25 ±5°C

Circuit configuration	Three-terminal sensor with source follower; see Figure 5 on page 10.
Operating voltage	3–10 V DC (R _s : 470 KΩ).
Source voltage	0.35–1.4 V (V _D : 5 V vs. 470 KΩ).
Signal output	Minimum 2.6 V _{P-P} ; typically 4.0 V _{P-P} . Signal output is measured at a chopper frequency of 1 Hz when connected to an amplifier with a gain of 72.5 dB at 1 Hz and submitted to an infrared energy emission of 13 microW/cm ² from a 420 K black body. See Figure 6 on page 10.
Noise output	Max. 250 mV _{P-P} ; typically 90 mV _{P-P} . Noise output should be measured for 20 seconds when connected to an amplifier with a gain of 72.5 dB at 1 Hz and shielded from infrared energy. See Figure 6 on page 10.

Balance output	Max. 10%. [$BO / SA+SB \leq 0.10$, in which: BO = balance output SA = signal output on Element A SB = signal output on Element B Balance output is measured at a chopper frequency of 1 Hz when connected to an amplifier with a gain of 72.5 dB at 1 Hz and submitted to an infrared energy emission of 13 microW/cm ² from a 420K black body. See Figure 6 on page 10.
Frequency response	0.3 Hz to 3.0 Hz / ± 10 dB.

Optical Characteristics

Field of view	134° from center of element on Axis X. 120° from center of element on Axis Y. See Field of View, Figure 4.
Filter substrate	Silicon.
Cut on (5 %T ABS)	$5.5 \pm 0.5 \mu\text{m}$.
Transmission	$\geq 70\%$; average 8–13 μm .

Environmental Requirements

Operating temperature	-30°C to $+70^{\circ}\text{C}$.
Storage temperature	-40°C to $+80^{\circ}\text{C}$.
Relative humidity	The sensor operate without an increase in noise output when continuously exposed to 90–95% RH at 30°C.
Hermetic seal	The sensor must be sealed to withstand a vacuum of 21.28 kPa.

RoHS Compliance

The ZSBG323671 Sensor conforms to the RoHS directive in force at the date of issuance of this specification.

Mechanical Drawings

Figures 4 through 6 present mechanical drawings of the ZSBG323671 pyro sensor.


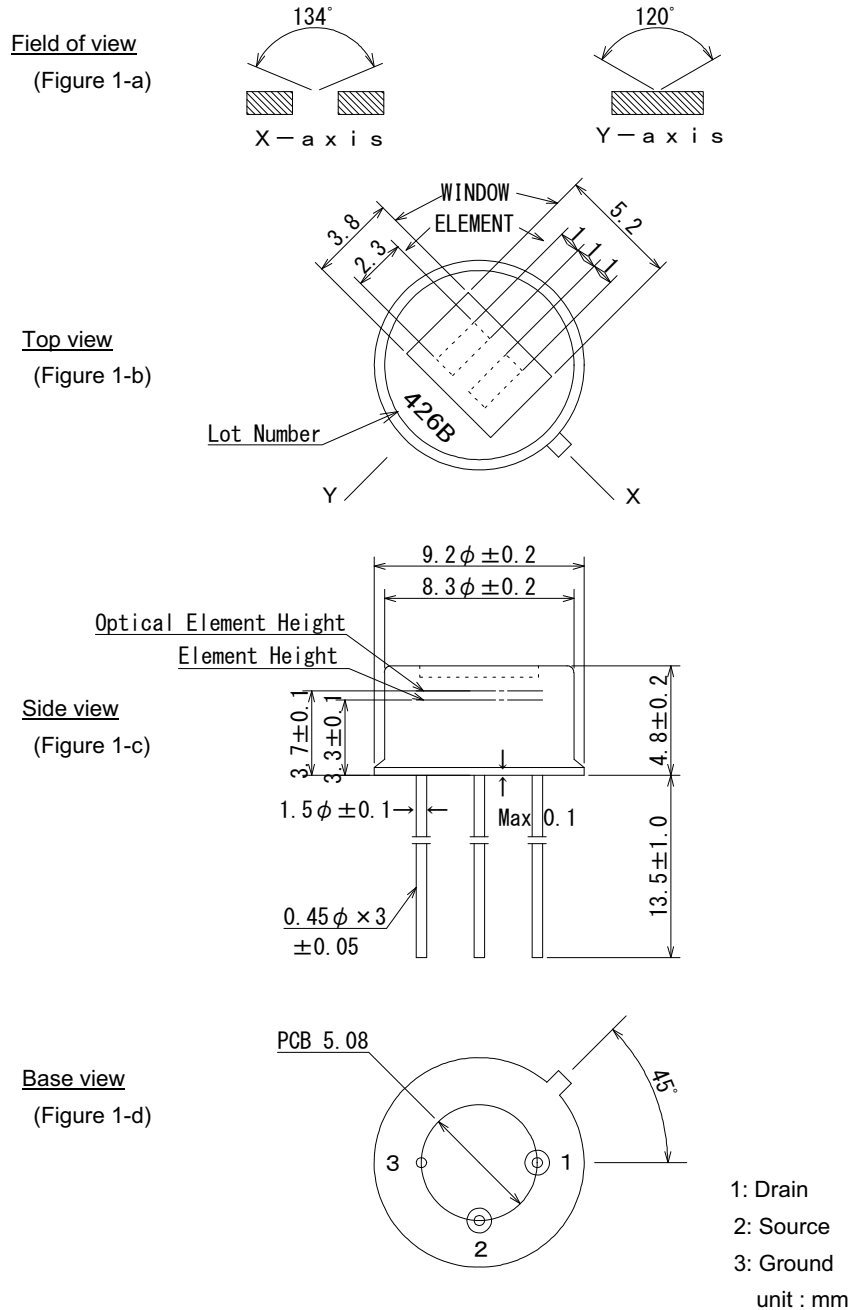


Figure 4. ZSBG323671 Mechanical Configuration

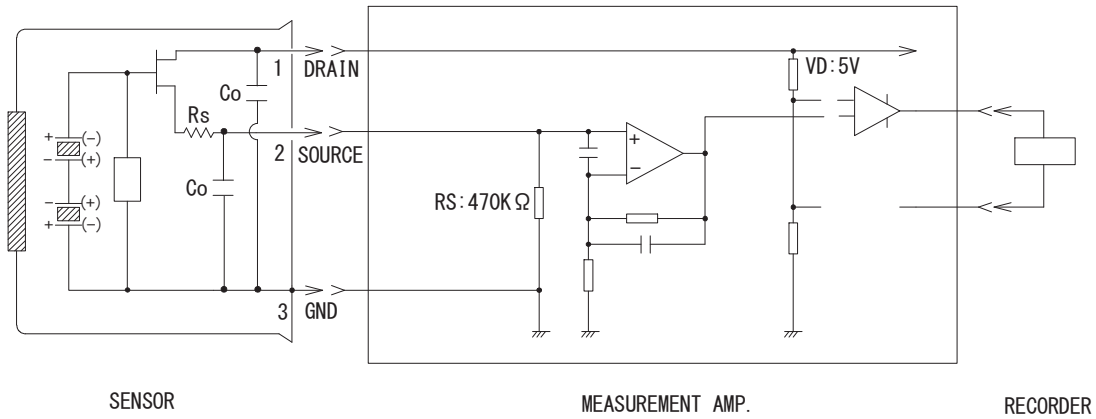

Measurement Amp.: Non-inverted type, gain 72.5 dB at 1 Hz, 0.4 to 2.7 Hz / -3 dB

Figure 5. ZSBG323671 Circuit Configuration

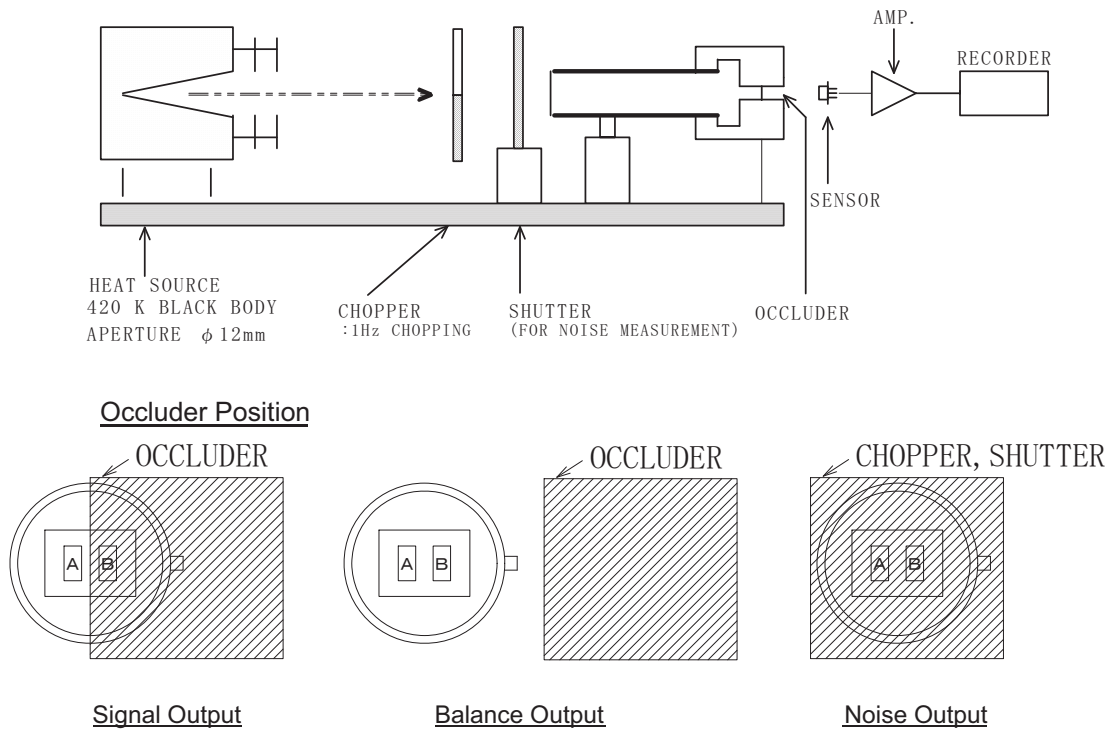


Figure 6. ZSBG323671 Test Setup Block Diagram

ZSBG446671 Sensor Specification

This section describes the specifications for the ZSBG446671 passive infrared pyroelectric sensor.

Type of Sensor

Balanced differential (series-opposed type.)

Physical Configuration

Package	TO-5 nickel-plated metal can with dimensions as shown in Side View, Figure 7 on page 13.
Element geometry	Four sensitive areas 1.0 mm * 1.0mm and spaced 1.0mm apart.
Element orientation	See Top View, Figure 7 on page 13.
Lead configuration	See Side and Base views, Figure 7 on page 13.

Electrical Characteristics @ 25 ±5°C

Circuit configuration	Three-terminal sensor with source follower; see Figure 8 on page 14.
Operating voltage	3–10V DC (Rs: 470KΩ).
Element polarity	Element A,C:(+) B,D:(-) or A,C:(-) B,D:(+).
Source voltage	0.35–1.4V (Vd: 5V vs. 470KΩ).
Signal output	Min. 4.5V _{p-p} ; typically 6.5 V _{p-p} . (S1, S2) signal output is measured at a chopper frequency of 1Hz when connected to an amplifier with a gain of 72.5dB at 1 Hz and submitted to an infrared energy emission of 13 microW/cm ² from a 420K black body; see Figure 9 on page 15.
Noise output	Max. 250 mV _{p-p} ; typically 90mV _{p-p} . Noise output should be measured for 20 seconds when connected to an amplifier with a gain of 72.5dB at 1 Hz and shielded from infrared energy; see Figure 9 on page 15.

Balance output	<p>Max. 15%.</p> $\left[\frac{ S1-S2 }{ S1+S2 } \leq 0.15 \right]$ <p>S1 = signal output on Elements A + C S2 = signal output on Elements B + D</p> <p>Balance output is measured at a chopper frequency of 1 Hz when connected to an amplifier with a gain of 72.5 dB at 1 Hz and submitted to an infrared energy emission of 13 microW/cm² from a 420K black body. See Figure 9 on page 15.</p>
Frequency response	0.3 Hz to 3.0 Hz / ±10 dB.

Optical Characteristics

Field of view	<p>132° from center of element on Axis X. 146° from center of element on 45°. See Field of View, Figure 4.</p>
Filter substrate	Silicon.
Cut on (5 %T ABS)	5.5 ±0.5 μm.
Transmission	≥ 70%; average 8–13 μm.

Environmental Requirements

Operating temperature	–30°C to +70°C.
Storage temperature	–40°C to +80°C.
Relative humidity	The sensor operate without an increase in noise output when continuously exposed to 90–95% RH at 30°C.
Hermetic seal	The sensor must be sealed to withstand a vacuum of 21.28 kPa.

RoHS Compliance

The ZSBG446671 Sensor conforms to the RoHS directive in force at the date of issuance of this specification.

Mechanical Drawings

Figures 7 through 9 present mechanical drawings of the ZSBG446671 pyro sensor.



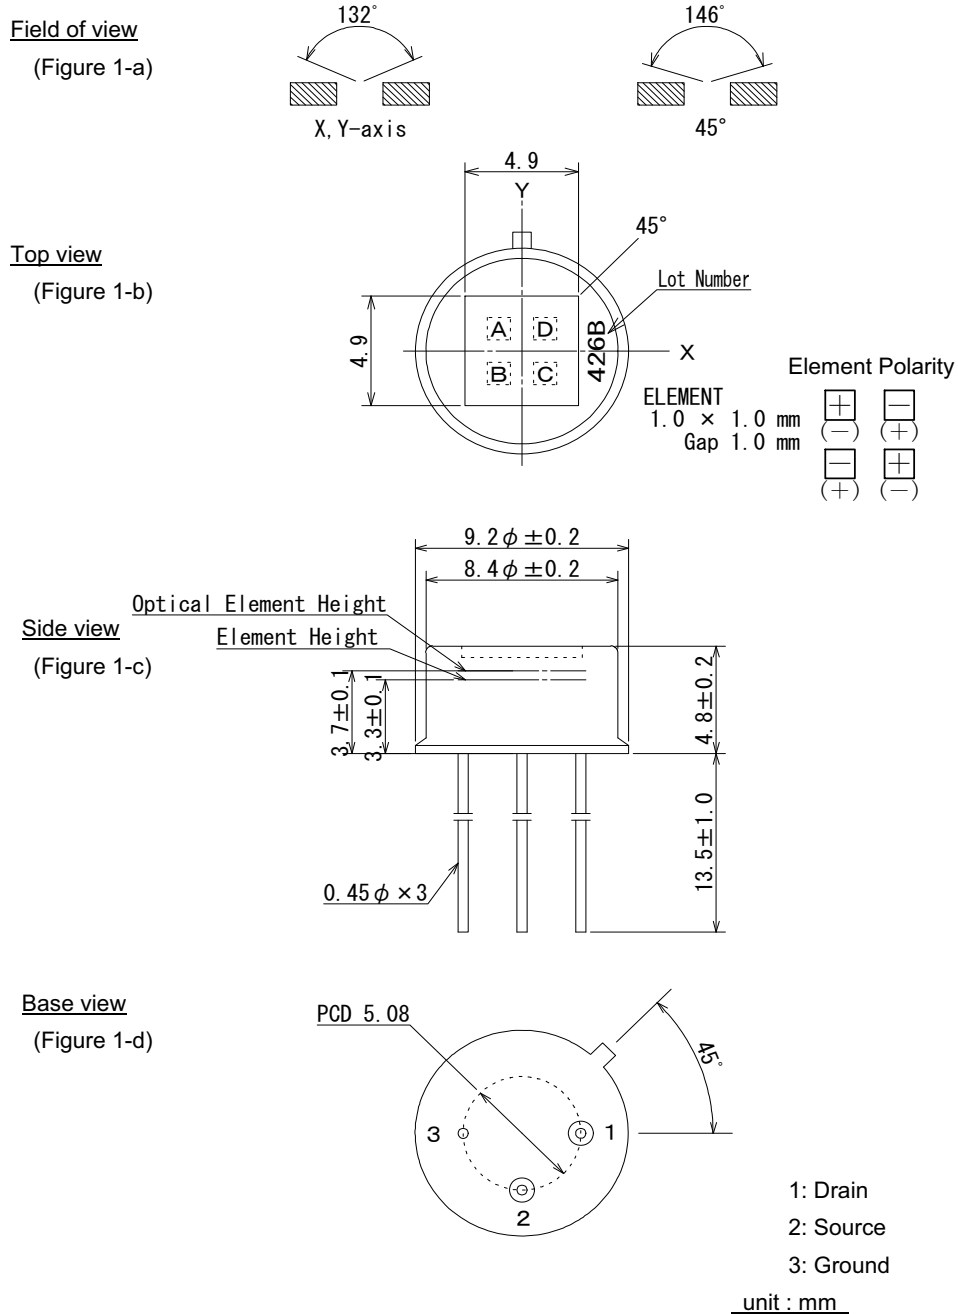


Figure 7. ZSBG446671 Mechanical Configuration

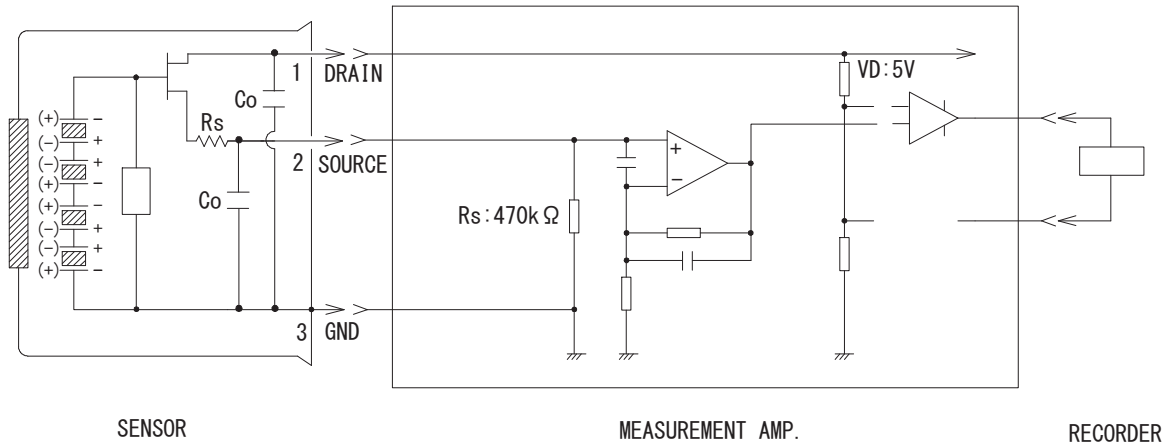

Measurement Amp.: Non-inverted type, gain 72.5 dB at 1 Hz , 0.4 to 2.7 Hz / -3 dB

Figure 8. ZSBG446671 Circuit Configuration

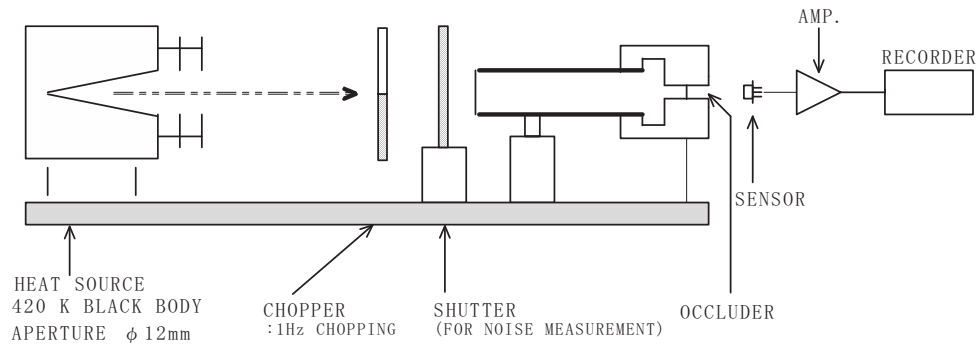

Occluder position

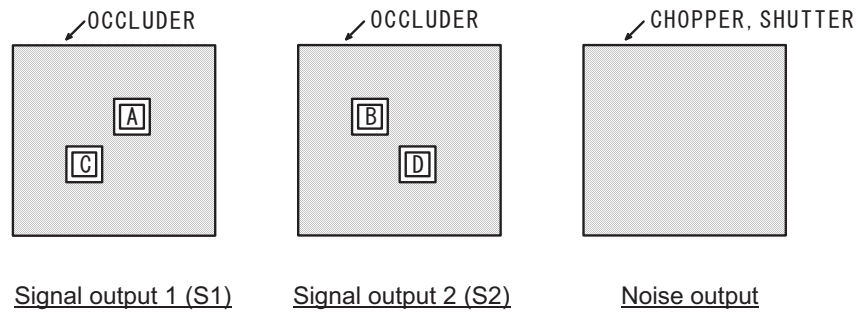


Figure 9. ZSBG446671 Test Setup Block Diagram

ZSFG469711 Sensor Specification


This section describes the specifications for the ZSFG469711 passive infrared pyroelectric sensor.

Type of Sensor

Balanced differential (series-opposed type).

Physical Configuration

Package	TO-5 metal can with dimensions shown in Figure 1-c (Ni-plated).
Element geometry	Two sensitive areas 7.24 mm ² .
Element orientation	See Figure 10 on page 18.
Lead configuration	See Figure 10 on page 18.
Code	Lot number is marked on top surface of detector. To show last one digit of the A.D. year and week of the year of an inspection completion Identification code.

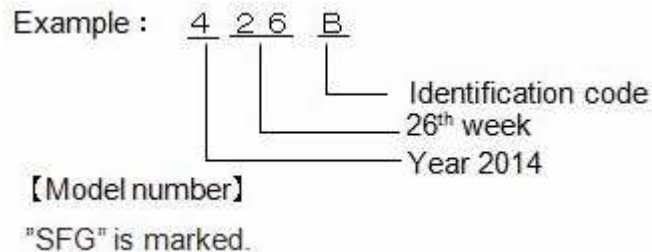

Electrical Characteristics @ 25 ±5°C

Circuit configuration	Three-terminal sensor with source follower. See Figure 11 on page 19.
Operating voltage	1 ~ 15 V dc (Rs: 470kohm).
Source voltage	0.3 ~ 1.4 V (Vd: 5V, Rs: 470kohm).
Signal output	Min. 3.0 Vp-p (Typ. 5.0 Vp-p). Signal output is measured at chopper frequency of 1 Hz when connected to the amplifier of gain 72.5 dB (at 1 Hz) and submitted to the emission of Infrared energy of 13 microW/cm ² from 420 K Black Body. See Figure 12 on page 20.

Noise output	Max. 200 mVp-p (Typ. 60 mVp-p). Noise output shall be measured for 20 seconds when connected to the amplifier of gain 72.5 dB (at 1 Hz) and shut out from Infrared energy. See Figure 12 on page 20.
Balance output	Max. 20 % $[Bo / SA+SB] \leq 0.20$. Bo : Balance output. SA : Signal output on Element A. SB : Signal output on Element B. Balance output is measured at chopper frequency of 1 Hz when connected to the amplifier of gain 72.5 dB (at 1 Hz) and submitted to the emission of Infrared energy of 13 microW/cm ² from 420 K Black Body. See Figure 12 on page 20.
Frequency response	0.3 Hz to 3.0 Hz / (+/-) 10 dB.

Optical Characteristics

Field of view	132° from center of element on axis X. 146° from center of element on axis Y. See Figure 10 on page 18.
Filter substrate	Silicon.
Cut on (5 %T ABS)	5 (+/-) 1 micron.
Transmission	≥ 70 % average 8 to 13 micron.

Environmental Requirements

Operating Temperature	-40°C to +85°C.
Storage Temperature	-40°C to +85°C.
Relative Humidity	The sensor shall operate without increase in noise output when exposed to 90 ~ 95 % RH at 30°C continuously.
Hermetic Seal	The sensor shall be sealed to withstand a vacuum of 21.28 kPa.

RoHS Compliance

The ZSFG469711 Sensor conforms to the RoHS directive in force at the date of issuance of this specification.

Mechanical Drawings

Figures 10 through 12 present mechanical drawings of the ZSFG469711 pyro sensor.


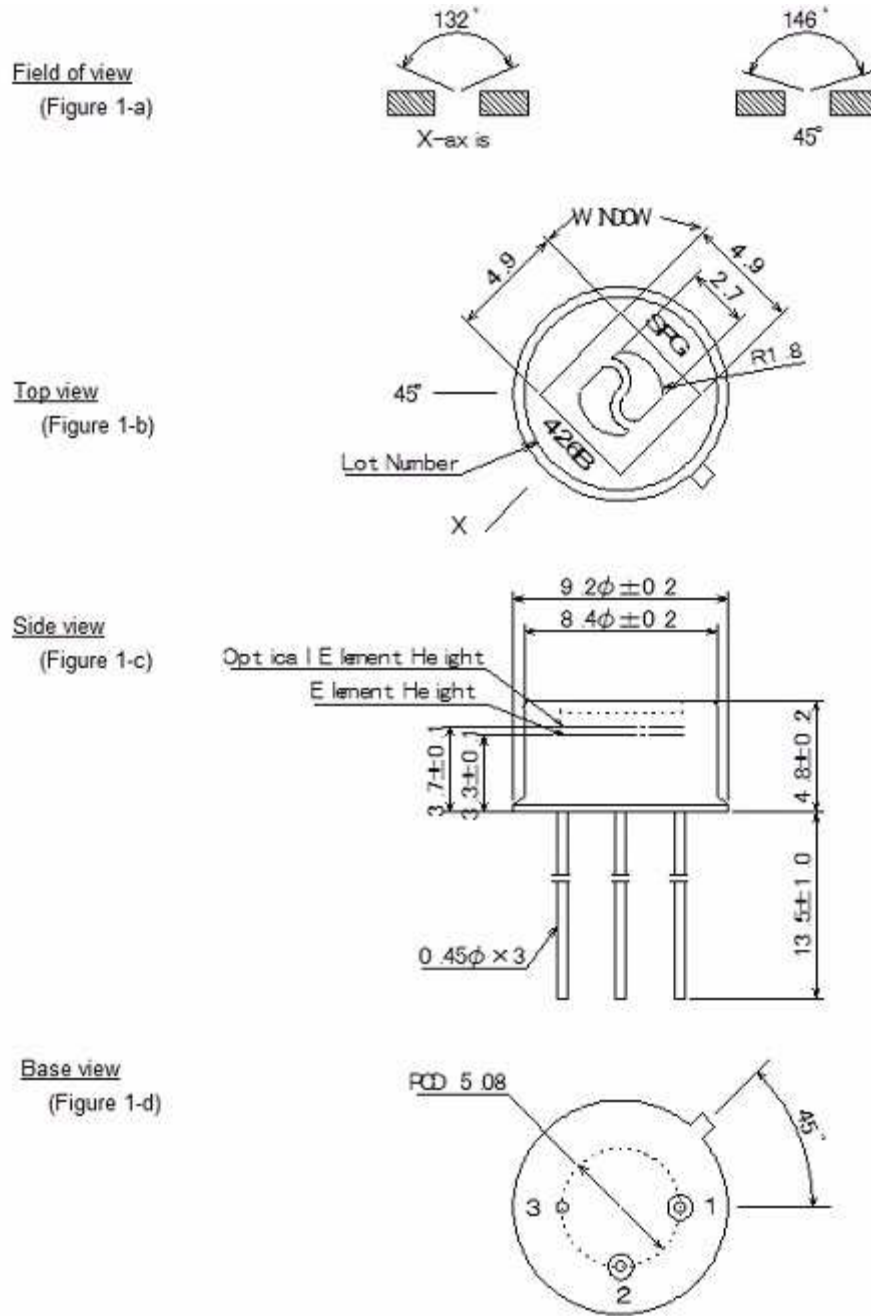


Figure 10. ZSFG469711 Mechanical Configuration

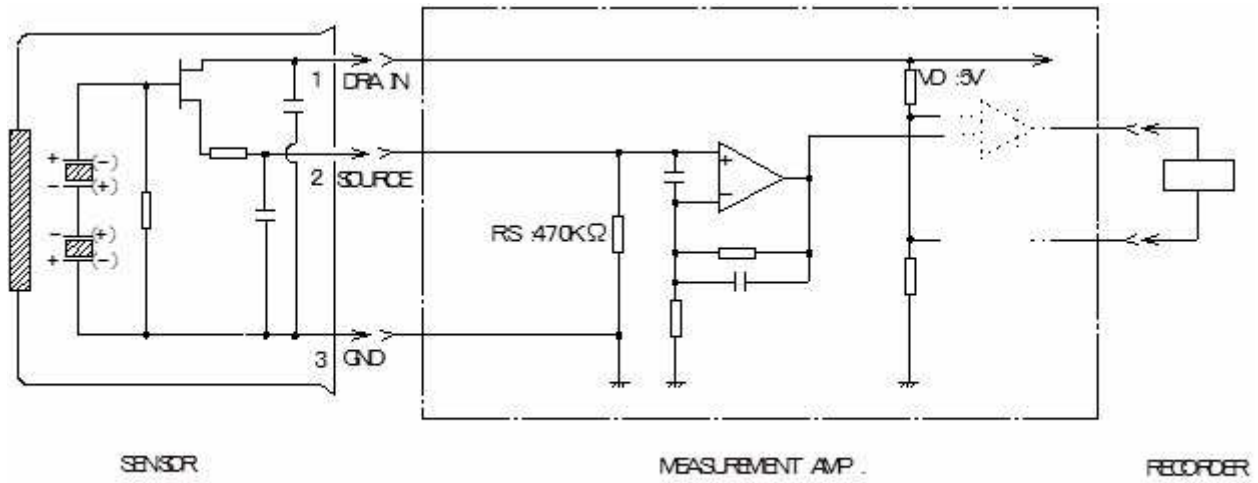

Measurement Amp.: Non-inverted type, gain 72.5 dB at 1 Hz, 0.4 to 2.7 Hz/−3 dB

Figure 11. ZSFG469711 Circuit Configuration