



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# MICRO Relays

RoHS

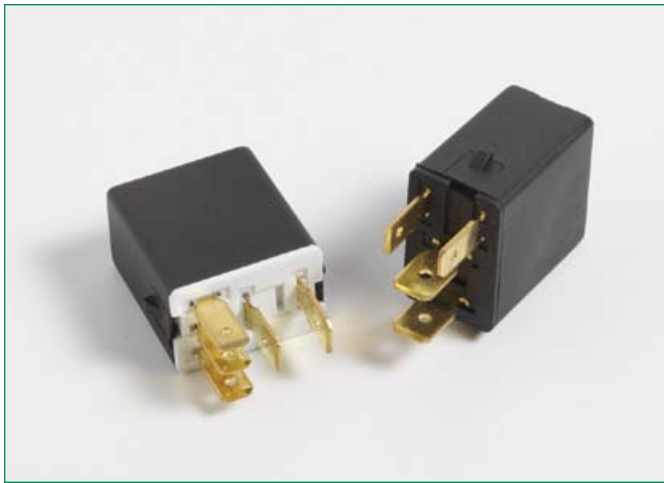

Remote control switches for automotive applications available for 12V and 24V rated circuits.

Relais für Anwendungen im Automobilbereich, erhältlich für 12V und 24V Bordnetze.

## Specifications

**Normally open relay :**

**Color Case:** Black  
**Color Base:** 12V Black / 24V White

**Change over relay:**

**Color Case:** Black  
**Color Base:** 12V Black / 24V White  
**Packaging:**

Series Serien	Pack Size
020406xxTXN	10
020406xxZ	200




HOMOLOGATION IN ACCORDANCE WITH:




REGULATION N.10 ECE-ONU/02




EUROPEAN DIRECTIVE DIR.95/54 CE



Normally Open (A)




Normally Open with Resistor (B)




Normally Open with Diode (C)


**Terminal 1 is positive.**



Change Over (A)



Change Over with Resistor (B)



Change Over with Diode (C)

**Terminal 1 is positive.**

### Normally open relay

Part Number Artikel-Nr.	Volt	Ampere	Feature Merkmal	Diagram Schema
02040601_	12V	25A	–	A
02040605_	12V	25A	Resistor	B
02040609_	12V	25A	Diode	C
02040602_	24V	10A	–	A
02040606_	24V	10A	Resistor	B
02040610_	24V	10A	Diode	C

### Change over relay

Part Number Artikel-Nr.	Volt	Ampere	Feature Merkmal	Diagram Schema
02040603_	12V	20/10A	–	A
02040607_	12V	20/10A	Resistor	B
02040611_	12V	20/10A	Diode	C
02040604_	24V	15/10A	–	A
02040608_	24V	15/10A	Resistor	B
02040612_	24V	15/10A	Diode	C