

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








TECHNICAL DATA SHEET

Rosenberger

RPC-2.92 ADAPTOR JACK - PLUG

02KR121-S0AS3

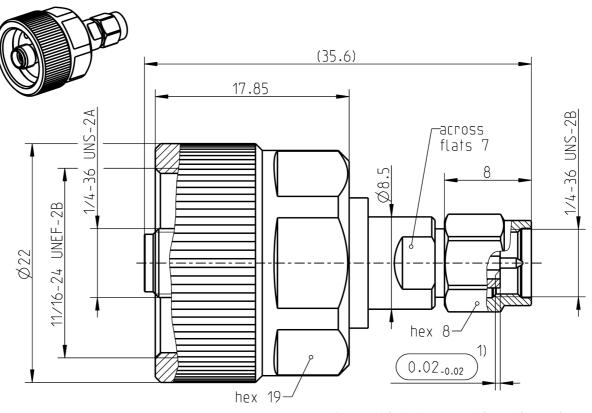

1) restricted connection dimension

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to Mechanically compatible with

IEC 61169-35 RPC-3.50 and SMA

Documents

N/A

Material and plating

Connector parts
Center contact
Outer contact
Coupling nut
Dielectric

Material

CuBe Stainless steel Stainless steel PEEK

Plating

Gold, min. 1.27 μ m, over chemical nickel Passivated Passivated

RF_35/12.04/3.0

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de Tel.: +49 8684 18-0 Fax: +49 8684 18-499 email: <u>info@rosenberger.de</u> Page

1/2

TECHNICAL DATA SHEET

Rosenberger

RPC-2.92 ADAPTOR JACK - PLUG

02KR121-S0AS3

Electrical data

Impedance 50 Ω

Frequency DC to 40 GHz

Return loss \geq 26 dB, DC to 26.5 GHz \geq 23 dB, 26.5 GHz to 40 GHz

Insertion loss $\leq 0.04 \text{ x} \sqrt{f(GHz)} dB$

 $\begin{array}{ll} \text{Insulation resistance} & \geq 5 \text{ G}\Omega \\ \text{Center contact resistance} & \leq 3.0 \text{ m}\Omega \\ \text{Outer contact resistance} & \leq 2.0 \text{ m}\Omega \\ \text{Test voltage} & 750 \text{ V rms} \\ \text{Working voltage} & 250 \text{ V rms} \\ \end{array}$

RF-leakage \geq 100 dB up to 1 GHz

Mechanical data

 $\begin{array}{ll} \mbox{Mating cycles} & \geq 500 \\ \mbox{Center contact captivation} & \geq 20 \ \mbox{N} \\ \mbox{Coupling test torque} & 1.70 \ \mbox{Nm} \\ \end{array}$

Recommended torque 0.80 Nm to 1.10 Nm

Recommended torque ruggedized nut 1.36 Nm

Environmental data

Temperature range -40°C to +85°C

Thermal shock MIL-STD-202, Method 107, Condition B
Corrosion MIL-STD-202, Method 101, Condition B
Vibration MIL-STD-202, Method 204, Condition D
Shock MIL-STD-202, Method 213, Condition I

Moisture resistance MIL-STD-202, Method 106

RoHS compliant

Tooling

N/A

Suitable cables

N/A

Weight

38.6 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date		Rev.	Engineering change number	Name	Date
Herbert Babinger	17.09.09	Martin Moder	04.12.15		c00	15-1421	Maik Knoll	04.12.15
Rosenberger Hochfrequenztechnik GmbH & Co. KG						el.: +49 8684 18-0		Page

Rosenberger Hochfrequenztechnik GmbH & Co. KC P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel.: +49 8684 18-0 Page
Fax: +49 8684 18-499
email: info@rosenberger.de 2 / 2