

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








Technical Data Sheet

Rosenberger

RPC-3.50

Calibration Kit

03S30R-MSOTS3

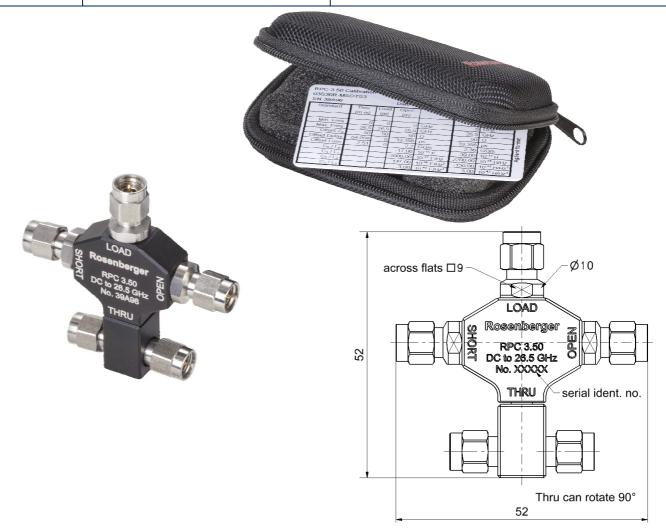

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to Mechanically compatible with

IEC 61169-23 RPC-2.92 and SMA

Contents and Documentation

This kit is delivered with

Standard Definitions Card
 Printed Standard Definitions that can be used on nearly all Vector Network Analyzers

 Al_2O_3

- Test Results Documentation
- Hard Shell Case

Material and plating

Connector parts
Center conductor
Outer conductor
Coupling nut
Body
Dielectric
Substrate

MaterialPlatingBeryllium copperGold, min. 1.27 μm, over nickelStainless steelPassivated

Stainless steel Passivated
Stainless steel Passivated
Aluminum Passivated
black anodized
PS

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel. : +49 8684 18-0 Email : info@rosenberger.de Page

1/3

Technical Data Sheet

Rosenberger

RPC-3.50

Calibration Kit

03S30R-MSOTS3

Electrical data

Frequency range DC to 26.5 GHz

Thru

Return loss \geq 34 dB, DC to 4 GHz \geq 32 dB, 4 GHz to 8 GHz

 \geq 30 dB, 8 GHz to 26.5 GHz

<u>Open</u>

Error from nominal phase¹ \leq 1.0°, DC to 4 GHz \leq 2.0°, 4 GHz to 8 GHz

≤ 3.0°, 8 GHz to 26.5 GHz

Short

Error from nominal phase² $\leq 1.0^{\circ}$, DC to 4 GHz

≤ 2.0°, 4 GHz to 8 GHz ≤ 3.0°, 8 GHz to 26.5 GHz

Load

Return loss \geq 40.0 dB, DC to 4 GHz

 \geq 35.0 dB, 4 GHz to 8 GHz \geq 30.0 dB, 8 GHz to 26.5 GHz

DC Resistance 50 $\Omega \pm 0.5 \Omega$ Power handling $\leq 0.5 \text{ W}$

Mechanical data

Mating cycles≥ 500Maximum torque1.70 NmRecommended torque0.90 Nm

Gauge 0.00 mm to 0.08 mm

General standard definitions

For proper operation the vector network analyzer (VNA) needs a model describing the electrical behaviour of this calibration standard. The different models, units, and terms used will depend on the VNA type and they will have to be entered into the VNA. All values are based on typical geometry and plating.

Thru

 $\begin{array}{lll} \mbox{Offset $Z_{\rm o}$ / Impedance / $Z_{\rm o}$} & 50 \ \Omega \\ \mbox{Offset Delay} & 84.058 \ ps \\ \mbox{Length (electrical) / Offset Length} & 25.20 \ mm \\ \mbox{Offset Loss} & 2.51 \ G\Omega/s \\ \mbox{Loss} & 0.0183 \ dB/\sqrt{\rm GHz} \\ \mbox{Line Loss @ 1GHz} & 0.0007 \ dB/mm \\ \end{array}$

<u>Open</u>

 $\begin{array}{ll} \mbox{Offset Z_{\circ} / Impedance / Z_{\circ}} & 50 \ \Omega \\ \mbox{Offset Delay} & 33.356 \ ps \\ \mbox{Length (electrical) / Offset Length} & 10.00 \ mm \\ \mbox{Offset Loss} & 2.20 \ G\Omega/s \\ \mbox{Loss} & 0.0127 \ dB/\sqrt{GHz} \end{array}$

Fringing Capacitances $C_0 = -17.000 \times 10^{-15} \, \text{F}$ / -17.000 fF

 $C_1 = -2000.0 \times 10^{-27} \text{ F/Hz}$ / -2.0000 fF /GHz $C_2 = 147.00 \times 10^{-36} \text{ F/Hz}^2$ / 0.1470 fF /GHz^2 $C_3 = -3.0000 \times 10^{-45} \text{ F/Hz}^3$ / $-0.0030 \text{ fF /GHz}^3$

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel.: +49 8684 18-0 Email: info@rosenberger.de Page

2/3

¹ The nominal phase is defined by the Offset Delay, the Offset Loss and the Fringing Capacitances

² The nominal phase is defined by the Offset Delay, the Offset Loss and the Short Inductance

Technical Data Sheet		Rosenberger		
RPC-3.50	Calibration Kit Plug	03S30R-MSOTS3		

	-	_	
J		u	ΙL

Loss $0.0127 \text{ dB}/\sqrt{\text{GHz}}$

Short Inductance $L_0 = -39.000 \times 10^{-12} \, H$ / -39.000 pH

 $L_1 = 2200.0 \times 10^{-24} \text{ H/Hz}$ / 2.2000 pH /GHz $L_2 = -150.00 \times 10^{-33} \text{ H/Hz}^2$ / -0.1500 pH /GHz²

 $_{-3} = 3.0000 \times 10^{-42} \text{ H/Hz}^3 / 0.0030 \text{ pH /GHz}^3$

Load

 $\begin{array}{ll} \mbox{Offset Z_{\circ} / Impedance / Z_{\circ}} & 50 \ \Omega \\ \mbox{Offset Delay} & 0.0000 \ ps \\ \mbox{Length (electrical) / Offset Length} & 0.000 \ mm \\ \mbox{Offset Loss} & 0.00 \ G\Omega/s \\ \mbox{Loss} & 0.0000 \ dB/\sqrt{GHz} \end{array}$

Environmental data

Operating temperature range³ +20 °C to +26 °C
Rated temperature range of use⁴ 0 °C to +50 °C
Storage temperature range -40 °C to +85 °C
RoHS compliant

Declaration of documentation

Standard delivery for this kit includes Test Results. The documentation issued reports which quantities were tested individually, traceable to national / international standards. Model based standard definitions of the calibration standards are reported in Agilent / Keysight, Rohde & Schwarz and Anritsu compatible VNA format.

Inspection interval

Recommendation 12 months

Packing

Standard 1 pce in bag Weight 38.3 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Marcel Panicke 07.01.16	Markus Müller	02.05.18	g00	18-0787	Marion Striegler	02.05.18

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel. : +49 8684 18-0 Email : info@rosenberger.de Page

3/3

³ Temperature range over which these specifications are valid.

⁴ This range is underneath and above the operating temperature range, within the calibration kit is fully functional and could be used without damage