



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

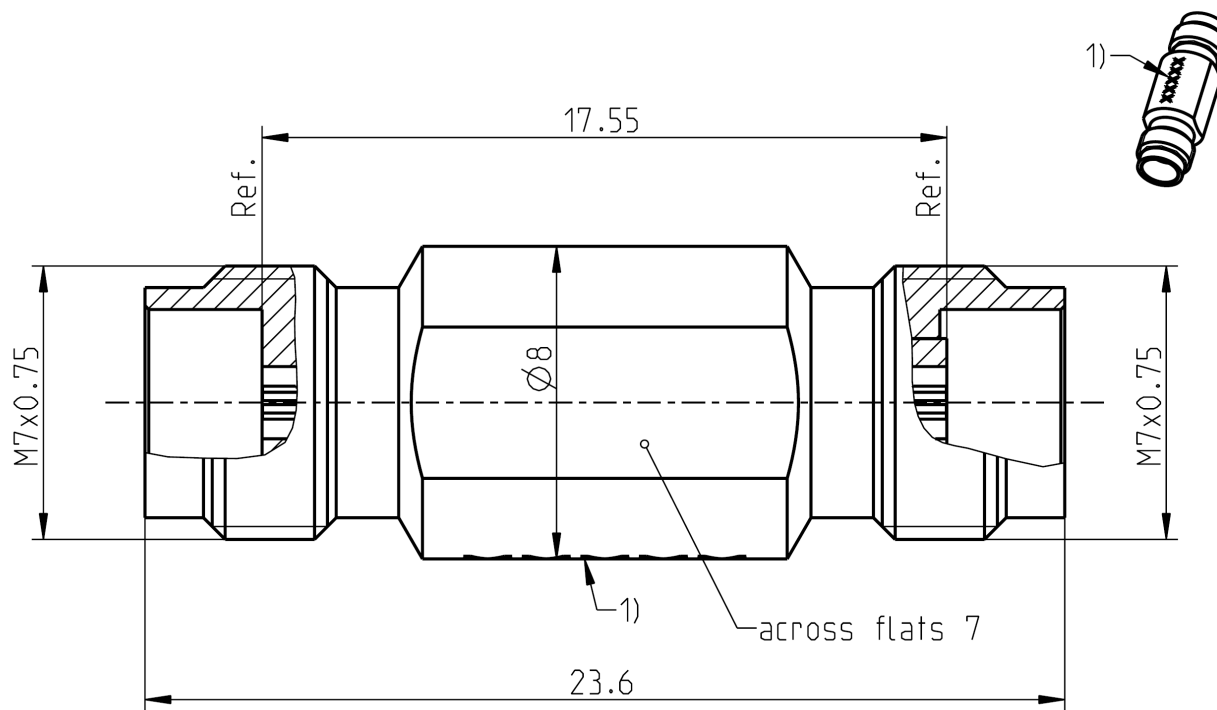
Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



RPC-1.85

ADAPTOR
JACK - JACK**08K121-K00S3**

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to
Mechanically compatible with

IEC 61169-32
RPC-2.40

Documents

N/A

Material and plating**Connector parts**

Center contact
Outer contact
Dielectric

Material

Beryllium copper
Stainless steel
PEEK

Plating

Gold, min. 1.27 µm, over chemical nickel
Passivated

TECHNICAL DATA SHEET

Rosenberger

RPC-1.85

ADAPTOR
JACK - JACK

08K121-K00S3

Electrical data

| | |
|---------------------------|------------------------------------|
| Impedance | 50 Ω |
| Frequency | DC to 70 GHz |
| Return loss | ≥ 17 dB, DC to 70 GHz |
| Insertion loss | ≤ 0.05 x $\sqrt{f(\text{GHz})}$ dB |
| Insulation resistance | ≥ 5 GΩ |
| Center contact resistance | ≤ 4.0 mΩ |
| Outer contact resistance | ≤ 2.5 mΩ |
| Test voltage | 500 V rms |
| Working voltage | 150 V rms |
| RF-leakage | ≥ 100 dB up to 1 GHz |

Mechanical data

| | |
|----------------------------|--------------------|
| Mating cycles | ≥ 500 |
| Center contact captivation | ≥ 20 N |
| Coupling test torque | 1.65 Nm |
| Recommended torque | 0.80 Nm to 1.10 Nm |

Environmental data

| | |
|---------------------|-------------------------------|
| Temperature range | -40°C to +85°C |
| Thermal shock | IEC 61169-1, Subclause 9.4.4 |
| Corrosion | IEC 61169-1, Subclause 9.4.6 |
| Vibration | IEC 61169-1, Subclause 9.3.3 |
| Shock | IEC 61169-1, Subclause 9.3.14 |
| Moisture resistance | IEC 61169-1, Subclause 9.4.3 |
| 2002/95/EC (RoHS) | compliant |

Tooling

N/A

Suitable cables

N/A

Packing

| | |
|----------|--------------|
| Standard | 1 pce in box |
| Weight | 5.4 g/pce |

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

| Draft | Date | Approved | Date | Rev. | Engineering change number | Name | Date |
|--|----------|------------------|----------|------|--|------------|---------------|
| Herbert Babinger | 25/08/04 | Roland Neuhauser | 29/08/12 | e00 | 12-0760 | Maik Knoll | 29/08/12 |
| Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de | | | | | Tel.: +49 8684 18-0 Fax: +49 8684 18-499 email: info@rosenberger.de | | Page 2 / 2 |