



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



0912-25

25 Watts, 50 Volts, Pulsed
Avionics 960 - 1215 MHz
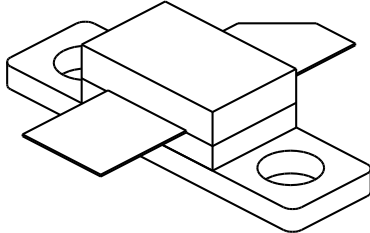
<p>GENERAL DESCRIPTION The 0912-25 is a COMMON BASE bipolar transistor. It is designed for pulsed systems in the frequency band 960-1215 MHz. The device has gold thin-film metallization for proven highest MTF. The transistor includes input prematch for broadband capability. Low thermal resistance package reduces junction temperature, extends life.</p>	<p>CASE OUTLINE 55CX, STYLE 1</p> 
<p>ABSOLUTE MAXIMUM RATINGS Maximum Power Dissipation @ 25°C² 125 Watts</p> <p>Maximum Voltage and Current BVces Collector to Base Voltage 60 Volts BVebo Emitter to Base Voltage 4.0 Volts Ic Collector Current 2.5 Amps</p> <p>Maximum Temperatures Storage Temperature - 65 to + 150°C Operating Junction Temperature + 200°C</p>	

ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout	Power Out	F = 960-1215 MHz	25			Watts
Pin	Power Input	Vcc = 50 Volts			3.5	Watts
Pg	Power Gain	PW = 10 μsec	8.5	10		dB
η_c	Collector Efficiency	DF = 1 %		45		%
VSWR	Load Mismatch Tolerance	F = 1090 MHz			10:1	
BVebo	Emitter to Base Breakdown	Ie = 25 mA	4.0			Volts
BVces	Collector to Emitter Breakdown	Ic = 75 mA	55			Volts
Cob	Capacitance Collector to Base	Vcb = 50 Volts		14	17	pF
hFE	DC - Current Gain	Ic = 300 mA, Vce = 5 V	10			
θ_{jc}^2	Thermal Resistance				1.4	°C/W

Note 1: At rated output power and pulse conditions.
2: At rated pulse conditions

Initial Issue June 1, 1994

GHZ TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHZ RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.




GHZ TECHNOLOGY
RF-MICROWAVE SILICON POWER TRANSISTORS

0912-25


WIDEBOARD CIRCUIT INPUT RETURN LOSS

Pin = 3.5 Watt Pk, Vcc = 50 Volts

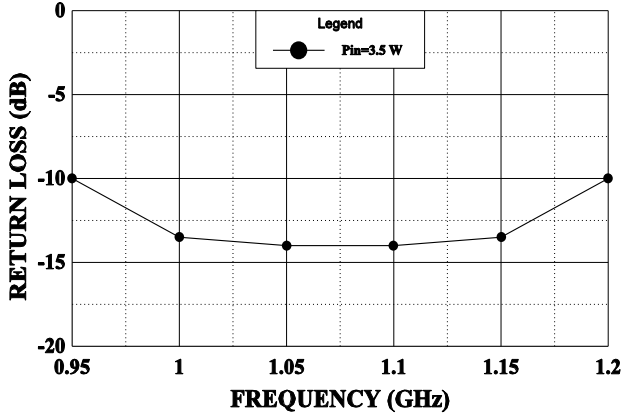


POWER OUTPUT vs POWER INPUT

Vcc = 50V, Frequency 1090 MHz

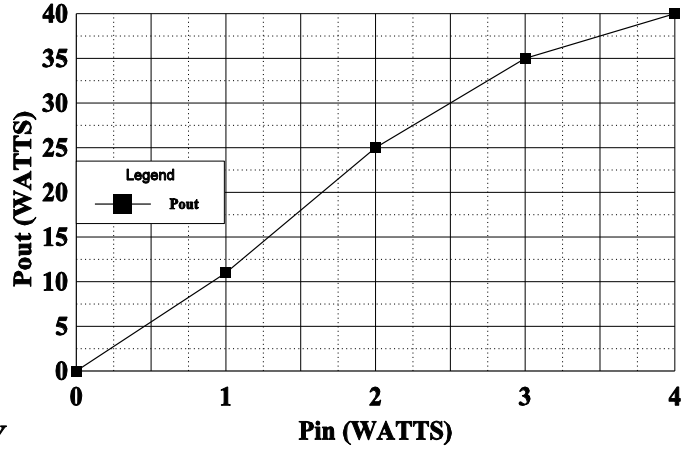


Pout VS FREQUENCY

Vcc=50V, Pin = 3.5 W

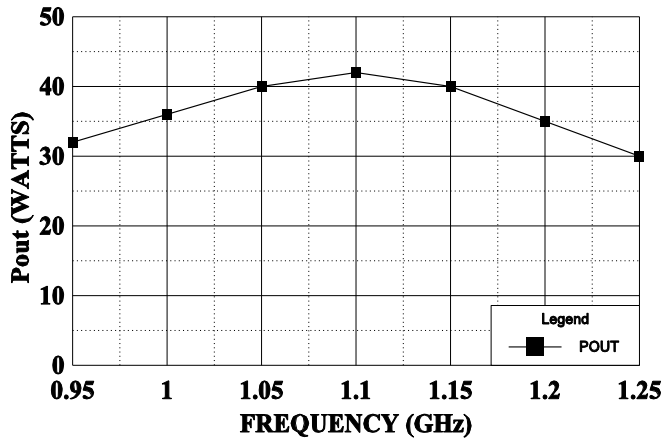


SERIES INPUT IMPEDANCE vs FREQUENCY


Vcc = 50 V, Pin = 1 W

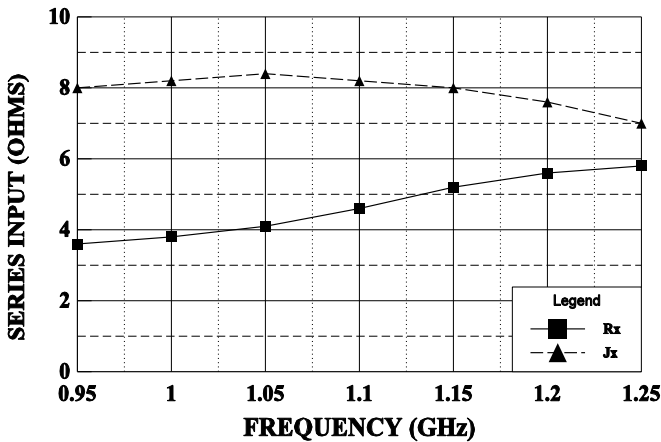

SERIES LOAD IMPEDANCE vs FREQUENCY

Vcc = 50 V, Pin = 3.5W

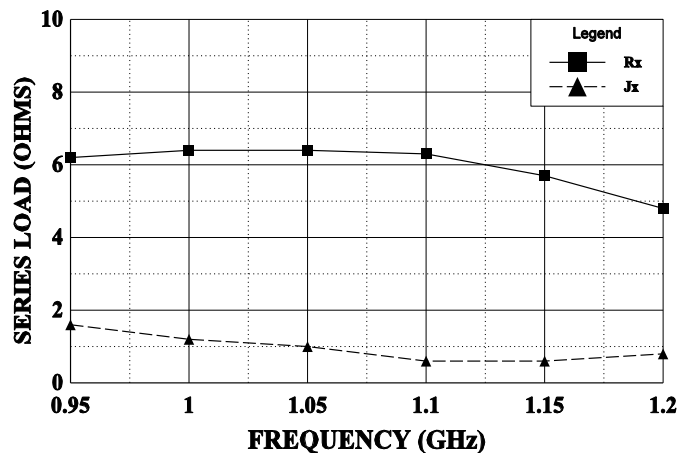

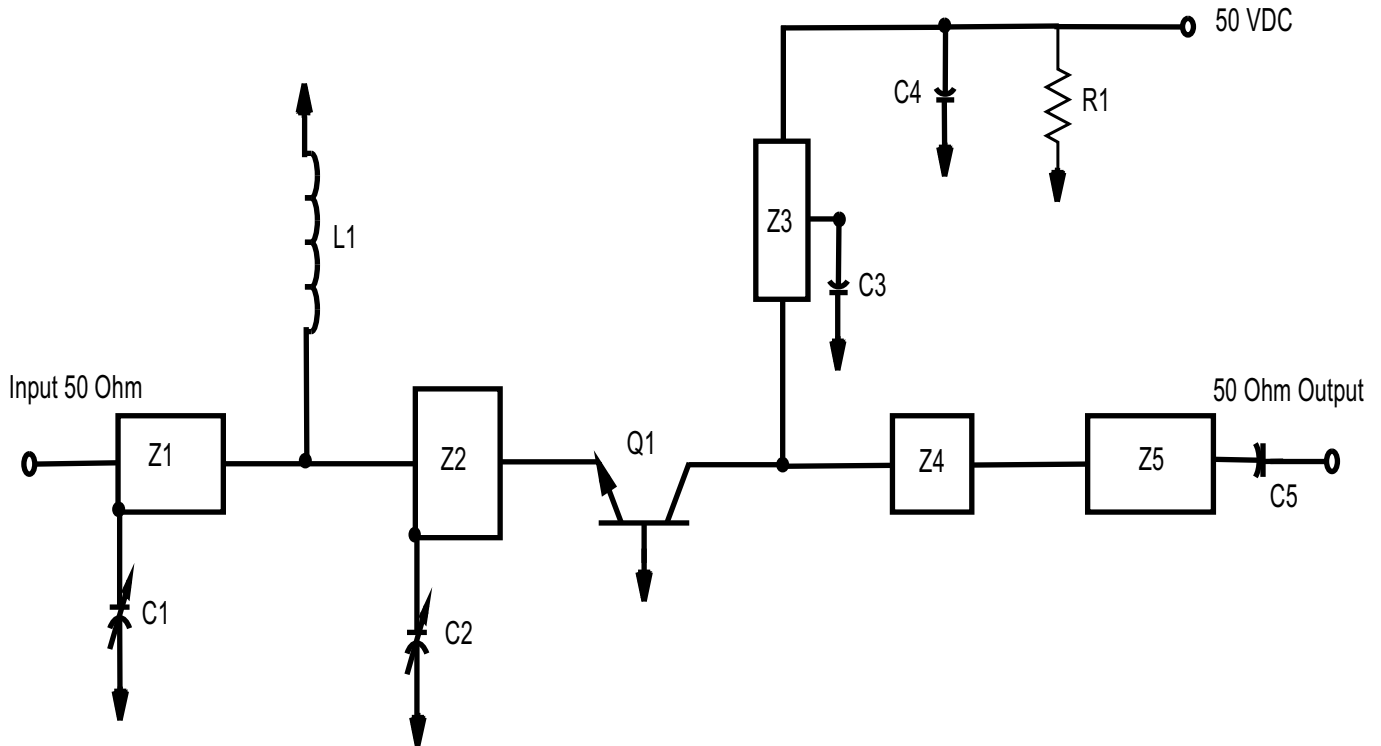

PC Board Material .010" Dielectric Teflon Fiberglass

Z1=50 , .112 , .27"w X .834"L

Z2=9 , .116 , .22"w X .811"L

Z3=50 , .7 , .27"w X 1.2"L

Move along Z3 for best tuning

Z4=10 , .04 , .2"w X .28"L

Z5=18.3 , .25 , .1"w X .18"L

C1, C2=Capacitor, .35-3.5 pF piston trimmer

C3, C5=Capacitor, 47 pF "B" (100mil) ATC

C4= Capacitor, 50 mf 75V electrolytic

L1=Inductor, #18 wire 1 1/2 turns 1/4" diameter

Q1=GHz 0912-25