

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



### Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







| Technical Data Sheet |         | Rosenberger  |  |  |
|----------------------|---------|--------------|--|--|
| RPC-2.40             | Adaptor | 09S121-S00S3 |  |  |

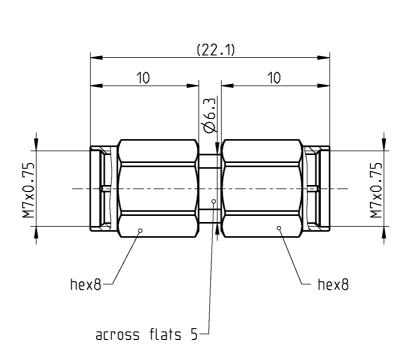

All dimensions are in mm; tolerances according to ISO 2768 m-H

#### Interface

According to Mechanically compatible with

IEC 61169-40 RPC-1.85

#### **Documents**

N/A

## Material and plating Connector parts

Connector parts
Center contact
Outer contact

Coupling Nut Dielectric

#### Material

CuBe Stainless steel Stainless steel

PEEK

#### **Plating**

Gold, min. 1.27  $\mu$ m, over chemical nickel Passivated

Passivated

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel.: +49 8684 18-0 Email: info@rosenberger.de Page

1/2

# Technical Data Sheet RPC-2.40 Adaptor plug - plug O9S121-S00S3

#### **Electrical data**

Impedance 50  $\Omega$ 

Frequency DC to 50 GHz

Return loss  $\geq$  17 dB, DC to 50 GHz Insertion loss  $\leq$  0.05 x  $\sqrt{f(GHz)}$  dB

 $\begin{array}{ll} \text{Insertion loss} & \leq 0.05 \text{ x } \sqrt{\text{f(GHz)}} \text{ dB} \\ \text{Insulation resistance} & \geq 5 \text{ } G\Omega \end{array}$ 

Test voltage (at sea level)

Working voltage (at sea level)

500 V rms

150 V rms

RF-leakage  $\geq$  100 dB up to 1 GHz

#### Mechanical data

Mating cycles $\geq 500$ Center contact captivation $\geq 20 \text{ N}$ Coupling test torque1.65 Nm

Recommended torque 0.80 Nm to 1.10 Nm

#### **Environmental data**

Temperature range -40°C to +85°C

Thermal shock IEC 61169-1, Subclause 9.4.4 Corrosion IEC 61169-1, Subclause 9.4.6 Vibration IEC 61169-1, Subclause 9.3.3 Shock IEC 61169-1, Subclause 9.3.14

Moisture resistance IEC 61169-1, Subclause 9.4.3

RoHS compliant

Tooling

N/A

Suitable cables
N/A

Weight 5.3 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

| Draft            | Date     | Approved  | Date     | Rev. | Engineering change number | Name  | Date     |
|------------------|----------|-----------|----------|------|---------------------------|-------|----------|
| Herbert Babinger | 07.09.04 | F. Reiner | 20.06.18 | b01  | 18-1026                   | M.Ruf | 20.06.18 |

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel. : +49 8684 18-0 Email : info@rosenberger.de Page 2/2