



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Surface Mount PTC

OZCG Series

HF **Pb** OZCG Series -1812 Chip **RoHS 6 Compliant & Halogen-Free**

Application

All high-density boards

Product Features

1812 Chip Size , Fast Trip Time, Low DCR Resistance

Operating (Hold Current) Range

100mA - 3A

Maximum Voltage

6 - 60V (per table)

Temperature Range

-40°C to 85°C

Agency Approval

TUV (Std. EN60738-1-1, Cert. R50102117 & R50102187)


UL Component (Std. UL1434, File E305051)

UL Conditions of Acceptability:

1. These devices have been investigated for use in safety circuits and are suitable as a limiting device.
2. These devices have been calibrated to limit the current to 8 amps within 5 seconds, per ANSI/NFPA 70, "National Electrical Code".

LEAD FREE = **Pb**

HALOGEN FREE = **HF**

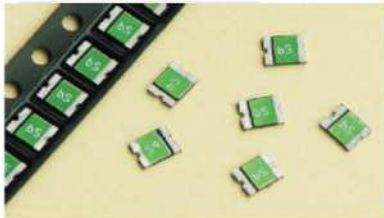

Electrical Characteristics (23°C)

	Part Number	Hold Current IH, A	Trip Current IT, A	Rated Voltage Vmax, Vdc	Maximum Current Imax, A	Typical Power Pd, W	Max Time to Trip		Resistance Tolerance		Agency Approvals	
							Current A	Time Sec	Rmin Ohms	R1max Ohms	UL	TUV
A	OZCG0010FF2C	0.10	0.30	60	100	0.8	8.0	0.020	1.600	15.00	Y	Y
B	OZCG0014FF2C	0.14	0.30	60	10	0.8	8.0	0.008	1.200	6.500	Y	Y
C	OZCG0020FF2C	0.20	0.40	30	10	0.8	8.0	0.020	0.800	5.000	Y	Y
	OZCG0020AF2C	0.20	0.40	60	40	0.8	8.0	0.020	0.800	5.000	Y	Y
D	OZCG0030FF2C	0.30	0.60	30	40	0.8	8.0	0.100	0.200	1.750	Y	Y
E	OZCG0035FF2C	0.35	0.70	16	40	0.8	8.0	0.100	0.320	1.500	Y	Y
	OZCG0035AF2C	0.35	0.70	30	40	0.8	8.0	0.100	0.320	1.500	Y	Y
F	OZCG0050FF2C	0.50	1.00	16	100	0.8	8.0	0.150	0.150	1.000	Y	Y
	OZCG0050AF2C	0.50	1.00	30	100	0.8	8.0	0.150	0.150	1.000	Y	Y
G	OZCG0075FF2C	0.75	1.50	16	100	0.8	8.0	0.200	0.110	0.450	Y	Y
	OZCG0075AF2B	0.75	1.50	24	40	1.0	8.0	0.200	0.110	0.290	Y	Y
H	OZCG0075BF2B	0.75	1.50	33	40	1.0	8.0	0.200	0.110	0.400	Y	Y
	OZCG0110FF2C	1.10	2.20	8	100	0.8	8.0	0.300	0.040	0.210	Y	Y
I	OZCG0110AF2C	1.10	2.20	16	100	0.8	8.0	0.500	0.040	0.180	Y	Y
	OZCG0110BF2B	1.10	2.20	24	100	1.0	8.0	0.500	0.060	0.200	Y	Y
J	OZCG0125FF2C	1.25	2.50	6	100	0.8	8.0	0.400	0.050	0.140	Y	Y
	OZCG0125AF2B	1.25	2.50	16	100	0.8	8.0	0.400	0.050	0.140	Y	Y
K	OZCG0150FF2C	1.50	3.00	8	100	0.8	8.0	0.500	0.040	0.110	Y	Y
	OZCG0150AF2C	1.50	3.00	12	100	1.0	8.0	0.500	0.040	0.110	Y	Y
L	OZCG0150BF2C	1.50	3.00	24	100	1.0	8.0	1.500	0.040	0.120	Y	Y
	OZCG0160FF2C	1.60	3.20	8	100	0.8	8.0	0.500	0.030	0.100	Y	Y
M	OZCG0160AF2C	1.60	3.20	12	100	1.0	8.0	1.000	0.030	0.100	Y	Y
	OZCG0160BF2C	1.60	3.20	16	100	1.0	8.0	1.000	0.030	0.100	Y	Y
N	OZCG0200FF2C	2.00	3.50	8	100	1.0	8.0	2.000	0.020	0.070	Y	Y
	OZCG0200AF2B	2.00	3.50	16	100	1.0	8.0	5.000	0.020	0.085	Y	Y
O	OZCG0260FF2C	2.60	5.00	8	100	1.0	8.0	2.500	0.015	0.047	Y	Y
	OZCG0260AF2B	2.60	5.00	13.2	100	1.3	8.0	5.000	0.015	0.050	Y	Y
P	OZCG0260BF2B	2.60	5.00	16	100	1.3	8.0	5.000	0.015	0.050	Y	Y
	OZCG0300FF2B	3.00	5.00	6	100	1.0	8.0	4.000	0.012	0.040	Y	Y

NEW Ratings

NEW Ratings

- IH Hold Current-maximum current at which the device will not trip in still air at 23°C.
- IT Trip current-minimum current at which the device will always trip in still air at 23°C.
- Imax Maximum fault current device can withstand without damage at rated voltage (Vmax).
- Vmax Maximum voltage device can withstand without damage at its rated current.
- Pd Typical power dissipated by device when in tripped state in 23°C still air environment.
- Rmin Minimum device resistance at 23°C.
- R1max Maximum device resistance at 23°C, 1 hour after initial device trip, or after being soldered to PCB in end application.

Specifications subject to change without notice



Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
techhelp@belf.com
belfuse.com

Surface Mount PTC

OZCG Series

HF **Pb** OZCG Series -1812 Chip **RoHS 6 Compliant & Halogen-Free**

PTC's – Basic Theory of Operation / "Tripped" Resistance Explanation

Fundamentally, a Bel PTC consists of a block of polymeric material containing conductive filler and bonded between two conductive, planar terminations.

At currents below the device I_{HOLD} rating, AND at temperatures below 100C, the PTC maintains a resistance value below its R₁ MAX rating.

As the device's temperature approaches 130C, either due to an increase in ambient temperature or a current exceeding its I_{TRIP} rating, volumetric expansion of the filled polymer breaks apart the majority of conductive pathways across the terminals created by chain contact of adjacent filler particles or device resistance increases sharply by several orders of magnitude.

At the much higher "Tripped" resistance, there is just enough leakage current to allow internal heating to "hold" the device in its tripped state (around 125C) until power is interrupted. Once power is removed, the PTC's core cools and contracts allowing conductive chains to reform and return the device to its low resistance state.

The catalog data for each device specifies a "Typical Power" value. This is the power required to exactly match the heat lost by the tripped device to its ambient surroundings at 23C. By Ohm's Law, power can be stated as: $W = E^2/R$. Thus the approximate resistance of a "Tripped" PTC can be determined by: $R = E^2/W$, where "E" is the voltage appearing across the PTC (usually the supply's open circuit voltage), and "W" is the Typical Power value for the particular PTC. Since the PPTC acts to maintain a constant internal temperature, its apparent resistance will change based upon applied voltage and, to a lesser degree, ambient conditions. Consider the following example....

A PTC with a Typical Power of 1 watt protecting a circuit using a 60V supply will demonstrate an apparent, tripped resistance "R" of:


$$R = 60^2/1 = 3,600 \text{ ohms}$$

This same tripped device when used to protect a 12V circuit would now present an apparent resistance of:

$$R = 12^2/1 = 144 \text{ ohms}$$

The value for Typical Power is "typical" because any physical factors that affect heat loss (such as ambient temperature or air convection) will somewhat alter the level of power that the PTC needs to maintain its internal temperature. In short, PTCs do not exhibit a constant, quantifiable tripped resistance value.

Type Time - To - Trip at 23°C

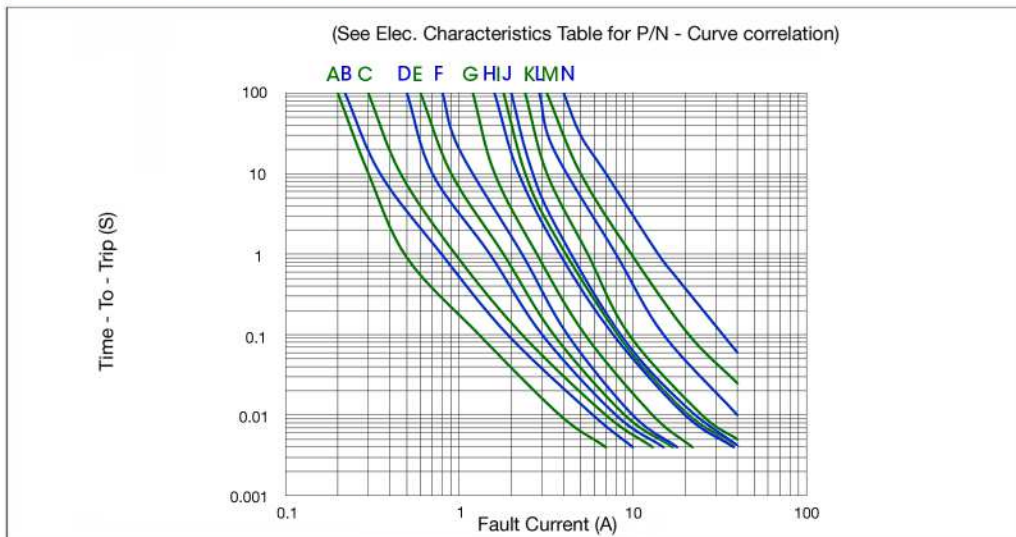

Specifications subject to change without notice



Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
techhelp@belf.com
belfuse.com


Surface Mount PTC

OZCG Series

HF (Pb) OZCG Series -1812 Chip

RoHS 6 Compliant & Halogen-Free

Mechanical Dimensions and Marking




All dimensions in mm.

Part Number	Dimensions				Marking Code	
	C		D		"b", IH code.	D 20
	Min	Max	Min	Max		
OZCG0010FF2C	0.60	0.90	0.30	0.95	0010	
OZCG0014FF2C	0.60	0.90	0.30	0.95	0014	
OZCG0020FF2C	0.60	0.90	0.30	0.95	0020	
OZCG0020AF2C	0.60	0.90	0.30	0.95		020 60
OZCG0030FF2C	0.40	0.70	0.30	0.95	0030	
OZCG0035FF2C	0.40	0.70	0.30	0.95	0035	
OZCG0035AF2C	0.40	0.70	0.30	0.95		035 30
OZCG0050FF2C	0.35	0.65	0.30	0.95	0050	
OZCG0050AF2C	0.45	0.75	0.30	0.95		050 30
OZCG0075FF2C	0.35	0.65	0.30	0.95	0075	
OZCG0075AF2B	0.80	1.55	0.25	0.95		075 24
OZCG0075BF2B	0.80	1.55	0.25	0.95		075 39
OZCG0110FF2C	0.25	0.55	0.30	0.95	0110	
OZCG0110AF2C	0.25	0.90	0.30	0.95		110 16
OZCG0110BF2B	0.80	1.30	0.25	0.95		110 24
OZCG0110CF2B	0.80	1.30	0.25	0.95		110 39
OZCG0125FF2C	0.25	0.55	0.30	0.95	0125	
OZCG0125AF2B	0.50	1.00	0.30	0.95		125 16
OZCG0150FF2C	0.25	0.55	0.30	0.95	0150	
OZCG0150AF2C	0.60	1.10	0.25	0.95		150 12
OZCG0150BF2C	0.60	1.55	0.25	0.95		150 24
OZCG0160FF2C	0.25	0.90	0.30	0.95	0160	
OZCG0160AF2C	0.60	1.35	0.25	0.95		160 12
OZCG0160BF2C	0.60	1.35	0.25	0.95		160 16
OZCG0200FF2C	0.55	1.20	0.25	0.95		200
OZCG0200AF2B	0.60	1.55	0.25	0.95		200 16
OZCG0260FF2C	0.55	1.20	0.25	0.95	0260	
OZCG0260AF2B	0.80	1.55	0.25	0.95		260 13
OZCG0260BF2B	0.80	1.55	0.25	0.95		260 16
OZCG0300FF2B	0.80	1.55	0.25	0.95	0300	

Pad Layout

The dimensions in the table below provide the recommended pad layout.




P		S		W	
Nominal	Nominal	Nominal	Nominal	Nominal	Nominal
mm	Inch	mm	Inch	mm	Inch
3.45	0.136	1.78	0.070	3.50	0.138

Termination Pad Materials

Matte Tin - Plated Copper

Thermal Derating Curve

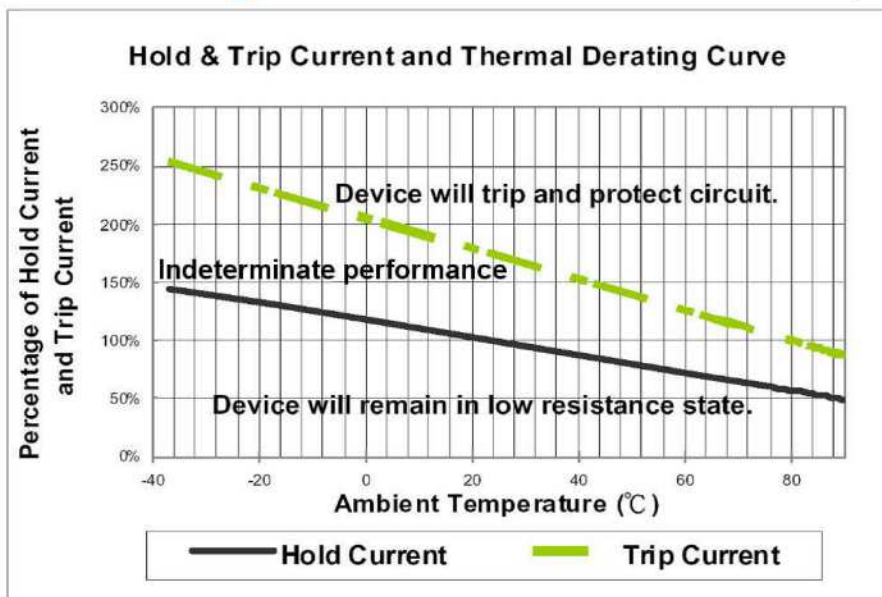

Cautionary Notes

1. Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
2. These Polymer PTC (PPTC) devices are intended for protection against occasional overcurrent/ overtemperature fault conditions and may not be suitable for use in applications where repeated and/or prolonged fault conditions are anticipated.
3. Avoid contact of PTC device with chemical solvent. Prolonged contact may adversely impact the PTC performance.
4. These PTC devices may not be suitable for use in circuits with a large inductance, as the PTC trip can generate circuit voltage spikes above the PTC rated voltage.
5. These devices are intended for use in DC voltage applications only. Use in AC voltage applications should be first discussed with Bel Fuse engineering.
6. Not recommended for use on potted or conformal coated PCB's. Restriction of free air flow could affect electrical performance and/or result in device failure. Consult Bel Fuse engineering.
7. In the "Indeterminate Performance / grey zone", tripping may occur but cannot be relied upon. For special circumstances considering use within this region, consult Bel Fuse Engineering.
8. MSL : 2a (According to IPC J-Std-020).

Specifications subject to change without notice



Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
techhelp@belf.com
belfuse.com


Surface Mount PTC

OZCG Series

HF **Pb** OZCG Series -1812 Chip RoHS 6 Compliant & Halogen-Free

Solder Reflow and Rework Recommendations

Profile Feature	Pb-Free Assembly
Average Ramp-Up Rate (T _{smax} to T _p)	3°C/second max
Preheat :	
Temperature Min (T _{smin})	150°C
Temperature Max (T _{smax})	200°C
Time (t _{smin} to t _{smax})	60-180 seconds
Time maintained above:	
Temperature(T _L)	217°C
Time (t _i)	60-150 seconds
Peak/Classification Temperature(T _p) :	260°C
Time within 5°C of actual Peak :	
Temperature (t _p)	20-40 seconds
Ramp-Down Rate :	6°C/second max.
Time 25°C to Peak Temperature :	8 minutes max

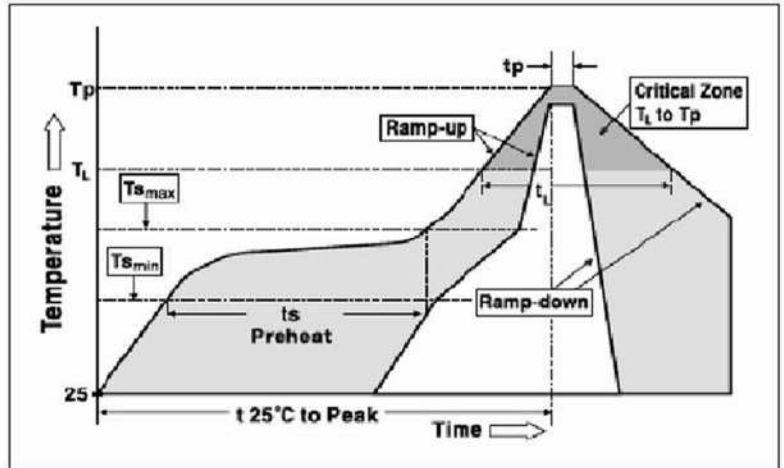

Solder Reflow

Due to "lead free / RoHS 6" construction of these PTC devices, the required Temperature and Dwell Time in the "Soldering" zone of the reflow profile are greater than those used for non-RoHS devices.

1. Recommended reflow methods ; IR, vapor phase oven, hot air oven.
2. Not Recommended For Wave Solder / Direct Immersion.
3. Recommended paste thickness range – 0.20 – 0.25mm.
4. Devices are compatible with standard industry cleaning solvents and methods.
5. MSL : 2a (According to IPC J-Std-020).

Caution

If reflow temperature / dwell times exceed the recommended profile, the electrical performance of the PTC may be affected.


Rework : MIL-STD-202G Method 210F, Test Condition A.

Standard Packaging

Part Number	Tape/Reel Qty
0ZCG0010FF2C Thru	2,000
0ZCG0075FF2C	
0ZCG0075AF2B	1,500
0ZCG0075BF2B	
0ZCG0110FF2C	2,000
0ZCG0110AF2C	
0ZCG0110BF2B	1,500
0ZCG0110CF2B	
0ZCG0125FF2C	2,000
0ZCG0125AF2B	1,500
0ZCG0150FF2C	
Thru	2,000
0ZCG0200FF2C	
0ZCG0200AF2B	1,500
0ZCG0260FF2C	2,000
0ZCG0260AF2B	
Thru	1,500
0ZCG0300FF2B	

2000 or 1500 fuses in 7 inches dia. Reel, 8mm wide tape, 4mm pitch, per EIA-481(equivalent IEC-286 part 3).

P/N Explanation and Ordering Information

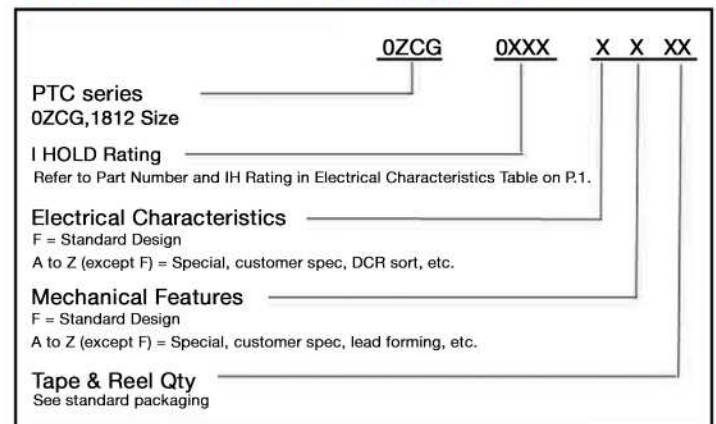

Specifications subject to change without notice



Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
techhelp@belf.com
belfuse.com