



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




5

4

3

2

1

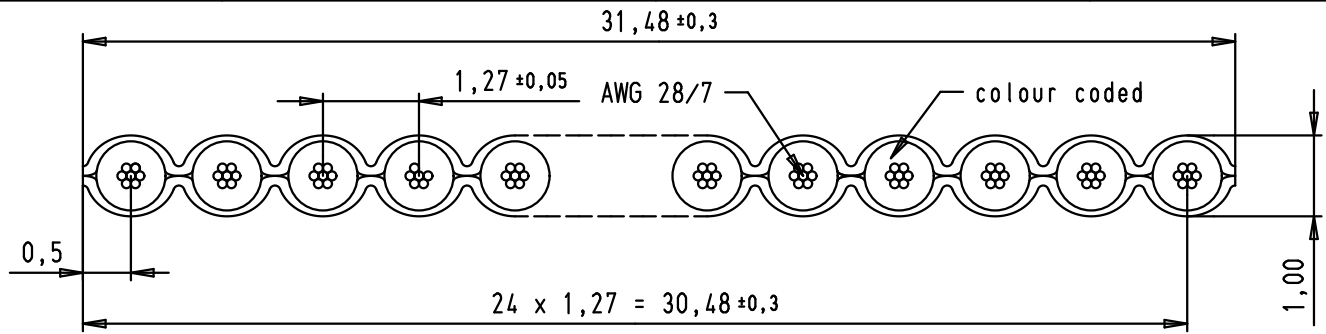

D

C



B

A

Wire \_\_\_\_\_ Cu tinned  
 Gauge \_\_\_\_\_ AWG 28/7  
 Voltage rating \_\_\_\_\_ 300 Vr.m.s  
 Current (Max) \_\_\_\_\_ 2,1A  
 Conductor resistance \_\_\_\_\_ 221 mΩ/m  
 Capacity unbalanced \_\_\_\_\_ 42,7 pF/m  
 Impedance unbalanced \_\_\_\_\_ 105 Ω  
 Inductance unbalanced \_\_\_\_\_ 0,68 μH/m  
 Signal delay \_\_\_\_\_ 4,9 ns/m  
 Insulation material \_\_\_\_\_ PVC  
 Temperature rating \_\_\_\_\_ -20°C (operating) to 105°C  
 \_\_\_\_\_ -30°C (static)  
 Flammability rating \_\_\_\_\_ UL: VW1  
 Insulation resistance \_\_\_\_\_ 100 MΩ/km  
 Approval \_\_\_\_\_ UL AWM style 2651

Colour code sequence (in 10 steps):

- brown
- red
- orange
- yellow
- green
- blue
- violet
- grey
- white
- black

				Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 18 Flat cable	Maßstab/ Scale	
			Detail.	20/10/05	JMDR		25 poles, length per reel: 30,48 m colour coded, UL 20130, IEC 918	10:1	
			Insp.						
EC01446	12/02/10	SC	Stand.						
							TB 09 18 025 7005	Blatt/ Page	
33990	14/05/07	PK	HARTING EURL F-95972 Paris					Sub.	1/1
33246	20/10/05	JMDR							
Mod.	Dot.	Name							