



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

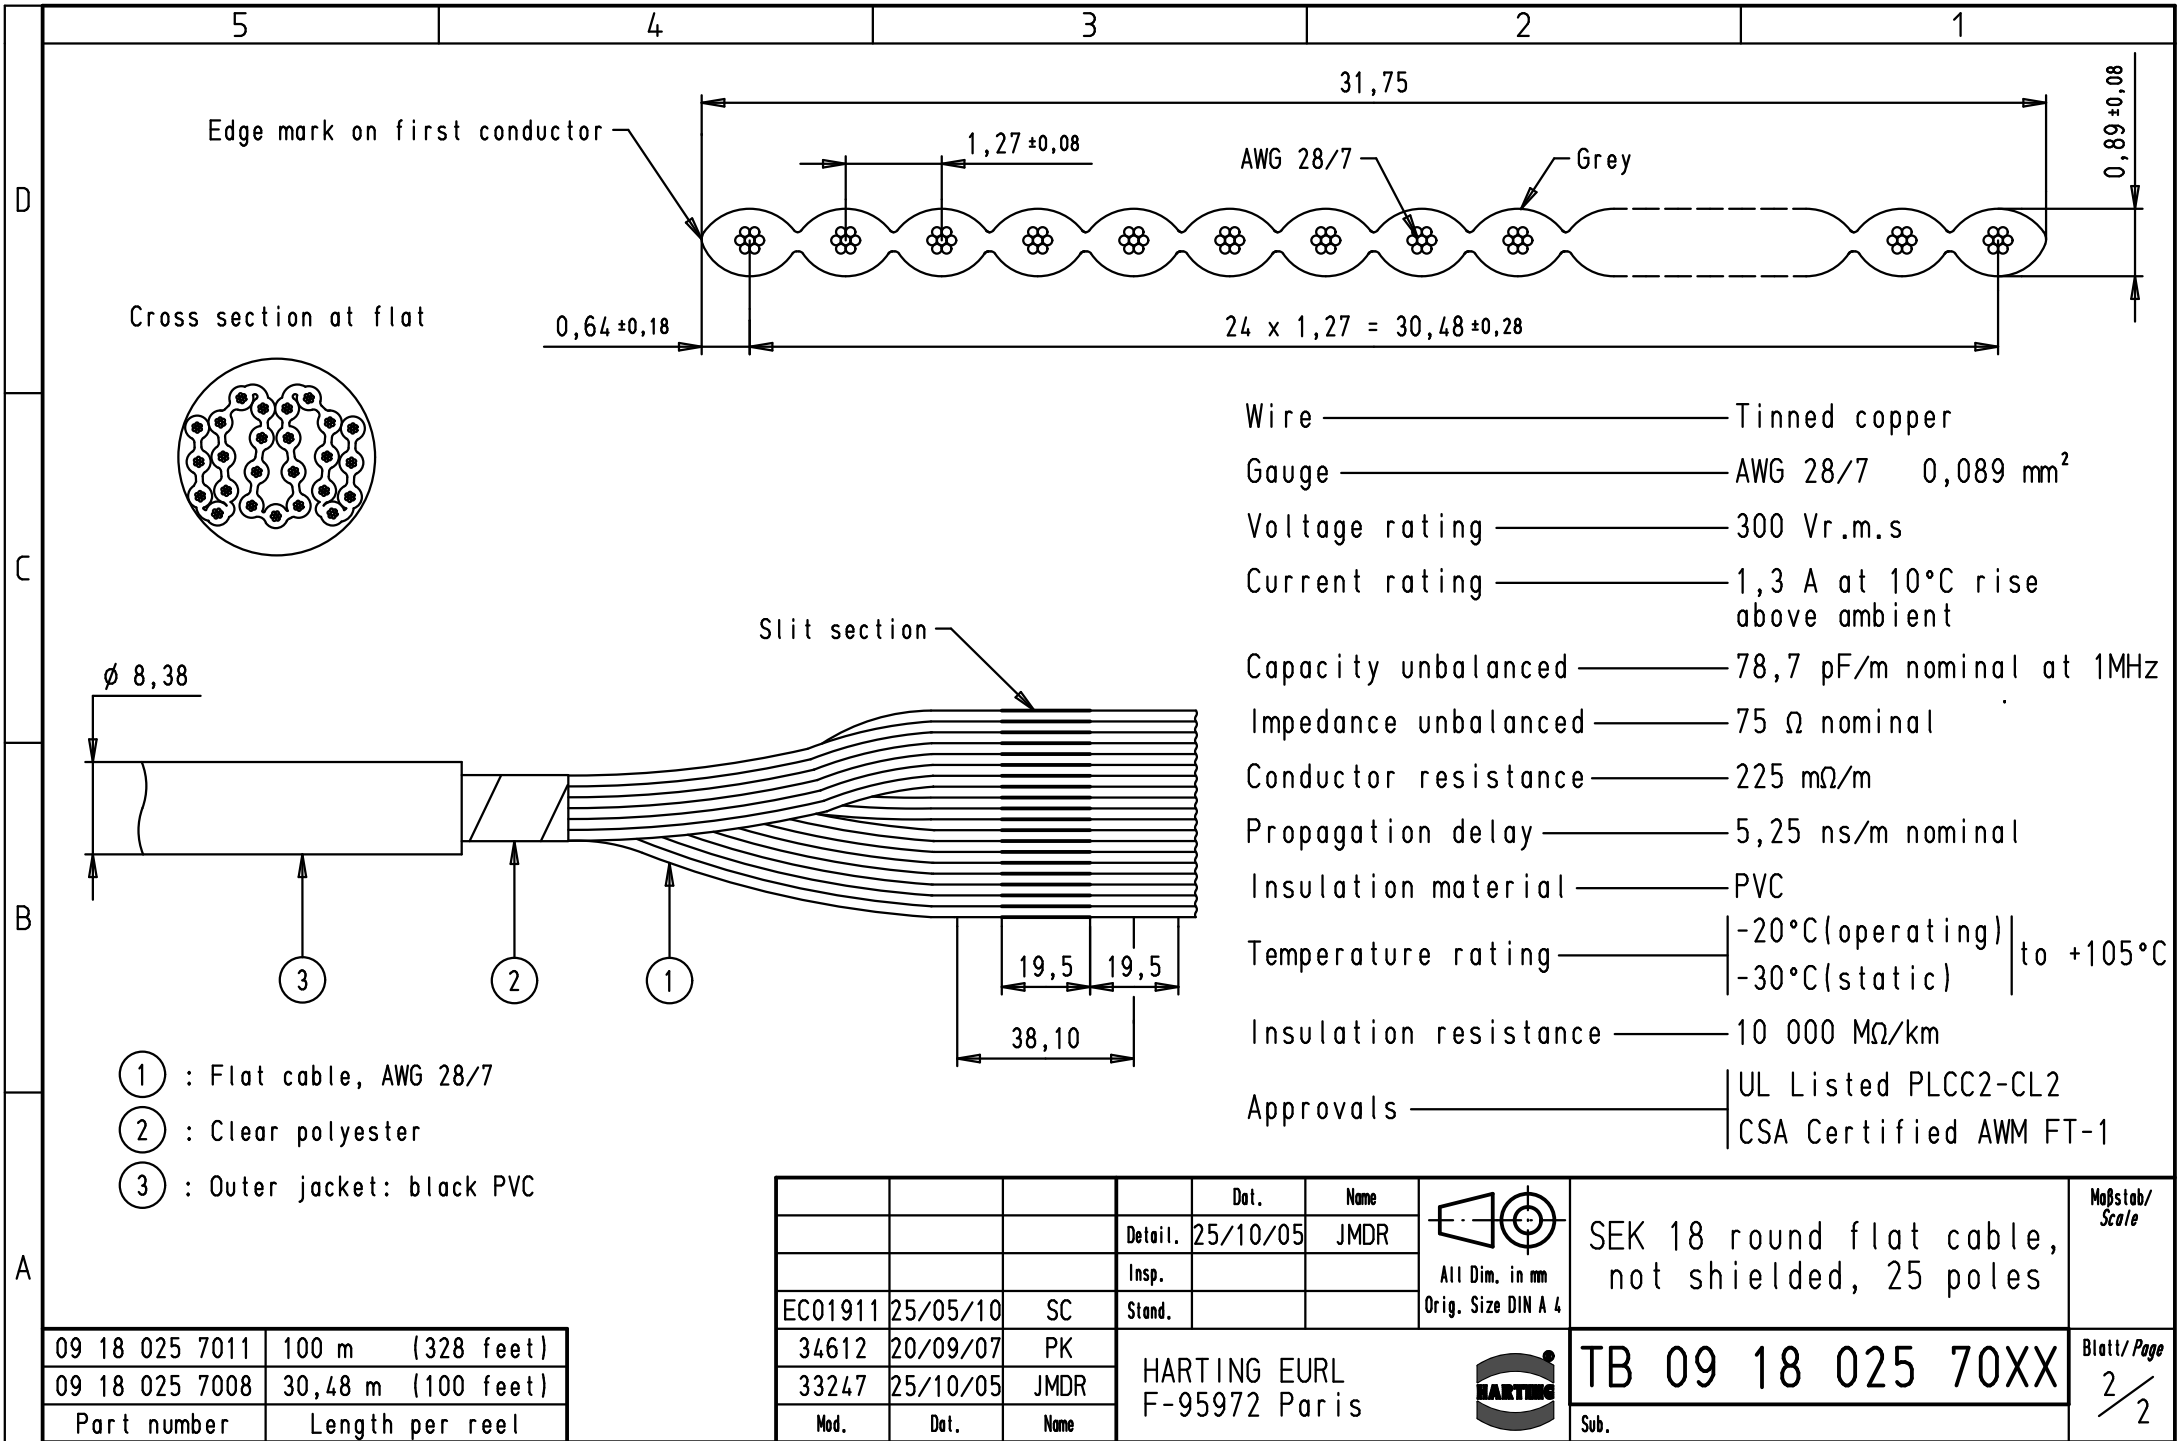



Wire ————— Tinned copper
 Gauge ————— AWG 28/7 0,089 mm²
 Voltage rating ————— 300 Vr.m.s
 Current rating ————— 1,3 A at 10°C rise above ambient
 Capacity unbalanced ————— 78,7 pF/m nominal at 1MHz
 Impedance unbalanced ————— 75 Ω nominal
 Conductor resistance ————— 225 mΩ/m
 Propagation delay ————— 5,25 ns/m nominal
 Insulation material ————— PVC
 Temperature rating ————— $\left. \begin{array}{l} -20^{\circ}\text{C (operating)} \\ -30^{\circ}\text{C (static)} \end{array} \right\} \text{to } +105^{\circ}\text{C}$
 Insulation resistance ————— 10 000 MΩ/km
 Approvals ————— $\left. \begin{array}{l} \text{UL Listed PLCC2-CL2} \\ \text{CSA Certified AWM FT-1} \end{array} \right\}$

- ① : Flat cable, AWG 28/7
- ② : Clear polyester
- ③ : Outer jacket: black PVC

				Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 18 round flat cable, not shielded, 25 poles	Maßstab/ Scale
			Detail.	25/10/05	JMDR			
			Insp.					
EC01911	25/05/10	SC	Stand.				TB 09 18 025 70XX	Blatt/ Page 2 / 2
34612	20/09/07	PK						
33247	25/10/05	JMDR						
09 18 025 7011	100 m (328 feet)					HARTING EURL F-95972 Paris	Sub.	
09 18 025 7008	30,48 m (100 feet)							
Part number	Length per reel			Mod.	Dot.	Name		