



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



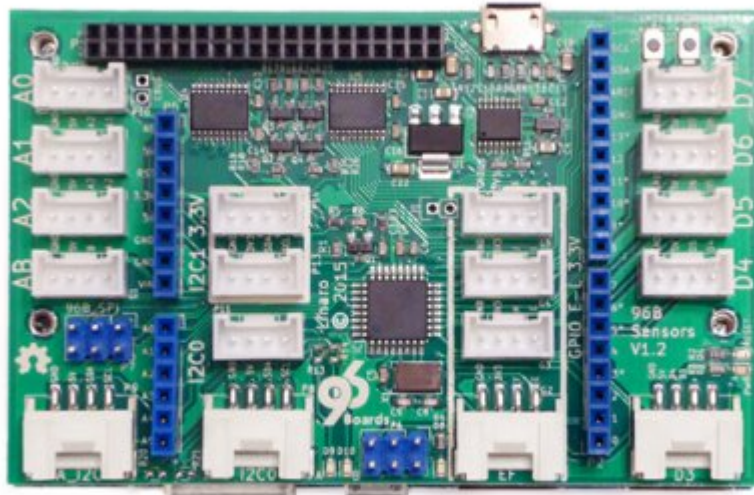

(images/product/102990344_1_01.jpg)

96Boards Sensors

SKU: 102990344

Description

The 96Boards Sensors Mezzanine adapter makes it simple and easy to connect sensors and devices to any 96Boards-compatible base board. With it you can connect your favourite Grove modules and Arduino compatible shields and interface to software running on the 96Boards baseboard. It provides everything you need to start experimenting and prototyping on the 96Boards platform.

On the board you will find sockets for 18 Grove modules, an Arduino-compatible shield socket, and two SPI headers. It also includes an ATmega328 microcontroller which can be programmed from the Arduino IDE and will run most Arduino UNO sketches unchanged. The shield connector and 10 of the Grove sockets are controlled by the microcontroller, while the remaining 8 Grove sockets are controlled directly by the baseboard. This makes it a flexible prototyping platform which supports both direct control of devices from application software, and offload to a microcontroller. It also provides a USB-UART interface to access the baseboard's serial console.

The Sensors board attached on top of a 96Boards CE or EE edition board using the 40pin low-speed expansion connector.

Please note: A 96Boards baseboard is not included.

This board has been tested and works with the Qualcomm Dragonboard 410c and the LeMaker HiKey boards.

Features

- Integrated ATMEGA328p microcontroller (Arduino compatible)
- 18 Grove connectors
 - http://www.seeedstudio.com/wiki/Grove_System
 - 5x baseboard GPIO ports
 - 5x I2C ports (1 for baseboard, 2 for microcontroller)
 - 5 digital ports (for microcontroller)
 - 3x analog ports (for microcontroller)
- 2x SPI connectors (1 to baseboard, 1 to microcontroller)
- Arduino UNO compatible shield connectors
- LED: Power, Reset, 2x baseboard GPIO, 1x microcontroller IO
- UART interface between baseboard and microcontroller
- USB-UART connector for baseboard console and control

Part List

1x 96Boards Sensors Board
4x M2.5 8mm nylon spacer
4x M2.5 nylon screw

For any technical support or suggestion, please kindly go to our forum (<https://www.96boards.org/forums/>).