



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832



Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

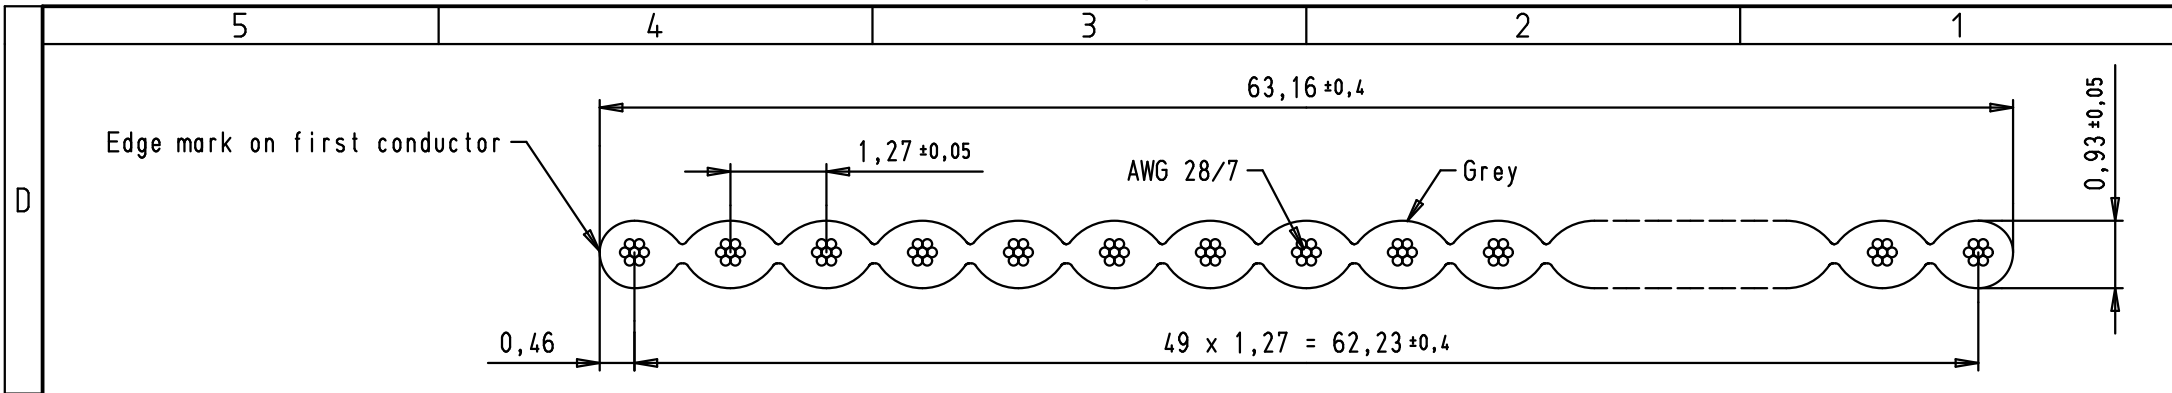



Wire \_\_\_\_\_ Tinned copper  
 Gauge \_\_\_\_\_ AWG 28/7 0,089 mm<sup>2</sup>  
 Voltage rating \_\_\_\_\_ 300 Vr.m.s  
 Current rating \_\_\_\_\_ 2,1A at 25°C  
 Capacity unbalanced \_\_\_\_\_ 45,9 pF/m at 1 MHz  
 Impedance unbalanced \_\_\_\_\_ 105 Ω  
 Propagation delay \_\_\_\_\_ 4,9 ns/m nominal  
 Insulation material \_\_\_\_\_ PVC  
 Temperature rating \_\_\_\_\_ -20°C (operating) to +105°C  
 \_\_\_\_\_ -30°C (static)  
 Flammability rating \_\_\_\_\_ Flame retardant VW1  
 Insulation resistance \_\_\_\_\_ 100 MΩ/km  
 Approval \_\_\_\_\_ UL AWM style 2651

						 All Dim. in mm Orig. Size DIN A 4		SEK 18 flat cable 50 poles		Maßstab/ Scale 10:1
				Dat. 20/10/05 Name JMDR						
				Insp.						
				Stand.						
EC01360 19/02/10 SC		34400 18/09/07 PK		33246 20/10/05 JMDR		HARTING EURL F-95972 Paris		TB 09 18 050 700X		Blatt/ Page 1 / 1
09 18 050 7004 100 m (328 feet)		09 18 050 7001 30,48 m (100 feet)		Mod. Dat. Name				Sub.		
Part number Length per reel										