



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# SMD Power Inductor 104CDMCC/DS




Halogen Free



## Description

- Metal compound molding type construction.
- Magnetically shielded.
- Low audible core noise.
- Suitable for large current.
- L × W × H: 11.5 × 10.3 × 4.0 mm Max.
- Product weight: 2.2 g (Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

## Dimension - [mm]

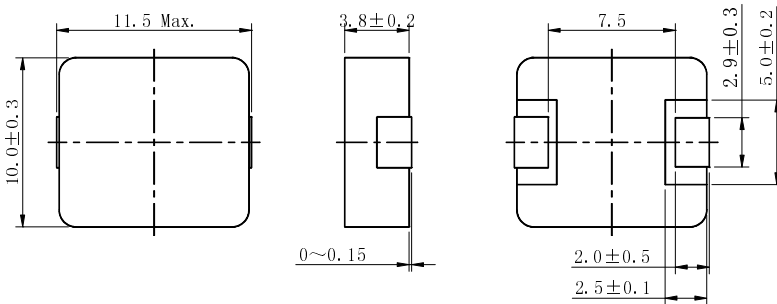


## Environmental Data

- Operating temperature range: -55°C ~ +125°C (including coil's self temperature rise)
- Storage temperature range: -55°C ~ +125°C
- Solder reflow temperature: 260 °C peak.

## Packaging

- Carrier tape and reel packaging.
- 500pcs per reel.

## Land pattern and Schematics - [mm]

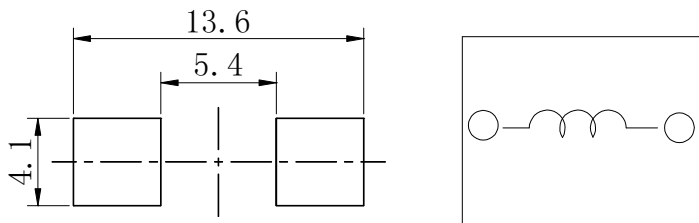

## Applications

- Ideally used in notebook, ultrabook, tablet PC, LCD display, Server application.
- High current, POL converters.
- Low profile, high current power supplies.
- Battery powered devices.
- DC/DC converters in distributed power systems.

# SMD Power Inductor 104CDMCC/DS



## Electrical Characteristics

Part No.	Stamp	Inductance [Within] ( $\mu$ H) ※1	D.C.R (m $\Omega$ ) Max.(Typ.) at 25°C	Saturation Current (A) Max.(Typ.) (at 25°C) ※2	Temperature rise current (A) (Typ.) ※3
104CDMCCDS-R15MC	R15	0.15 $\pm$ 20%	0.65(0.5)	60(71)	43.0
104CDMCCDS-R22MC	R22	0.22 $\pm$ 20%	0.7(0.6)	59(70)	38.0
104CDMCCDS-R30MC	R30	0.30 $\pm$ 20%	0.90(0.78)	44(52)	35.0
104CDMCCDS-R36MC	R36	0.36 $\pm$ 20%	1.06(0.92)	44(52)	32.0
104CDMCCDS-R47MC	R47	0.47 $\pm$ 20%	1.7(1.5)	43(51)	28.0
104CDMCCDS-R56MC	R56	0.56 $\pm$ 20%	1.65(1.43)	34(40)	27.0
104CDMCCDS-R68MC	R68	0.68 $\pm$ 20%	2.25(1.95)	33(39)	23.5
104CDMCCDS-R80MC	R80	0.80 $\pm$ 20%	2.42(2.10)	27(32)	23.0
104CDMCCDS-1R0MC	1R0	1.0 $\pm$ 20%	3.05(2.65)	26(31)	19.5
104CDMCCDS-1R5MC	1R5	1.5 $\pm$ 20%	3.8(3.3)	24(29)	19.0
104CDMCCDS-2R2MC	2R2	2.2 $\pm$ 20%	7.0(6.0)	18(21)	15.0
104CDMCCDS-3R3MC	3R3	3.3 $\pm$ 20%	12.0(10.0)	16(18)	12.0
104CDMCCDS-4R7MC	4R7	4.7 $\pm$ 20%	14.8(12.8)	14(16)	11.0
104CDMCCDS-6R8MC	6R8	6.8 $\pm$ 20%	25.0(22.0)	11.0(12.5)	8.5
104CDMCCDS-8R2MC	8R2	8.2 $\pm$ 20%	27.0(25.0)	10.0(12.0)	8.3
104CDMCCDS-100MC	100	10 $\pm$ 20%	30.0(27.0)	8.5(10.0)	7.5
104CDMCCDS-150MC	150	15 $\pm$ 20%	45.0(40.0)	6.1(7.2)	6.3
104CDMCCDS-220MC	220	22 $\pm$ 20%	66.0(58.0)	5.5(6.5)	5.0
104CDMCCDS-330MC	330	33 $\pm$ 20%	92.0(85.0)	4.4(5.2)	4.1
104CDMCCDS-470MC	470	47 $\pm$ 20%	145(130)	3.6(4.3)	3.2
104CDMCCDS-680MC	680	68 $\pm$ 20%	195(178)	3.4(4.0)	2.5

※1 Measuring frequency Inductance at 100kHz ,1.0V

※2 Saturation current: The value of DC current when the inductance is over 30% of its initial value. (at 25°C )


※3 Temperature rise current: The actual value of DC current when temperature of coil rise is  
 $\Delta T=40^{\circ}\text{C}(T_a=25^{\circ}\text{C})$

# SMD Power Inductor 104CDMCC/DS



## Saturation Current & Temperature Rise Graph

— L (20°C)    —  $\Delta T$

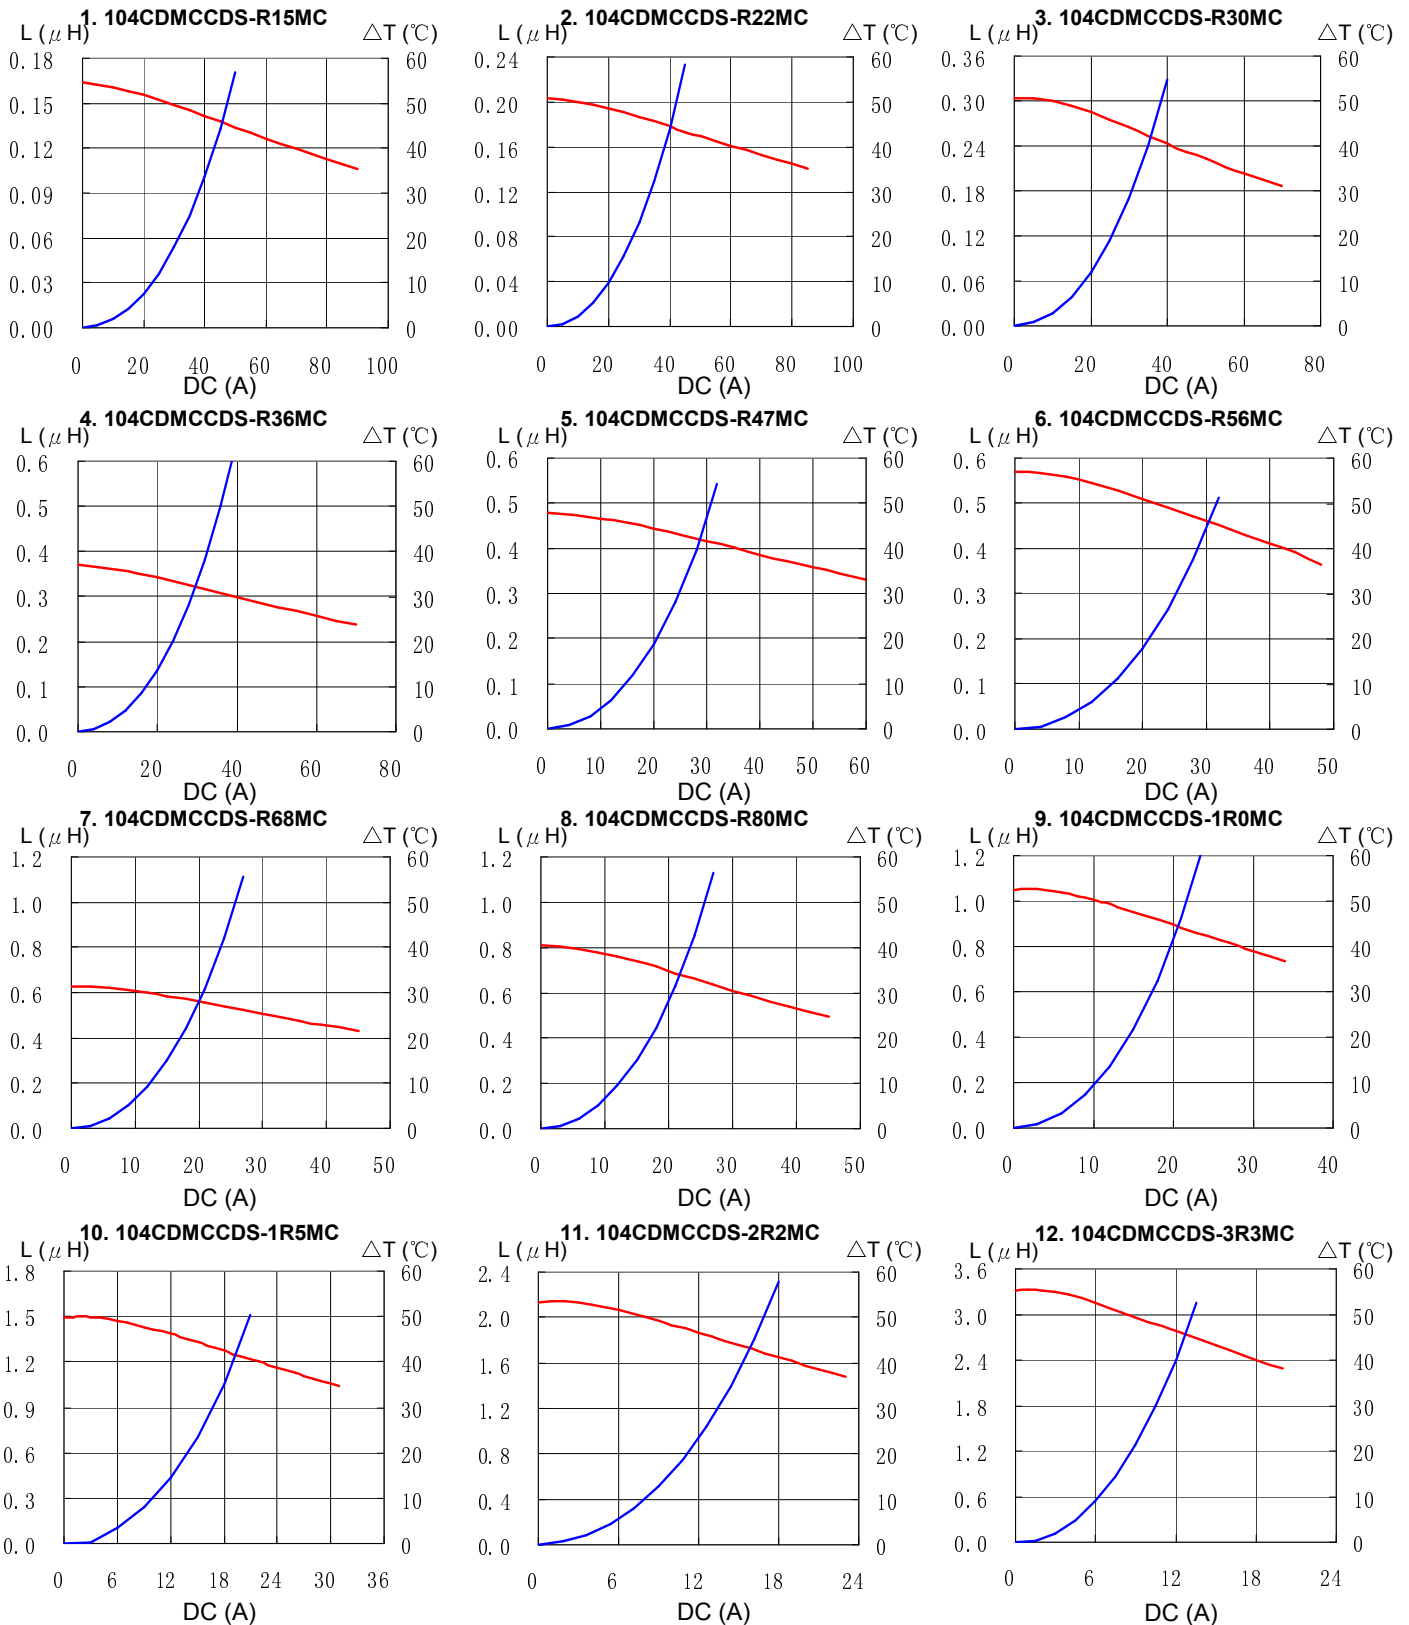












# SMD Power Inductor 104CDMCC/DS



## Saturation Current & Temperature Rise Graph



— L (20°C) —  $\Delta T$

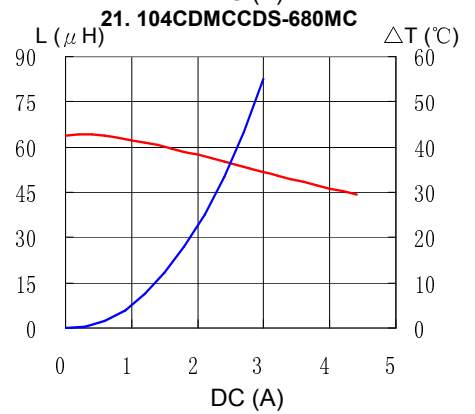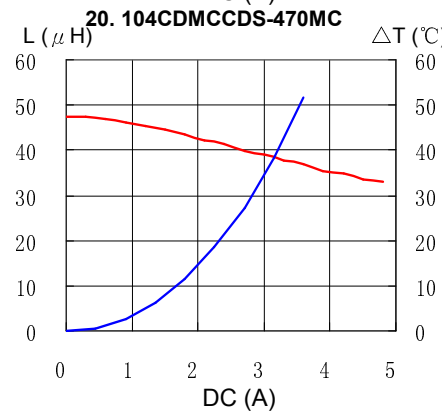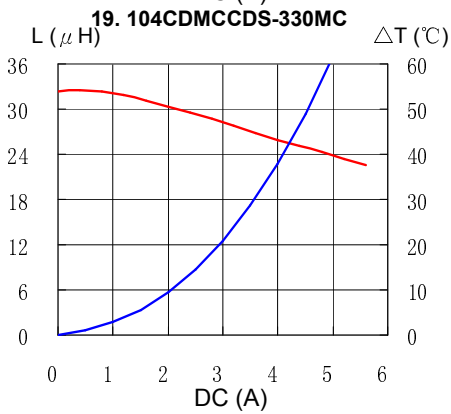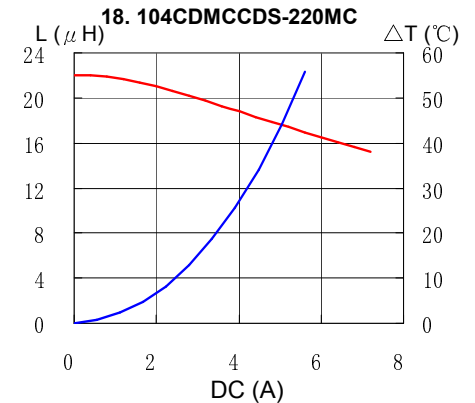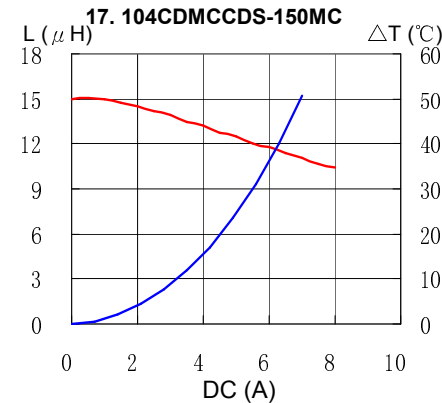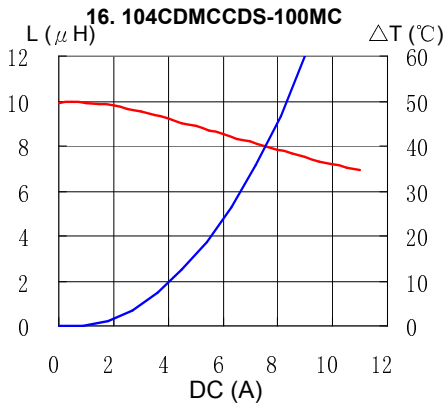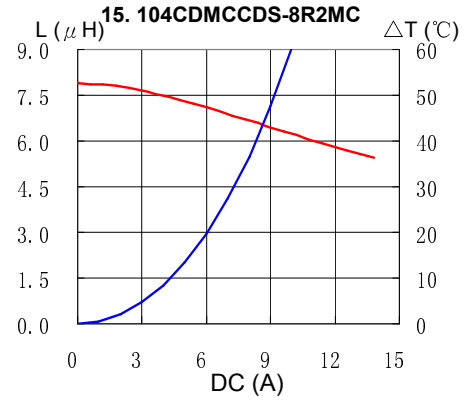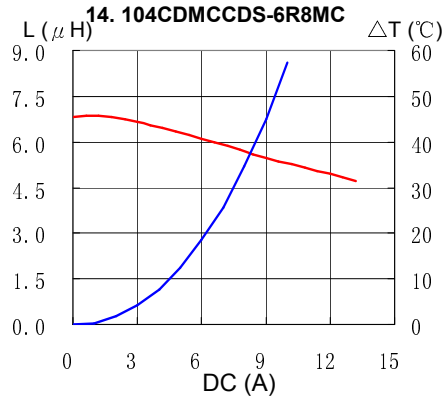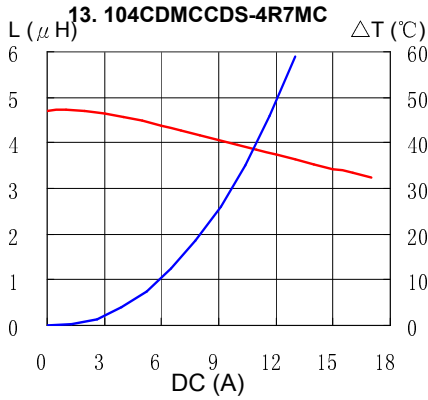

# SMD Power Inductor 104CDMCC/DS



## Solder Reflow Condition

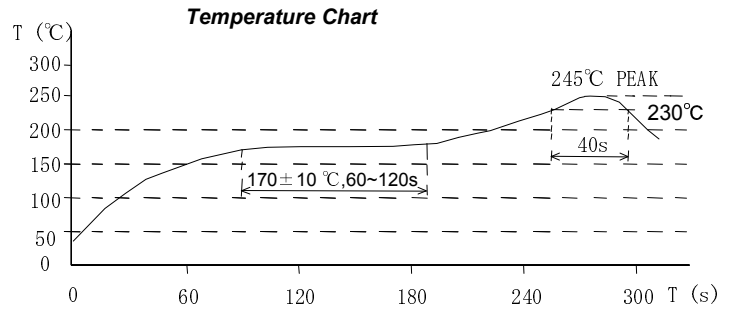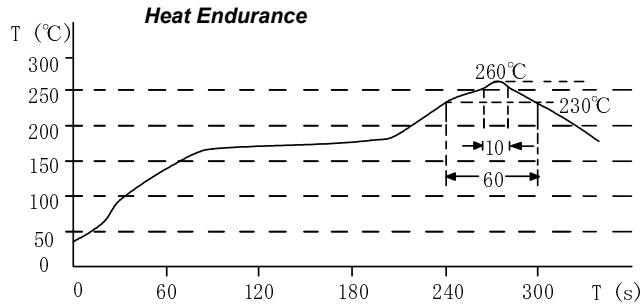

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Oberzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)