



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





GaAs MMIC LOW NOISE AMPLIFIER, 3.5 - 7.0 GHz

Typical Applications


The HMC392LC4 is ideal for:

- Point-to-Point Radios
- VSAT
- LO Driver for HMC Mixers
- Military EW, ECM, C³I
- Space

Features

- Gain: 16 dB
- Noise Figure: 2.5 dB
- Single Supply Voltage: +5V
- No External Matching Components Required
- 50 Ohm Matched Input/Output
- RoHS Compliant 4x4 mm SMT Package

Functional Diagram

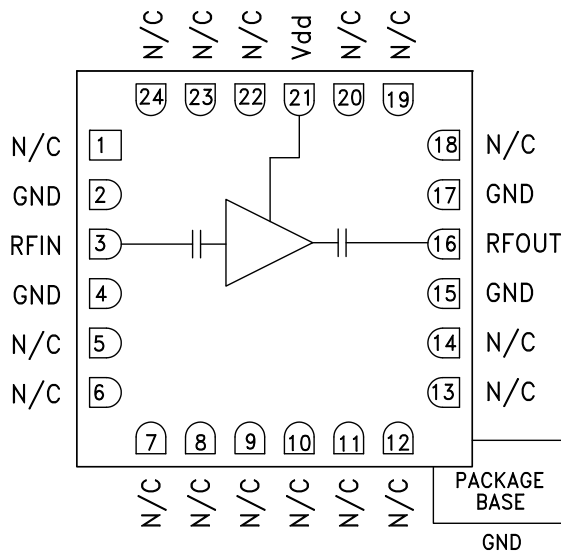

General Description

The HMC392LC4 is a GaAs MMIC Low Noise Amplifier which operates between 3.5 and 7.0 GHz. Housed in a leadless 4x4 mm SMT package, this amplifier provides 16 dB of gain, 2.5 dB noise figure and 30 dBm IP3 from a +5V supply voltage. HMC392LC4 functions well as a low noise front end or as a driver amplifier. The RF I/Os are DC blocked and matched to 50 Ohms for ease of use. The HMC392LC4 allows the use of surface mount manufacturing techniques and is suitable for high reliability military, industrial and space applications.

Electrical Specifications, $T_A = +25^\circ\text{C}$, $V_{dd} = 5V$

| Parameter | Min. | Typ. | Max. | Min. | Typ. | Max. | Units |
|--|-----------|-------|-------|-----------|-------|-------|--------|
| Frequency Range | 4.0 - 6.0 | | | 3.5 - 7.0 | | | GHz |
| Gain | 13.5 | 16 | | 12.5 | 14.5 | | dB |
| Gain Variation Over Temperature | | 0.018 | 0.025 | | 0.018 | 0.025 | dB/ °C |
| Input Return Loss | | 15 | | | 12 | | dB |
| Output Return Loss | | 18 | | | 12 | | dB |
| Output Power for 1 dB Compression (P1dB) | 13 | 16 | | 12 | 16 | | dBm |
| Saturated Output Power (P _{sat}) | | 20 | | | 20 | | dBm |
| Output Third Order Intercept (IP3) | 25 | 30 | | 23 | 30 | | dBm |
| Noise Figure | | 2.5 | 3.1 | | 2.9 | 3.5 | dB |
| Supply Current (I _{dd}) | | 55 | 75 | | 55 | 75 | mA |


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106
 Phone: 781-329-4700 • Order online at www.analog.com
 Application Support: Phone: 1-800-ANALOG-D




GaAs MMIC LOW NOISE AMPLIFIER, 3.5 - 7.0 GHz


Broadband Gain & Return Loss

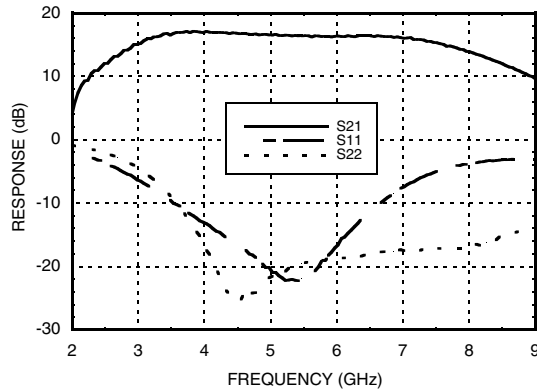


Gain vs. Temperature

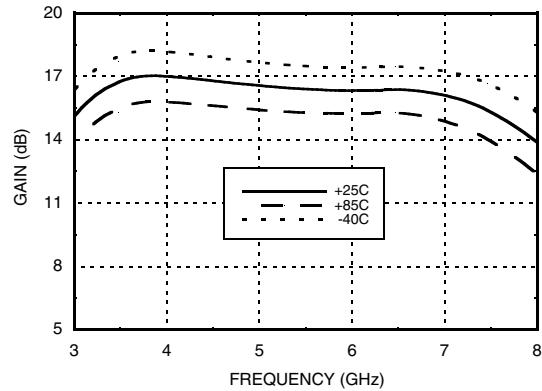


Input Return Loss vs. Temperature

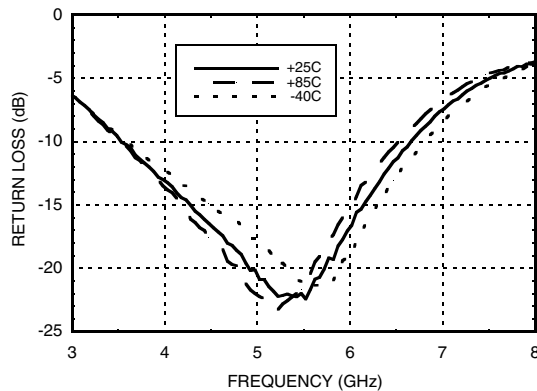


Output Return Loss vs. Temperature

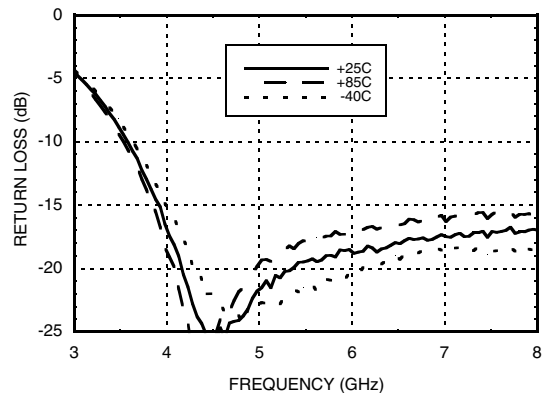

Noise Figure vs. Temperature

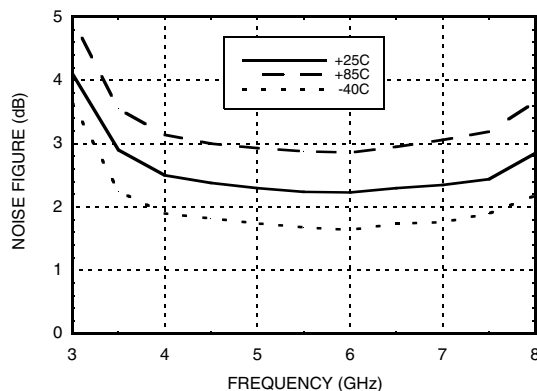


Reverse Isolation vs. Temperature

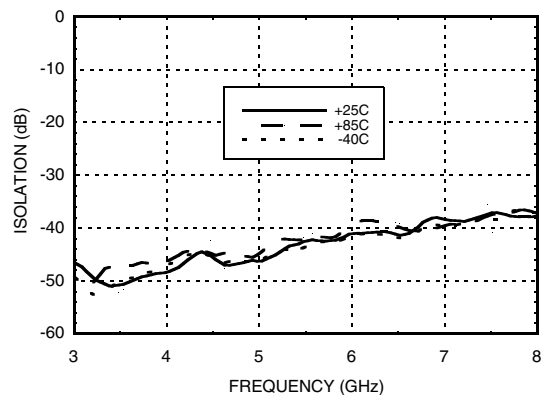




GaAs MMIC LOW NOISE AMPLIFIER, 3.5 - 7.0 GHz


P1dB vs. Temperature

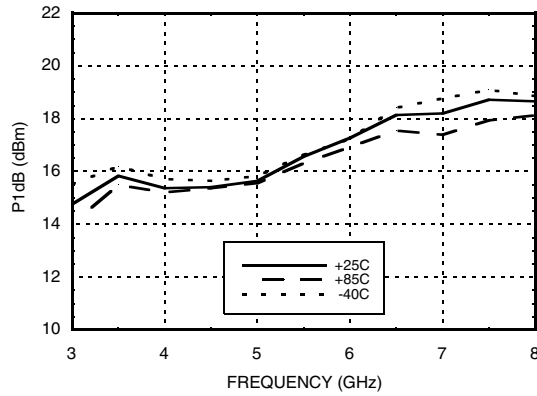


Psat vs. Temperature

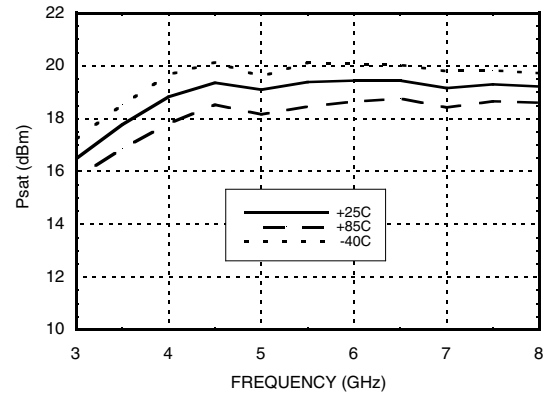


Output IP3 vs. Temperature

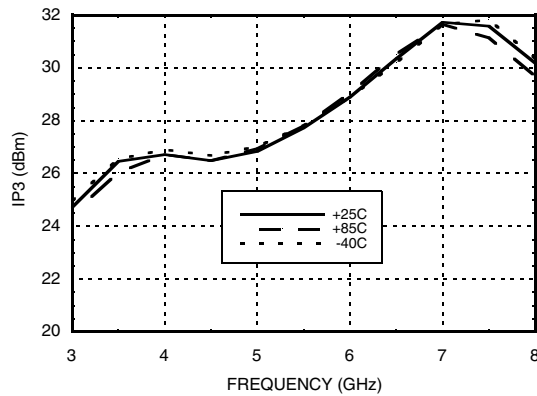

Gain, Noise Figure & Power vs. Supply Voltage @ 5.5 GHz

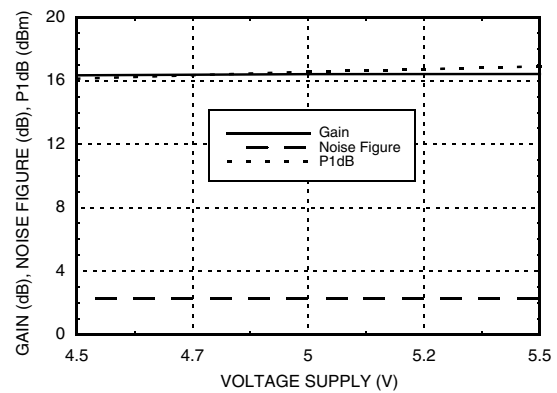

Power Compression @ 5.5 GHz

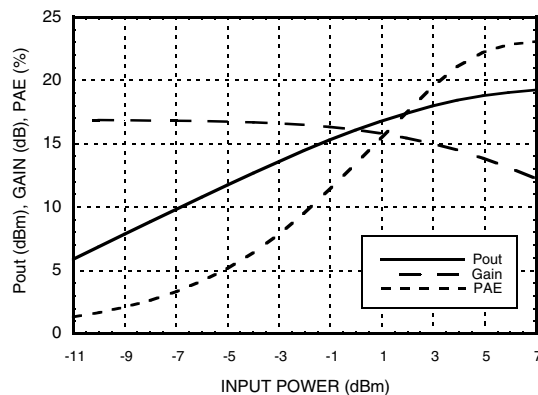

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at www.analog.com Application Support: Phone: 1-800-ANALOG-D


**GaAs MMIC LOW NOISE
AMPLIFIER, 3.5 - 7.0 GHz**
Absolute Maximum Ratings

| | |
|---|----------------|
| Drain Bias Voltage (Vdd) | +7 Vdc |
| RF Input Power (RFIN)(Vdd = +5.0 Vdc) | +11 dBm |
| Channel Temperature | 175 °C |
| Continuous P _{diss} (T= 85 °C) (derate 6.5 mW/°C above 85 °C) | 0.42 W |
| Thermal Resistance (channel to ground paddle) | 155 °C/W |
| Storage Temperature | -65 to +150 °C |
| Operating Temperature | -40 to +85 °C |

Typical Supply Current vs. Vdd

| Vdd (V) | I _{dd} (mA) |
|---------|----------------------|
| +4.5 | 54 |
| +5.0 | 55 |
| +5.5 | 56 |

Note: Amplifier will operate over full voltage ranges shown above.




**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**



**GaAs MMIC LOW NOISE
AMPLIFIER, 3.5 - 7.0 GHz**

Outline Drawing

BOTTOM VIEW

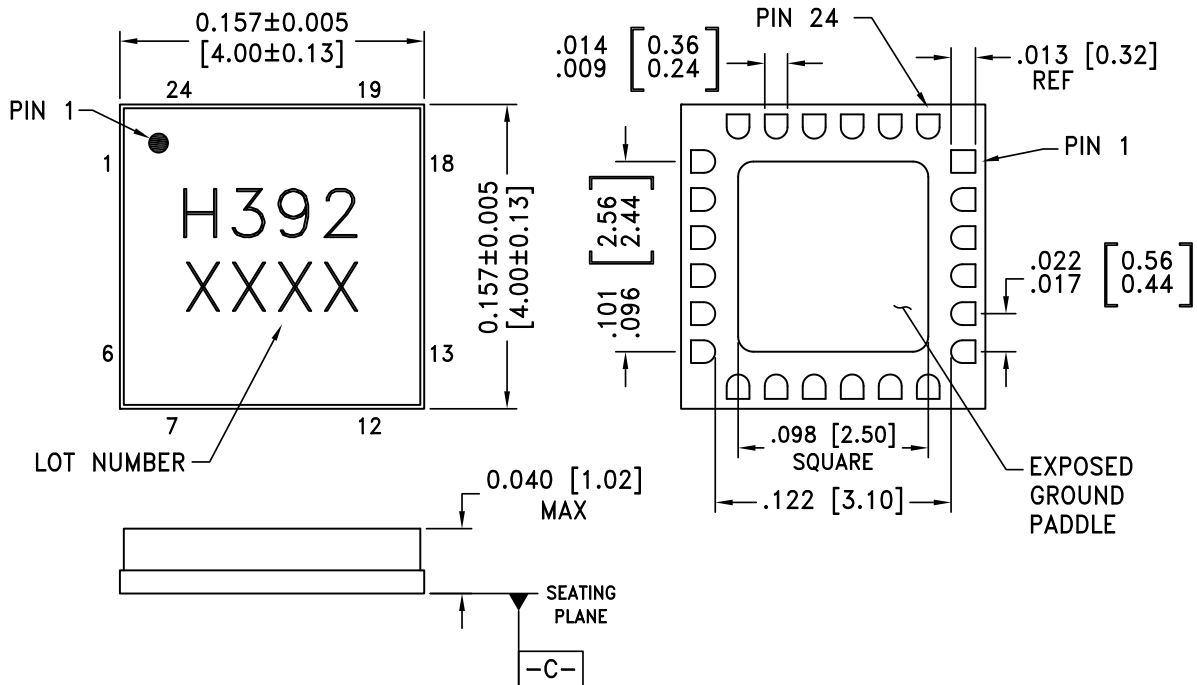

NOTES:

1. PACKAGE BODY MATERIAL: ALUMINA.
2. LEAD AND GROUND PADDLE PLATING: 30-80 MICROINCHES GOLD OVER 50 MICROINCHES MINIMUM NICKEL.
3. DIMENSIONS ARE IN INCHES (MILLIMETERS).
4. LEAD SPACING TOLERANCE IS NON-CUMULATIVE.
5. CHARACTERS TO BE HELVETICA MEDIUM, .025 HIGH, BLACK INK, OR LASER MARK LOCATED APPROX. AS SHOWN.
6. PACKAGE WARP SHALL NOT EXCEED 0.05MM DATUM $\boxed{-C-}$
7. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.





Package Information

| Part Number | Package Body Material | Lead Finish | MSL Rating | Package Marking ^[2] |
|-------------|-----------------------|------------------|---------------------|--------------------------------|
| HMC392LC4 | Alumina, White | Gold over Nickel | MSL3 ^[1] | H392 XXXX |

[1] Max peak reflow temperature of 260 °C

[2] 4-Digit lot number XXXX



**GaAs MMIC LOW NOISE
AMPLIFIER, 3.5 - 7.0 GHz**
Pin Descriptions

| Pin Number | Function | Description | Interface Schematic |
|--------------------------------|----------|--|---|
| 1, 5 - 14, 18 - 20, 22 - 24 | N/C | No connection required. These pins may be connected to RF/DC ground without affecting performance. | |
| 2, 4, 15, 17 | GND | Package bottom has an exposed metal paddle that must also be connected to RF/DC ground. |  |
| 3 | RFIN | This pin is AC coupled and matched to 50 Ohms. |  |
| 16 | RFOUT | This pin is AC coupled and matched to 50 Ohms. |  |
| 21 | Vdd | Power Supply Voltage for the amplifier. External bypass capacitors of 100 pF, 1000pF, and 2.2 μF are required. |  |



**GaAs MMIC LOW NOISE
AMPLIFIER, 3.5 - 7.0 GHz**

Evaluation PCB

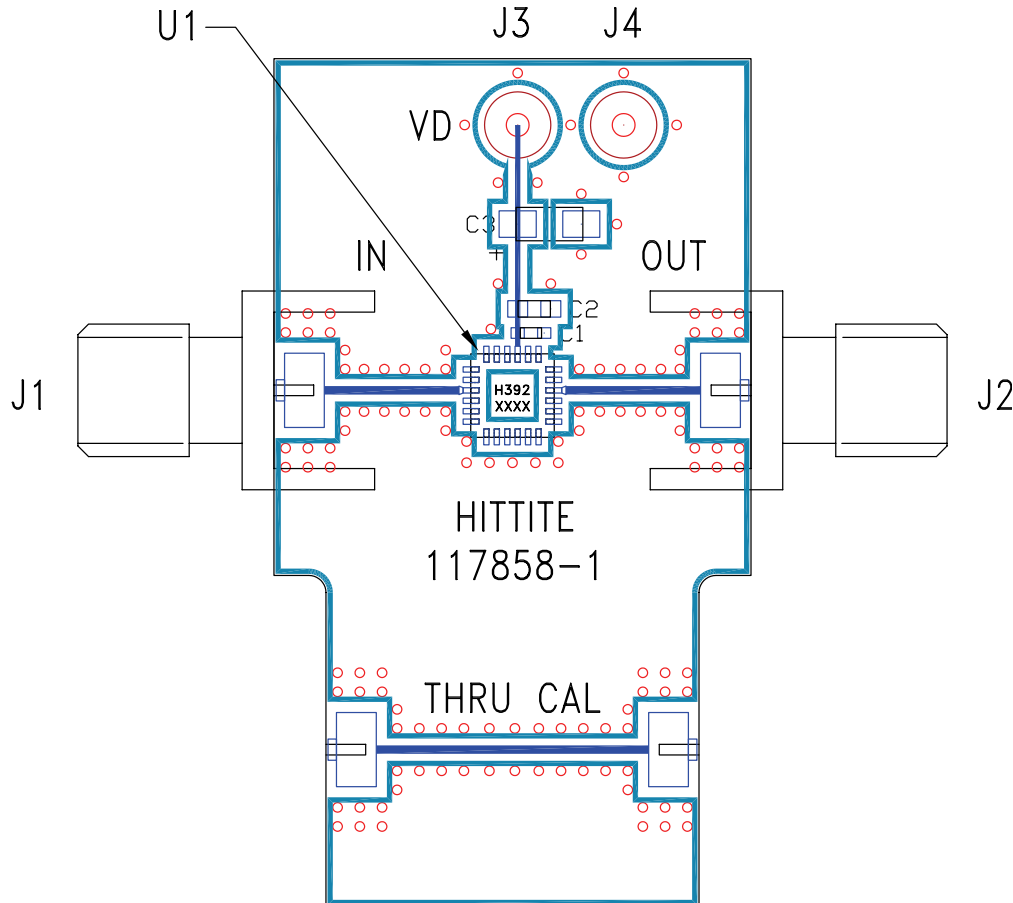

List of Materials for Evaluation PCB 117490 [1]

| Item | Description |
|---------|--------------------------------|
| J1, J2 | SMA |
| J3 - J4 | DC Pin |
| C1 | 100 pF capacitor, 0402 Pkg.. |
| C2 | 1,000 pF Capacitor, 0603 Pkg.. |
| C3 | 2.2µF Capacitor, Tantalum |
| U1 | HMC392LC4 Amplifier |
| PCB [2] | 117858 Evaluation PCB |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350.

The circuit board used in this application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.

**GaAs MMIC LOW NOISE
AMPLIFIER, 3.5 - 7.0 GHz**