



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Number of contacts

48, 32

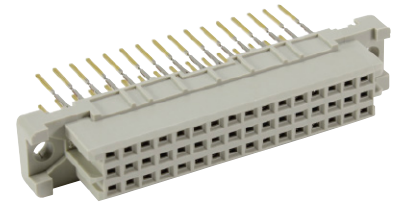

Female connectors

Identification	No. of contacts	Contact arrangement	Performance levels according to IEC 60603-2. Explanation chapter 00		
			3	2	1
Female connector with press-in pins 3.7 mm	48			09 23 248 6866	
Female connector with press-in pins 4.5 mm	48			09 23 248 6850	09 23 248 2850
	32			09 23 248 6850 222 ^{f)} 09 23 232 6850	
Female connector with press-in pins 13 mm	48			09 23 248 6861	
	32			09 23 232 6861	
Female connector with press-in pins 17 mm	48			09 23 248 6862	
with press-in terminations for rear interfacing Usage of HARTING shroud recommended: contacts for rear interfacing selectively gold plated (performance level 3)					

Identification	No. of contacts	Part number	Drawing	Dimensions in mm
Female connector for crimp contacts Order contacts separately see page 01.28				
Type 2C	48	09 23 048 3214 ^{f)}		
Type 2C Position marking turned for mating type 2R male	48	09 23 048 3217 ^{f)}		

Other contact arrangements on request

^{f)} Railway classification NFF 16-101, Smoke index: F1, Flammability class: I2