

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Technical Data Sheet		Rosenberger	
P-SMP	ADAPTOR	119K106-K00N5	

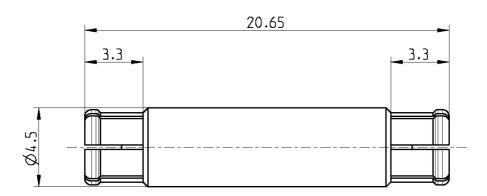



All dimensions are in mm; tolerances acc. to ISO 2768 m-H

Interface	
According to	Rosenberger P-SMP
Documents	
Boodinento	N/A

Material and plating Connector parts Center contact	Material CuBe	Plating AuroDur®, gold plated Flash white bronze over silver(e.g. Optergen®)
Outer contact Dielectric	CuBe PTFE	Flash white bronze over silver(e.g. Optargen®)

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel.: +49 8684 18-0 Fax: +49 8684 18-499 email: <u>info@rosenberger.de</u> Page

1 / 2

Technical Data Sheet

Rosenberger

ADAPTOR 119K106-K00N5 P-SMP

Electrical data

Impedance 50Ω

Frequency DC to 10 GHz Return loss \geq 30 dB, DC to 2 GHz

 \geq 27 dB, 2 to 4 GHz

≥ 24 dB, 4 to 6 GHz

 $\leq 0.05 \text{ x } \sqrt{\text{f(GHz)}} \text{ dB}$ Insertion loss

Insulation resistance \geq 5 G Ω Center contact resistance \leq 3.0 m Ω Outer contact resistance \leq 2.0 m Ω Test voltage (at sea level) 1000 V rms Working voltage (at sea level) 480 V rms

Power handling (at 20 °C, sea level, VSWR 1.0) ≤ 200 W @ 2.2 GHz Intermodulation (3rd order) ≥ 160 dBc (2 x 43 dBm)

Mechanical data

Mating cycles

if mating part is Smooth bore, Catchers mitt ≥ 1000 if mating part is Limited detent ≥ 100 if mating part is Full detent ≥ 100 Center contact captivation ≥ 7 N Engagement force

- Smooth bore, Catchers mitt \leq 10 N - Limited detent ≤ 45 N - Full detent ≤ 68 N

Disengagement force

- Smooth bore, Catchers mitt \geq 2.2 N - Limited detent ≥ 15 N - Full detent ≥ 25 N Permissible angular misalignment 2.8°

Environmental data

Temperature range -65°C to +165°C

Rapid change of temperature IEC 60169-1, Sub-clause 16.4 (-65°C to +165°C)

Vibration IEC 60068-2-64 random Shock IEC 60068-2-27 (half-sine)

High temperature endurance IEC 60169-1, Sub-clause 18 (+165°C, 1000 hours)

compliant RoHS

Weight

Weight 1.2 g/pc

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date		Rev.	Engineering change number	Name	Date
Gramsamer Josef	08.10.09	Sa. Krautenbacher	10.03.14		b00	14-0352	T. Krojer	10.03.14
Rosenberger Hochfrequenztechnik GmbH & Co. KG Tel.: +49 8684 18-0								Page
P.O.Box 1260 D-84526 Tittmoning Germany						ax: +49 8684 18-499		
www.rosenberger.de					er	nail: <u>info@rosenberger.de</u>		2 / 2