



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Available
September 2015



Han® standard metal hoods and housings for industrial applications


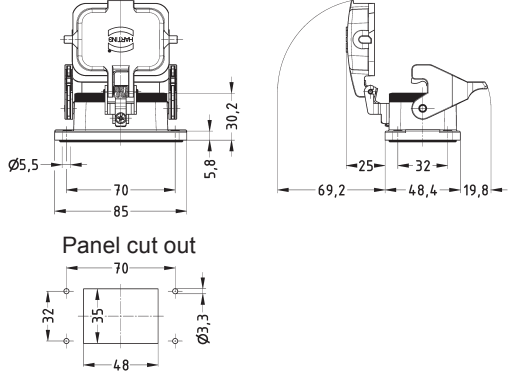


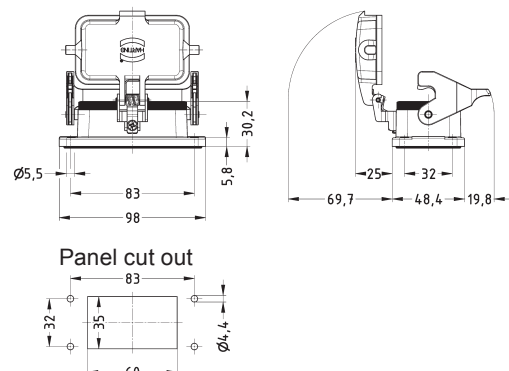


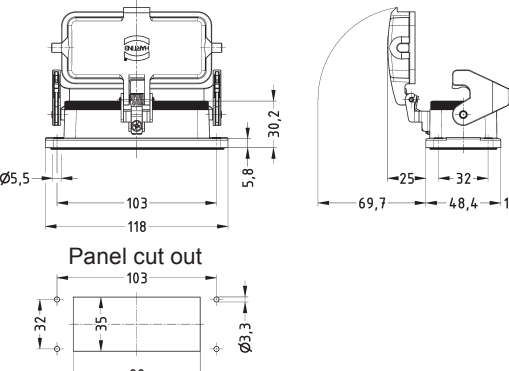


Features

- Compatible with all standard hoods and housings
- Proven locking system Han-Easy Lock®
- Automatic closing mechanism
- Protection degree IP66 und IP67
- Protective collar keeps the seal in place

Technical characteristics

Hoods / housings

Material	aluminium die cast
Colour	RAL 7037 (blue)
Surface	powder coated
Locking element	stainless steel
Lever type	Han-Easy Lock®
Seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Protection degree acc. to DIN EN 60 529 in locked position	IP66 / IP67
Protection degree acc. to DIN EN 60 529 in unlocked position	IP44

Identification	Part number	Drawing	Dimensions in mm
<p>Housing, bulkhead mounting 6 B with self-closing cap</p> 	<p>09 30 006 1306</p>		
<p>Housing, bulkhead mounting 10 B with self-closing cap</p> 	<p>09 30 010 1306</p>		
<p>Housing, bulkhead mounting 16 B with self-closing cap</p> 	<p>09 30 016 1306</p>		
<p>Housing, bulkhead mounting 24 B with self-closing cap</p> 	<p>09 30 024 1306</p>	