



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# One-4-All™ International Transformers Printed Circuit Mount



International Standards at Lower Cost with Better Performance



Signal's 14A transformers are used in low power applications and provide the high isolation, creepage and clearance necessary to comply with international safety standards.

#### General Specifications

- Power - 2.5 VA to 56 VA
- Dielectric Strength - 4000 Vrms Hipot
- Dual Primaries - 115/230 V - 50/60 Hz
- Dual Secondaries - Series or parallel
- Insulation System - Class F, 155°C, UL 1446 (E66312)
- Flammability Rating - Bobbin and shroud material meet UL 94-V0

#### Agency Certifications

- UL recognized to UL 506 / UL 5085-2, File # E63829
- CSA certified to C22.2 No. 66.1, File # 221070
- VDE certified to VDE 0805 / EN 60950, File # 1446

# CSA certified to C22.2 No. 66.3 / UL5085-3, File # 221070 - Class 2 Energy Limited



| Part Number  | VA   | Secondary RMS Rating |              |
|--------------|------|----------------------|--------------|
|              | Size | Series               | Parallel     |
| 14A-2.5R-10  | 2.5  | 10.0VCT @ 0.25A      | 5.0V @ 0.50A |
| 14A-5.0R-10  | 5    | 10.0VCT @ 0.50A      | 5.0V @ 1.00A |
| 14A-10R-10   | 10   | 10.0VCT @ 1.00A      | 5.0V @ 2.00A |
| 14A-2.5R-12# | 2.5  | 12.6VCT @ 0.20A      | 6.3V @ 0.40A |
| 14A-5.0R-12# | 5    | 12.6VCT @ 0.40A      | 6.3V @ 0.80A |
| 14A-10R-12#  | 10   | 12.6VCT @ 0.80A      | 6.3V @ 1.60A |
| 14A-2.5R-16# | 2.5  | 16.0VCT @ 0.15A      | 8.0V @ 0.30A |
| 14A-5.0R-16# | 5    | 16.0VCT @ 0.31A      | 8.0V @ 0.62A |
| 14A-10R-16#  | 10   | 16.0VCT @ 0.62A      | 8.0V @ 1.25A |
| 14A-2.5R-20# | 2.5  | 20.0VCT @ 0.12A      | 10V @ 0.24A  |
| 14A-5.0R-20# | 5    | 20.0VCT @ 0.25A      | 10V @ 0.50A  |
| 14A-10R-20#  | 10   | 20.0VCT @ 0.50A      | 10V @ 1.00A  |
| 14A-2.5R-24# | 2.5  | 24.0VCT @ 0.10A      | 12V @ 0.20A  |
| 14A-5.0R-24# | 5    | 24.0VCT @ 0.21A      | 12V @ 0.42A  |
| 14A-10R-24#  | 10   | 24.0VCT @ 0.42A      | 12V @ 0.84A  |
| 14A-2.5R-28  | 2.5  | 28.0VCT @ 0.09A      | 14V @ 0.18A  |
| 14A-5.0R-28  | 5    | 28.0VCT @ 0.18A      | 14V @ 0.36A  |
| 14A-10R-28   | 10   | 28.0VCT @ 0.36A      | 14V @ 0.72A  |
| 14A-2.5R-36  | 2.5  | 36.0VCT @ 0.07A      | 18V @ 0.14A  |
| 14A-5.0R-36  | 5    | 36.0VCT @ 0.14A      | 18V @ 0.28A  |
| 14A-10R-36   | 10   | 36.0VCT @ 0.28A      | 18V @ 0.56A  |

| Part Number | VA   | Secondary RMS Rating |              |
|-------------|------|----------------------|--------------|
|             | Size | Series               | Parallel     |
| 14A-20-10   | 20   | 10.0VCT @ 2.0A       | 5.0V @ 4.0A  |
| 14A-30-10   | 30   | 10.0VCT @ 3.0A       | 5.0V @ 6.0A  |
| 14A-56-10   | 56   | 10.0VCT @ 5.6A       | 5.0V @ 11.2A |
| 14A-20-12#  | 20   | 12.6VCT @ 1.6A       | 6.3V @ 3.2A  |
| 14A-30-12#  | 30   | 12.6VCT @ 2.4A       | 6.3V @ 4.8A  |
| 14A-56-12   | 56   | 12.6VCT @ 4.4A       | 6.3V @ 8.8A  |
| 14A-20-16#  | 20   | 16.0VCT @ 1.25A      | 8.0V @ 2.5A  |
| 14A-30-16#  | 30   | 16.0VCT @ 1.9A       | 8.0V @ 3.8A  |
| 14A-56-16   | 56   | 16.0VCT @ 3.5A       | 8.0V @ 7.0A  |
| 14A-20-20#  | 20   | 20.0VCT @ 1.0A       | 10V @ 2.0A   |
| 14A-30-20#  | 30   | 20.0VCT @ 1.5A       | 10V @ 3.0A   |
| 14A-56-20   | 56   | 20.0VCT @ 2.8A       | 10V @ 5.6A   |
| 14A-20-24#  | 20   | 24.0VCT @ 0.83A      | 12V @ 1.66A  |
| 14A-30-24#  | 30   | 24.0VCT @ 1.25A      | 12V @ 2.50A  |
| 14A-56-24   | 56   | 24.0VCT @ 2.33       | 12V @ 4.66A  |
| 14A-20-28   | 20   | 28.0VCT @ 0.72A      | 14V @ 1.44A  |
| 14A-30-28   | 30   | 28.0VCT @ 1.06A      | 14V @ 2.12A  |
| 14A-56-28   | 56   | 28.0VCT @ 2.0A       | 14V @ 4.0A   |
| 14A-20-36   | 20   | 36.0VCT @ 0.56A      | 18V @ 1.12A  |
| 14A-30-36   | 30   | 36.0VCT @ 0.82A      | 18V @ 1.64A  |
| 14A-56-36   | 56   | 36.0VCT @ 1.56A      | 18V @ 3.12A  |

Custom versions available upon request.

©2015 Signal Transformer Inc. Specifications subject to change without notice. 07.15





www.signaltransformer.com

500 Bayview Avenue, Inwood, NY 11096  
Toll Free 866-239-5777 • Tel 516-239-5777 • Fax 516-239-7208  
sales@signaltransformer.com • techhelp@signaltransformer.com

# One-4-All™ International Transformers Printed Circuit Mount

International Standards at Lower Cost with Better Performance

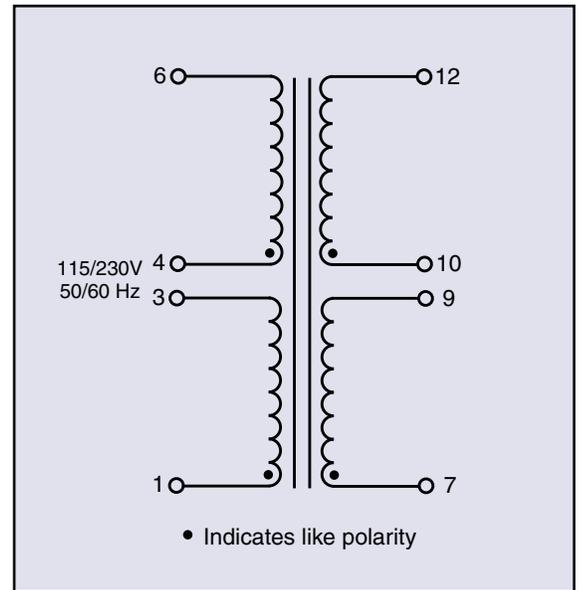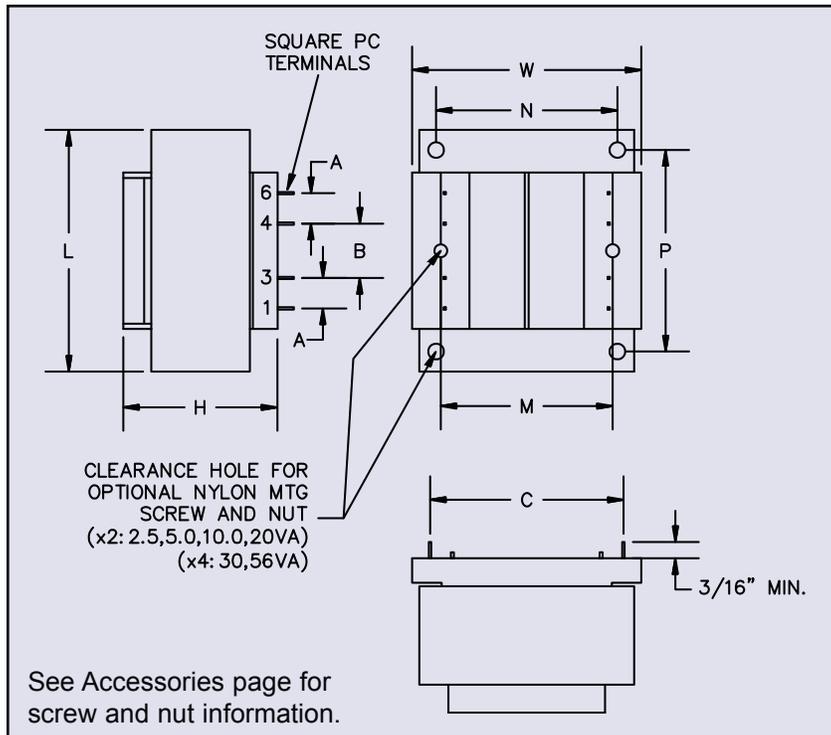

| VA   | Mechanical Dimensions |                |                |                |                 |                | Sq. Pin Dimensions | Mounting Dimensions |                |                | Mounting Screw |     | Weight          |
|------|-----------------------|----------------|----------------|----------------|-----------------|----------------|--------------------|---------------------|----------------|----------------|----------------|-----|-----------------|
|      | L                     | W              | H*             | A              | B               | C              |                    | M                   | N              | P              | Size           | Qty |                 |
| Size | Inches (mm)           |                |                |                |                 |                |                    |                     |                |                | Size           | Qty | lbs (kg)        |
| 2.5  | 1.62<br>(41.3)        | 1.43<br>(36.5) | 1.12<br>(28.6) | 0.20<br>(5.08) | 0.25<br>(6.35)  | 1.00<br>(25.4) | 0.025<br>(0.64)    | 1.06<br>(26.9)      | -              | -              | #4             | 2   | 0.25<br>(0.113) |
| 5    | 1.62<br>(41.3)        | 1.43<br>(36.5) | 1.37<br>(34.9) | 0.20<br>(5.08) | 0.40<br>(10.16) | 1.00<br>(25.4) | 0.025<br>(0.64)    | 1.06<br>(26.9)      | -              | -              | #4             | 2   | 0.37<br>(0.168) |
| 10   | 1.87<br>(47.6)        | 1.56<br>(39.7) | 1.37<br>(34.9) | 0.20<br>(5.08) | 0.40<br>(10.16) | 1.14<br>(29.0) | 0.036<br>(0.91)    | 1.25<br>(31.7)      | -              | -              | #4             | 2   | 0.53<br>(0.240) |
| 20   | 2.25<br>(57.2)        | 1.87<br>(47.6) | 1.62<br>(41.3) | 0.40<br>(10.2) | 0.40<br>(10.2)  | 1.46<br>(37.1) | 0.036<br>(0.91)    | 1.50<br>(38.1)      | -              | -              | #4             | 2   | 0.90<br>(0.41)  |
| 30   | 2.62<br>(66.7)        | 2.18<br>(55.5) | 1.56<br>(39.7) | 0.55<br>(13.9) | 0.27<br>(7.0)   | 1.68<br>(42.7) | 0.045<br>(1.14)    | -                   | 1.75<br>(44.4) | 2.18<br>(55.5) | #6             | 4   | 1.15<br>(0.52)  |
| 56   | 3.00<br>(76.2)        | 2.50<br>(63.5) | 1.83<br>(46.5) | 0.60<br>(15.2) | 0.30<br>(7.6)   | 1.90<br>(48.3) | 0.045<br>(1.14)    | -                   | 2.00<br>(50.8) | 2.50<br>(63.5) | #6             | 4   | 1.70<br>(0.77)  |

\*Note: Dimension H represents the total distance from the seating plane to the uppermost surface, stand offs and/or risers inclusive.

Custom versions available upon request.

©2015 Signal Transformer Inc. Specifications subject to change without notice. 07.15



www.signaltransformer.com

500 Bayview Avenue, Inwood, NY 11096  
Toll Free 866-239-5777 • Tel 516-239-5777 • Fax 516-239-7208  
sales@signaltransformer.com • techhelp@signaltransformer.com