

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








TECHNICAL DATA SHEET

Rosenberger

QN

STRAIGHT PLUG

153QS108-108N5

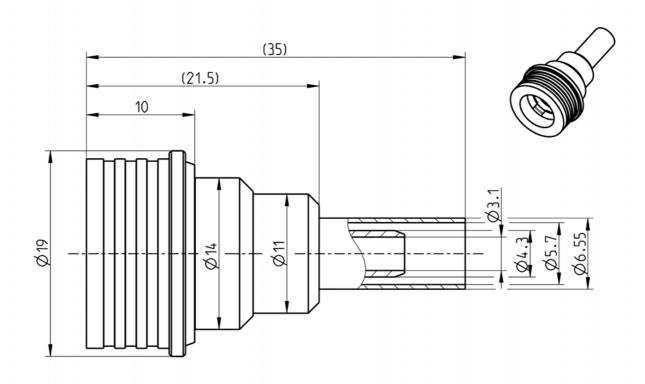

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to

153QS000-000, DCA-00067913

Documents

Assembly instruction Panel piercing

51 P15 N/A

Material and plating

Connector parts

Center contact

Outer contact

Contact spring

Dielectric

Gasket

Crimping ferrule

Material Plating

Brass AuroDur®, gold plated

Brass Flash white bronze over silver(e.g. Optargen®)

Beryllium copper AuroDur®, gold plated

PTFE

Silicone

Copper Flash white bronze over silver(e.g. Optargen®)

RF_35/11.05/3.1

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de Tel.: +49 8684 18-0 Fax: +49 8684 18-499

Fax: +49 8684 18-499 email: info@rosenberger.de

Page

1 / 2

TECHNICAL DATA SHEET

Rosenberger

2/2

QN STRAIGHT PLUG

153QS108-108N5

Electrical data

Impedance 50 Ω

Frequency DC to 11 GHz

Return loss \geq 32 dB, DC to 1 GHz

 \geq 27 dB, 1 to 6 GHz

Insertion loss $\leq 0.05 \text{ dB x } \sqrt{\text{f [GHz]}}$

 $\begin{array}{lll} \mbox{Insulation resistance} & \geq 5 \ \mbox{x} 10^3 \ \mbox{M}\Omega \\ \mbox{Center contact resistance} & \leq 1.5 \ \mbox{m}\Omega \\ \mbox{Outer contact resistance} & \leq 1.5 \ \mbox{m}\Omega \\ \mbox{Test voltage (at sea level)} & 2500 \ \mbox{V rms} \\ \mbox{Working voltage (at sea level)} & 1000 \ \mbox{V rms} \\ \end{array}$

RF-leakage $$\le$ -90 dB, 100 MHz to 3 GHz Power handling (at 20 °C, sea level, VSWR 1.0) \$300 W @2.5 GHz (typ.)

Mechanical data

Mating cyclesmin. 100Center contact captivation: axial $\geq 28 \text{ N}$ Engagement force30 N (typ.)Disengagement force30 N (typ.)

Environmental data

Temperature range -40°C to +125°C

Thermal shock MIL-STD-202, Meth. 107 D, Cond. B
Corrosion MIL-STD-202, Meth. 101 D, Cond. B
Vibration MIL-STD-202, Meth. 204 D, Cond. A
Shock MIL-STD-202, Meth. 213, Cond. I

Moisture resistance MIL-STD-202, Meth. 106 F

Degree of protection (mated pair) IEC 60529, IP68 0.3 bar (interface only)

RoHS compliant

Tooling

Crimping tool 11W150-000 Crimp insert 11W150-208

Suitable cables

www.rosenberger.de

RG 223 /U, RG 400 /U, RG 142 B/U

email: info@rosenberger.de

Weight

Weight 18 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date		Rev.	Engineering change number	Name	Date	ı
A.Fellner	08/02/06	Sa. Krautenbacher	11.03.14		b00	14-0352	T. Krojer	11.03.14	
Rosenberger Hochfrequenztechnik GmbH & Co. KG						el.: +49 8684 18-0		Page	
P.O.Box 1260 D-84526 Tittmoning Germany						ax: +49 8684 18-499			ĺ

RF_35/11.05/3.1

⁻ Limitations are possible due to the used cable type -