



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Isolation (115VAC to 115VAC) 171 Series

Plug-In




Features

- Primary 115VAC, 50/60 Hz., Secondary 115VAC
- Provides complete circuit isolation.
- Electrostatic shield between primary & secondary to greatly attenuate surges and noise.
- Hi-pot tested to 2 KV RMS.
- Circuit breaker in primary.
- Standard 3-wire, grounded plug & receptacle.
- Input (primary) connected to 5 foot long cord & standard North American plug (NEMA 5-15P).
- Output (secondary) connected to 1 foot long "pig tail" cord, 3-wire, standard North American grounded receptacle (NEMA 5-15R).
- North American Mark of Safety - C UL & UL listed (File #E211544)
- Indoor use only
- **Remember** - These units do NOT convert line frequency

Accessories

- International Grounded Adaptor Plugs

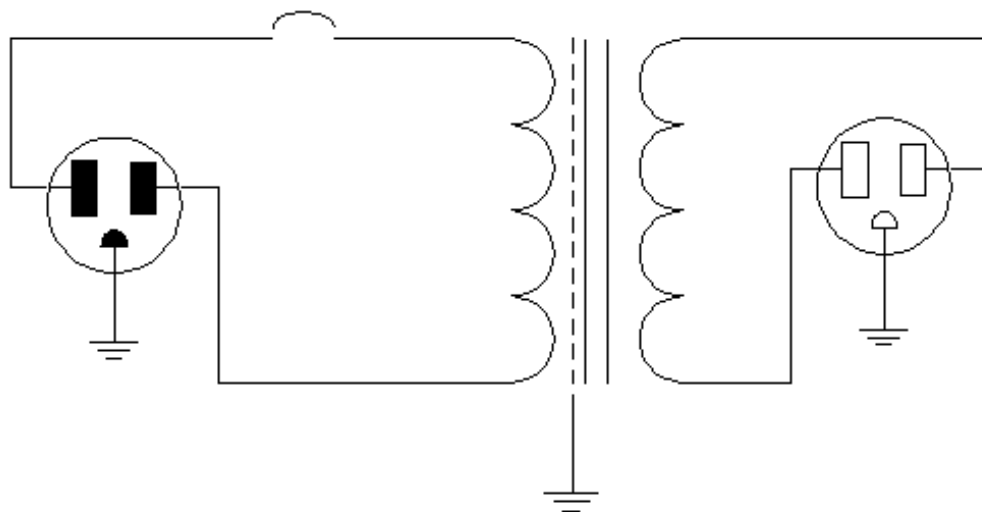

Part No.	Capacity VA	Leakage Current μ A	Full Load Efficiency	Full Load Total		Capacitance Between Windings @ 1Khz	Circuit Breaker (Amps)	Dimensions					Weight Lbs
				Harmonic Distortion	Surge/ Noise Suppression dB			A	B	C	D	E	
171A	100	72.12 μ A	89%	0.21%	-37.7 dB	15 pF	1	3.80	5.06	4.68	3.00	3.38	6.5
171B	200	47.52 μ A	93%	0.195 %	-37.15 dB	15 pF	2	3.80	5.56	4.68	3.00	3.88	8
171C	300	54.92 μ A	94%	0.24%	-34.32 dB	20 pF	3	3.80	6.06	4.68	3.00	4.38	11
171E	500	59.66 μ A	93%	0.18%	-37.18 dB	20 pF	5	3.80	7.06	4.68	3.00	5.38	14
171F	750	70.07 μ A	95%	0.24%	-32.27 dB	20 pF	7	4.40	8.70	5.39	3.50	6.78	30
171G	1000	70.58 μ A	95%	0.109%	-35 dB	40 pF	10	5.28	7.75	6.38	4.25	4.38	34.5

Data subject to change without notice

© 2017. Hammond Manufacturing Ltd. All rights reserved.