# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

HEAVYCON female insert, B24 series, 24-pos., screw connection, numbering 25 ... 48





#### Key Commercial Data

Packing unit	1 pc
GTIN	4 017918 036768
Weight per Piece (excluding packing)	150.32 g
Custom tariff number	85366990
Country of origin	Germany

#### Technical data

#### General

Note	For HEAVYCON-ADVANCE housing of B24 type and HEAVYCON housing of B24/B48 type
Connection method	Screw connection
Tightening torque	0.5 Nm
Pollution degree	3
Overvoltage category	III
Constructional and testing regulations	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352
Number of positions	24+PE
Insertion/withdrawal cycles	≥ 500



#### Technical data

#### General

Туре	B24
Conductor cross section	0.5 mm <sup>2</sup> 2.5 mm <sup>2</sup> (Applies to stranded conductors with ferrules)
	0.5 mm <sup>2</sup> 4 mm <sup>2</sup> (PE screw)
Connection cross section AWG	20 14
	20 12 (PE screw)
Stripping length of the individual wire	7 mm
Connection	For housings of type B16/B32. Connectors may only be actuated when there is no load/voltage.
Ambient conditions	

Ambient temperature (operation)	-40 °C 125 °C (including heating up of contacts)

#### Material data

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	РА

#### **Electrical characteristics**

Rated voltage (III/3)	500 V
Rated surge voltage	6 kV
Rated current	16 A

#### Standards and Regulations

Connection in acc. with standard	CSA
Constructional and testing regulations	DIN VDE 0627/86
	DIN VDE 0110/02.79
	DIN VDE 0110-1/04.97
	IEC 60664-1, DIN IEC 60512
	IEC 60352
Flammability rating according to UL 94	V0

#### Classifications

#### eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424



#### Classifications

eCl@ss

eCl@ss 7.0	27440209
eCl@ss 8.0	27440205
eCl@ss 9.0	27440205

#### ETIM

ETIM 2.0	EC000438
ETIM 3.0	EC000438
ETIM 4.0	EC000438
ETIM 5.0	EC000438

#### UNSPSC

UNSPSC 6.01	30211923
UNSPSC 7.0901	39121522
UNSPSC 11	39121522
UNSPSC 12.01	39121522
UNSPSC 13.2	39121522

#### Approvals

Approvals

#### Approvals

CSA / UL Recognized / EAC

Ex Approvals

#### Approvals submitted

#### Approval details

csa 👀	
mm²/AWG/kcmil	20-13
Nominal current IN	16 A

12/15/2015 Page 3 / 5



#### Approvals


Nominal voltage UN	600 V

## UL Recognized 🔊

mm²/AWG/kcmil	18-12
Nominal current IN	15 A
Nominal voltage UN	600 V


EAC


#### Drawings

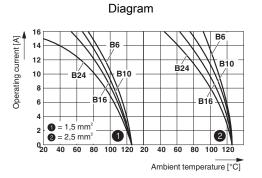

Derating diagram: Series HC-B...S / HC-B...C

#### Dimensional drawing






Female insert

#### Schematic diagram

25 0	O 37
26 〇	0 38
27 0	O 39
28 0	O 40
29 0	0 41
30 〇	0 42
31 0	0 43
32 0	0 44
33 O	O 45
34 0	046
35 0	0 47
36 〇	0 48

Connector pin assignment, connection side



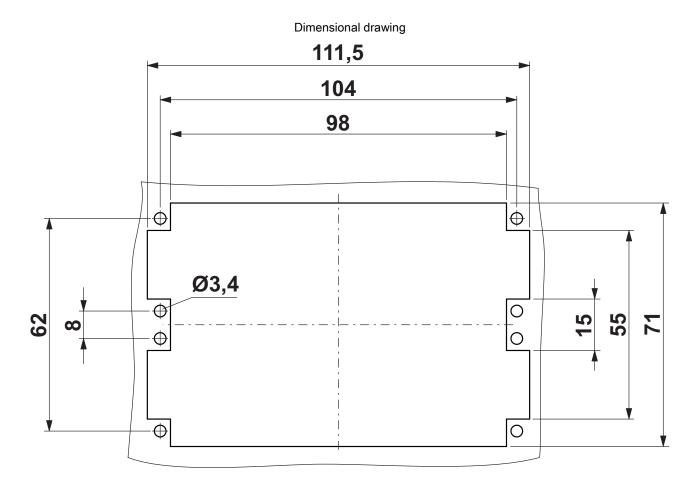

Panel cutout

Phoenix Contact 2015 © - all rights reserved http://www.phoenixcontact.com