



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



183a True RMS DMM with capacitance, low-pass filter, duty cycle, and temperature


Test the TPI advantage



- True RMS DMM
- Duty cycle (% pulse width modulation) for measuring modulating gas valves
- Low pass filter for noisy environments
- Separate fuse (2) and battery compartment
- IR serial interface that can be used to input data to PC with optional A183
- High resolution (0.01) low DC microamp range for measuring flame safety control circuit
- Frequency, capacitance, temperature, data hold, min/max record, relative mode
- AC/DC volts, AC/DC amps, resistance, audible continuity and diode test
- CAT II - 1000V
- CAT III - 600V
- cULus 61010-1
- 3 year limited warranty



- True RMS for more accurate measurements
- Duty cycle (% pulse width modulation) for measuring modulating gas valves
- Low pass filter for noisy environments
- Separate fuse and battery compartment
- IR serial interface

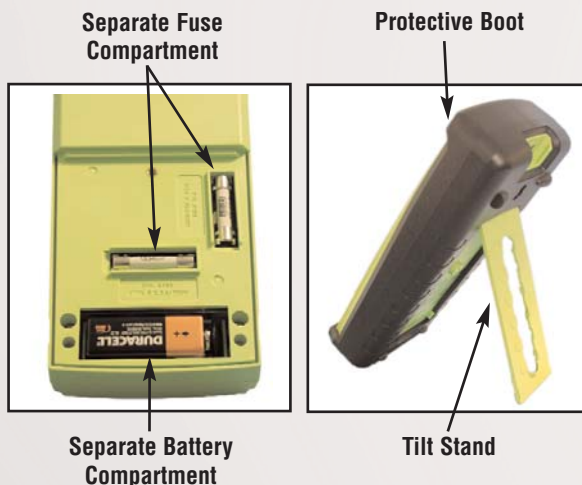

TPI 183A	
Range Selection	
Auto / Manual	•
Display Specifications	
4000 Count Display	•
Analog Bar Graph	•
Backlight	•
Basic Functions	
AC / DC Volts, AC / DC Amps	
Resistance, Diode Test	•
Audible Continuity	
Additional Functions	
True RMS, Frequency, Capacitance, Temperature	•
Duty Cycle (% of pulse width modulation (PWM))	
Data Hold	•
Min / Max Record	•
Relative Mode	•
Active Low Pass Filter Function	•
PC Output	•
Sleep Mode / Auto Off	•
Additional Features	
Frequency Check in Volt Mode	•
Closed Case Calibration	•
Separate Fuse / Battery Access	•
Protective Boot	•
Range & Resolution	
Basic DC Accuracy	0.5%
DC Voltage (maximum)	1000V
Input Impedance	10MΩ
Resolution (maximum)	0.01mV
AC Voltage (maximum)	750V
Input Impedance	10MΩ
Resolution (maximum)	0.01mV
DC Amps (maximum)	10A
Resolution (maximum)	0.01μA
AC Amps (maximum)	10A
Resolution (maximum)	0.1μA
Resistance (maximum)	40MΩ
Resolution (maximum)	0.1Ω
Frequency (maximum)	10MHz
Resolution (maximum)	0.01Hz
Temperature (maximum)	2372°F
Resolution (maximum)	0.1°F
Capacitance (maximum)	4000μF
Resolution (maximum)	0.01nF
Duty Cycle	0.1 to 99.9%
Agency Approval	
CE IEC 61010	CAT II 1000V / CAT III 600V /
cULus 61010	•
List Price	\$159.95



4000 count display with analog bargraph and backlight

RANGE:
Select between auto and manual ranging

REC:
Display the minimum and maximum reading being measured

FUNCTION:
Use to select between multiple functions at each selector position

RESISTANCE, CONTINUITY BUZZER, DIODE TEST

AC VOLTS:
Measure AC voltage, frequency, and duty cycle

PC OUTPUT:
Isolated optical to USB output (Optional A183 cable & software required)

Hz / DUTY:
Select between frequency and duty cycle while measuring AC volts

REL:
Display measured values relative to a stored value

HOLD / *:
Freezes measured values on the display / Activates the backlight

LPF:
Activates the low pass filter.

LOW DC MICROAMP RANGE:
High resolution (0.01uA) range for flame safety measurements

CAPACITANCE:
Test capacitors

TEMP:
Measure temperature (K-type thermocouple and banana adapter included)

- TPI 183A comes with:**
- A085** silicone test leads with alligator clips
 - A106** temperature input adapter
 - GK11M** beaded K-type temperature probe

**Photo is actual size
With Protective Boot
3.4" x 7.4" x 1.3"**