



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0936010237](#)
Status: **Active**
Overview: [GWconnect® Heavy Duty Connectors \(HDC\)](#)
Description: [GWconnect Crimp Contact Insert, Female, 10-Pole, 16A, for Crimp Contacts, Size 6B «44x27»](#)

Documents:

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

UL E249674

General

Product Family	Industrial Connectors / Enclosures
Series	93601
Component Size	6B «44x27»
Component Type	Inserts - Crimp Contact
Insert Series	S-EE
Overview	GWconnect® Heavy Duty Connectors (HDC)
Product Category	Heavy Duty Connectors
Product Name	GWconnect®
Standard	CSA C22.2 NO. 182.3, EN 60664-1, EN 61984, UL 1977
UPC	887191878454

Physical


Durability (mating cycles max)	500
Flammability	UL 94V-0
Gender	Female
Insert Color	Grey
Material - Insert	Polycarbonate
Net Weight	44.000/g
Number of Rows	4
Packaging Type	Bag
Polarized to Mating Part	Yes
Poles	10
Temperature Range - Operating	-40°C to +125°C

Electrical

Current - Maximum per Contact	16.0A
Voltage - Maximum	500V

Material Info

Engineering Number	7310.6090.0
--------------------	-------------

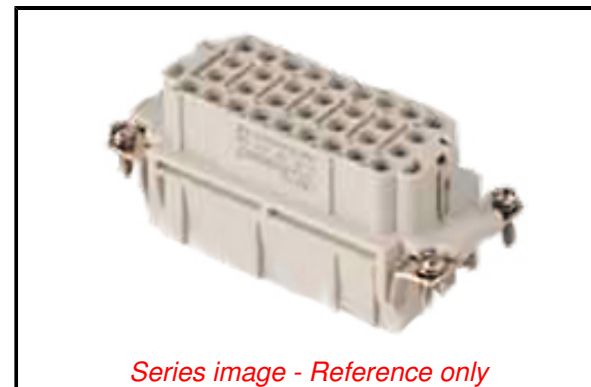

Series image - Reference only

EU ELV

Not Reviewed

EU RoHS

Not Reviewed

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Not Reviewed
ELV	Not Reviewed
RoHS Phthalates	Not Reviewed

Search Parts in this Series

[93601 Series](#)

Mates With

[93601-0244 Male Crimp Contact Insert](#)

Use With

Turned Contacts - Female