



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Wrist Strap Tester Installation, Operation and Maintenance



Made in the
United States of America



Figure 1. Desco [19240](#) Wrist Strap Tester

Description

Per [ANSI/ESD S20.20](#), test equipment is required to enact the Compliance Verification Plan Requirement. Test equipment shall be selected to make measurements of appropriate properties of the technical requirements that are incorporated into the ESD program plan. The Wrist Strap Tester can be used to fulfill ANSI/ESD S1.1, “The wrist strap system should be tested daily to ensure proper electrical value” (Annex A3). Being a portable battery powered tool, it is perfect for small labs or for a supervisor to spotcheck workers and/or ensure compliance.

The Wrist Strap Tester is a battery operated “on demand” wrist strap tester. When the wearer of a wrist strap plugs in their coil cord and touches the metallic surface of the Wrist Strap Tester, a path for current flow is completed from the wearer’s skin, through the wrist strap. This action will cause the green “test good” LED to illuminate as long as the resistance of the circuit path is between 750 kilohms and 10 megohms.

Packaging

- 1 Wrist Strap Tester
- 1 9V Alkaline Battery
- 1 Hook and Loop Fastener Strip
- 1 Certificate of Calibration

Installation

Open the Wrist Strap Tester’s battery compartment and install the included 9V battery. Use the included hook and loop fastener strip to mount the tester to a wall or worksurface.

NOTE: The low battery indicator flashes briefly every time the unit is used. Replace the battery once the indicator becomes constant during testing.

Operation

1. Fit the wristband snugly onto your wrist.
2. Snap the wrist cord to the wristband.
3. Plug the wrist cord into the Wrist Strap Tester.
4. Push and hold the test button until the test results are displayed.
5. An audible alarm will sound if the test fails. Verify that your wrist strap is being worn correctly or needs to be replaced. If your test result fails high, try applying an approved dissipative hand lotion such as [Menda Reztore™ ESD Hand Lotion](#) to your wrist.

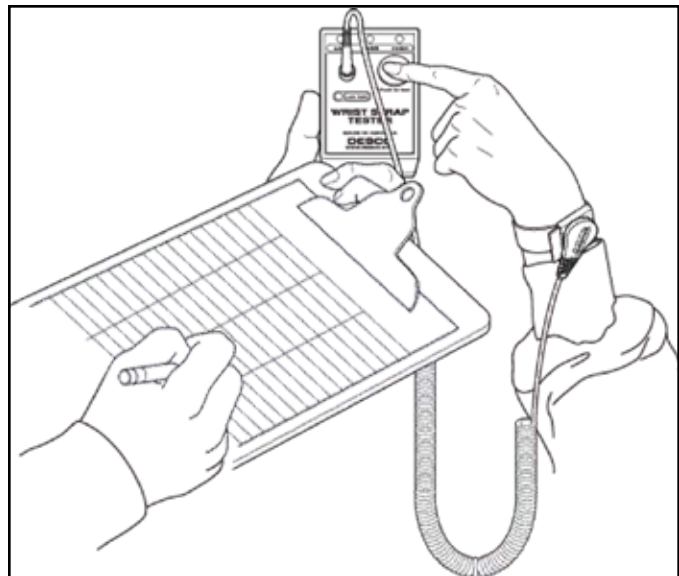


Figure 2. Using the Wrist Strap Tester and recording results

Calibration

The Desco Wrist Strap Tester is calibrated to NIST traceable standards. There are no user adjustments necessary. We recommend that calibration be performed annually using the Desco [07010](#) Calibration Unit. It is a convenient product which allows the customer to perform NIST traceable calibration on single-wire personnel testers. The [07010](#) is designed to be used on the shop floor at the workstation, virtually eliminating downtime, verifying that the continuous monitor is operating within tolerances.

View technical bulletin [TB-2039](#) for more information on the [07010](#) Calibration Unit and instructions to calibrate the Wrist Strap Tester.



Figure 3. Desco [07010](#) Calibration Unit

Specifications

Power Supply	9V Alkaline Battery
Operating Temperature	32°F - 104°F (0 - 40°C)
Test Limits	750 kilohms - 10 megohms
Test Voltage	4 VDC
Dimensions	3.6" x 2.6" x 1.1"
Weight	4 oz

Limited Warranty

Desco expressly warrants that for a period of one (1) year from the date of purchase Desco Wrist Strap Testers will be free of defects in material (parts) and workmanship (labor). Within the warranty period, a credit for purchase of replacement Desco Wrist Strap Testers, or, at Desco's option, the Wrist Strap Tester will be repaired or replaced free of charge. If product credit is issued, the amount will be calculated by multiplying the unused portion of the expected one year life times the original unit purchase price. Call our Customer Service Department at 909-627-8178 (Chino, CA) or 781-821-8370 (Canton, MA) for a Return Material Authorization (RMA) and proper shipping instructions and address. Please include a copy of your original packing slip, invoice, or other proof of date of purchase. Any unit under warranty should be shipped prepaid to the Desco factory. Warranty replacements will take approximately two weeks.

If your unit is out of warranty, call our Customer Service Department at 909-627-8178 (Chino, CA) or 781-821-8370 (Canton, MA) for a Return Material Authorization (RMA) and proper shipping instructions and address. Desco will quote repair charges necessary to bring your unit up to factory standards.

Warranty Exclusions

THE FOREGOING EXPRESS WARRANTY IS MADE IN LIEU OF ALL OTHER PRODUCT WARRANTIES, EXPRESSED AND IMPLIED, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE WHICH ARE SPECIFICALLY DISCLAIMED. The express warranty will not apply to defects or damage due to accidents, neglect, misuse, alterations, operator error, or failure to properly maintain, clean or repair products.

Limit of Liability

In no event will Desco or any seller be responsible or liable for any injury, loss or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, users shall determine the suitability of the product for their intended use, and users assume all risk and liability whatsoever in connection therewith.