



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# BL2500 Coyote™

*Ethernet-Enabled Single-Board Computer*  
**OEM Volume Version \$69\* w/o Ethernet**

The BL2500 Coyote single-board computer gives OEM designers extremely low-cost embedded control for high-volume applications such as product control, factory equipment control, access control, HVAC, and vending machines. Two standard models—one with Ethernet, one without—feature the Rabbit 3000™ microprocessor at 29.4 MHz, with 256K Flash and 128K SRAM (standard).

Customized BL2500 models (OEM2500 versions) can be manufactured to user-specified configurations in volumes  $\geq 500$ . Customization helps OEMs realize an extremely low-cost, yet maintain a reliable and rugged industrial solution. Our pin-compatible RabbitCore modules provide multiple configurations on the BL2500 Coyote, including Ethernet, non-Ethernet, and memory options.

## On-Board Features

The Coyote's compact board size of 3.95"  $\times$  3.95" (100  $\times$  100 mm) is easily mountable in standard 100 mm DIN rail trays. External connections via polarized locking industry-standard Molex®-type connectors enable rapid assembly with wire harnesses. These connectors also provide dependable cable harness connectivity to I/O. Future expansion boards (including A/D, D/A, digital I/O, and keypad/display) will interface via the two multiplexed SPI RS-422 ports.

The Coyote provides 24 rugged digital I/O (plus 1 A/D input and 2 D/A outputs) along with 4 LEDs (3 yellow and 1 extra bright red). The 8 industrialized open-collector sinking outputs can easily switch up to 200 mA of inductive loads such as relays and solenoids with protection from inductive kickback. Of the 16 digital inputs, 15 are fully protected to  $\pm 36$  V.


Six serial ports are included to support external communication. Two ports are connected to standard full-duplex RS-232 circuitry. One port is connected to rugged RS-485 differential pair signaling circuitry—allowing for industry standard multi-drop RS-485 networks. One port, designed to allow serial expansion, is multiplexed through two very high-speed (>1Mbit/sec capability) SPI ports with each line going through RS-422 differential pair signaling. The SPI ports connect to RJ-45 connectors (accepting standard category 5 cabling) for ease of connectivity. One serial port is a 3.3 V CMOS-level port that can either be asynchronous or clocked and one CMOS-compatible serial port is dedicated to programming/debugging.

The optional Ethernet interface (10 Mbps or 10/100 Mbps) allows easy connection to local networks or the Internet. Powerful software allows TCP/IP communication including e-mail and serving of web pages. Remote program development and loading via a network or the Internet is supported using appropriate accessory hardware.

## Programming the Coyote

Programs are developed and debugged using Z-World's industry-proven Dynamic C® software, which runs on a Windows PC. Interfacing from the PC hosting Dynamic C to the target BL2500 board can be accomplished by a serial cable, a USB cable, or via Ethernet. Comprehensive debugging support includes break points, watch expressions and many other extensive features oriented toward real-time embedded systems programming. An extensive library of drivers and sample programs is provided, including a royalty-free TCP/IP stack for network and Internet communications.

Full source code is provided for most library routines.

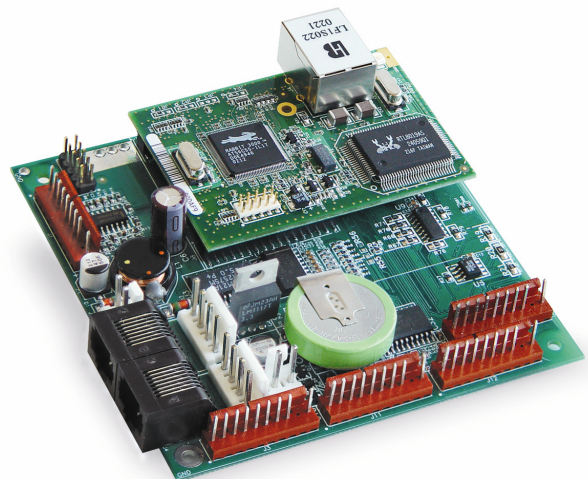

**BL2500**

## BL2500 Features

- Rabbit 3000™ processor core modules
- With or without 10Base-T Ethernet
- Molex-type connectors for industry standard wire harness connectivity
- 16 digital inputs
- 8 digital high-current sinking outputs with rugged protection diodes
- Two 9-bit PWM analog output channels
- One 8-bit A/D analog input channel
- 6 serial ports (2 RS-232, RS-485, RS-422, 2 CMOS)
- 4 user-configurable LEDs
- 1000 mA-h backup battery for RTC (time/date clock) and SRAM
- Standard options:
  - 10/100Base-T Ethernet
  - Higher Memory Versions

## OEM2500 Options


(Available for quantities  $\geq 500$ )

- A variety of core modules with or without Ethernet—10Base-T or 10/100Base-T
- Higher memory versions
- Addition/removal of any or all of the following sub circuits for performance/lower cost:
  - 2 serial expansion SPI RS-422 ports
  - Battery
  - RS-485
  - RS-232
  - 16 inputs
  - 8 outputs
  - 2 D/A + 1 A/D
  - 4 LEDs
- User Specified Options: Contact Sales Representative


## Development Kit

The BL2500/OEM2500 Development Kit contains all the software and hardware tools needed to begin design, including BL2500 model, demonstration board, Dynamic C SE development software and documentation on CD-ROM, User's Manual with schematics, serial cable for programming and debugging, AC adapter (US/Canada only), and Molex®-style crimp pins & housings (standard crimping tool sold separately).


Dynamic C is a registered trademark of Z-World, Inc. Rabbit & Rabbit 3000 are trademarks of Rabbit Semiconductor, Inc. Molex is a registered trademark of Molex, Inc.

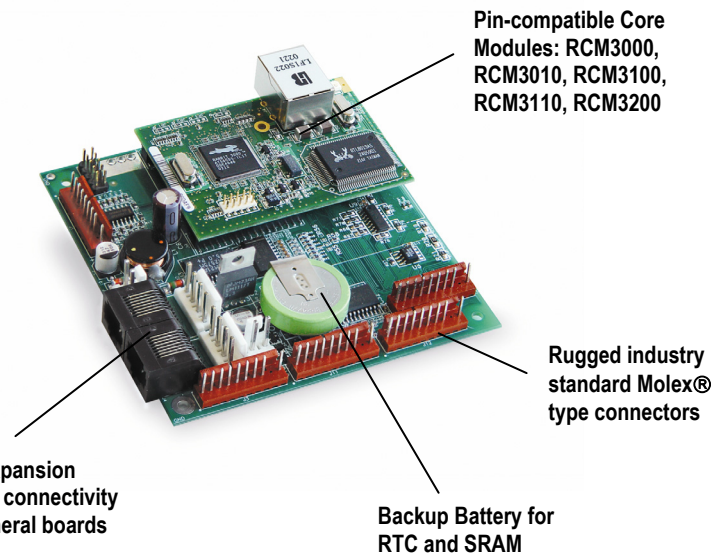

**\*Example - OEM2510: RCM3110 (non-Ethernet Core), remove 8 inputs, remove backup battery, and remove serial expansion SPI RS-422 ports = \$69 each (qty. 500)**



**\*\*Example - OEM2500: RCM3010 (10Base-T Ethernet Core), remove 8 inputs, remove backup battery, and remove serial expansion SPI RS-422 ports = \$99 each (qty. 500)**



## BL2500 Specifications & Features

FEATURE	BL2500	BL2510	OEM2500**	OEM2510*
<b>Microprocessor</b>	Rabbit 3000 at 29.4 MHz			
<b>Ethernet Port</b>	10Base-T, RJ-45 (standard)	None	10Base-T, RJ-45 (standard)	None
<b>Flash Memory</b>	256K (standard)			
<b>SRAM</b>	128K (standard)			
<b>LEDs</b>	4, user-programmable			
<b>Digital Inputs</b>	16: 15 protected to $\pm 36$ V DC, 1 protected to +5 -36V; threshold is 1.5 V nom.		8 protected to $\pm 36$ V DC, threshold is 1.5 V nom.	
<b>Digital Outputs</b>	8, sink up to 200 mA each, 36 V DC max. standoff voltage			
<b>Analog Inputs</b>	One 10-bit resolution, 8-bit accuracy, input range 0.1-3.1 V, 10 samples/s			
<b>Analog Outputs</b>	Two 9-bit PWM, 0.1-3.1 V DC, 17ms settling time			
<b>Serial Ports</b>	<b>6 serial ports:</b> <ul style="list-style-type: none"> <li>• 1 RS-485</li> <li>• 2 RS-232 or one RS-232 (with CTS/RTS)</li> <li>• 1 CMOS level asynchronous or clocked serial port</li> <li>• 1 expansion serial port multiplexed to two RS-422 clocked SPI ports</li> <li>• 1 CMOS compatible serial port for programming/debug</li> </ul>		<b>5 serial ports:</b> <ul style="list-style-type: none"> <li>• 1 RS-485</li> <li>• 2 RS-232 or one RS-232 (with CTS/RTS)</li> <li>• 1 CMOS level asynchronous or clocked serial port</li> <li>• 1 CMOS compatible serial port for programming/debug</li> </ul>	
<b>Serial Rate</b>	Max. async = CLK/8, Max. sync = CLK/2			
<b>Real-Time Clock</b>	Yes			
<b>Timers</b>	Ten 8-bit timers (6 cascadable from the first) and one 10-bit timer with 2 match registers			
<b>Watchdog/Supervisor</b>	Yes			
<b>Power</b>	8 - 40 V DC 1 W typical w/ no load	8 - 40 V DC 0.8 W typical w/ no load	8 - 40 V DC 1 W typical w/ no load	8 - 40 V DC 0.8 W typical w/ no load
<b>Backup Battery</b>	3 V lithium coin-type, 1000 mA-h, supports RTC & SRAM		None	
<b>Operating Temperature</b>	-40° to +70°C			
<b>Humidity</b>	5 - 95%, noncondensing			
<b>Connectors</b>	5 polarized 9-pin Molex®-type terminals with 0.1" pitch, Two 4-pin 0.156" pitch Molex-type, two 0.156" pitch 2-pin Molex-type, two RJ-45, one 0.1" pitch 2x5 IDC, one 2 mm pitch 2x5 IDC programming port		4 polarized 9-pin Molex® type terminals with 0.1" pitch, two 0.156" pitch 2-pin Molex-type, one .1" pitch 2x5 IDC, one 2 mm pitch 2x5 IDC programming port	
<b>Board Size</b>	3.94" x 3.94" x 1.16" (100 x 100 x 29 mm)	3.94" x 3.94" x 0.80" (100 x 100 x 20 mm)	3.94" x 3.94" x 1.16" (100 x 100 x 29 mm)	3.94" x 3.94" x 0.80" (100 x 100 x 20 mm)
<b>Pricing</b>	\$189/155 (qty. 1/100)	\$149/122 (qty. 1/100)	**\$99/94 (qty. 500/1000)	*\$69/64 (qty. 500/1000)
Part Number	101-0575	101-0576	101-0605	101-0606
<b>Development Kit</b>	\$299			
Part Number	U.S. 101-0577		Int'l 101-0578	

## Options

Standard Options	BL2500 Pricing (qty. 1/100)	BL2510 Pricing (qty. 1/100)	OEM2500 Pricing (qty. 500/1000)	OEM2510 Pricing (qty. 500/1000)
BL25XX with: 10/100Base-T, 512K Flash, 512K SRAM (program) + 256K SRAM (data), Rabbit 3000™ @ 44.2 MHz Part Number	\$239/195 101-0602	N/A	\$145/135 101-0609	N/A
BL25XX with: 512K Flash / 512K SRAM Part Number	\$209/171 101-0599	\$179/147 101-0600	\$129/119 101-0607	\$99/89 101-0608
<b>User-Specified Options</b>	N/A		Contact Sales Representative	

## OEM2500 Customization Checklist

**Complete form and fax for custom quote or complete online at:  
www.zworld.com/products/oem2500/custom.shtml**

### FEATURE

**Ethernet/Memory**

- |  |   |   |
|--|---|---|
| <input type="checkbox"/> 10/100Base-T (44.2 MHz clock, 512K Flash, 512K program + 256K data SRAM) <sup>(100)</sup> | <input type="checkbox"/> 10Base-T, 512K Flash / 512K SRAM <sup>(80)</sup> | <input type="checkbox"/> 10Base-T, 256K Flash / 128K SRAM <sup>(40)</sup> |
| <input type="checkbox"/> No Ethernet, 512K Flash / 512K SRAM <sup>(40)</sup>                                       | <input type="checkbox"/> No Ethernet, 256K Flash / 128K SRAM              |   |

**Serial Ports:**

RS-485  Yes <sup>(5)</sup>  No

RS-232  Yes <sup>(5)</sup>  No

Digital Inputs  16 (15 protected) <sup>(8)</sup>  8 (8 protected) <sup>(4)</sup>  No Inputs

Digital Outputs  8 Outputs <sup>(6)</sup>  No Outputs

Analog I/O  1 Input / 2 Outputs <sup>(3)</sup>  No Analog I/O

Expansion  RabbitNet™ expansion port multiplexed to 2 RS-422 clocked SPI ports <sup>(10)</sup>  No RabbitNet

Backup Battery (1000 mA-h)  Yes <sup>(8)</sup>  No

LEDs  4 LEDs <sup>(1)</sup>  No LEDs

Quantity Required  500 - 999  1000 - 4999  5000 +

Other User Specification:

---



---



---

In the checklist above, the numbers in parentheses denote the relative worth of the circuits listed. This will aid a designer in judging which circuits to use for an OEM version. Example: LEDs are given the lowest relative value = 1. Actual OEM prices will vary depending upon the particular combination of circuits and also upon the volume. Contact a sales representative for actual price quote and lead time.

Name:	
Company:	
Address:	
City:	State:
Country:	Zip/Postal Code:
Phone Number:	
Fax Number:	
Email:	

**Fax completed form to Z-World Sales at 530.757.3792**