



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





INTELLIGENT I/O
EXPANSION CHIP



RABBIT RIO®

The Rabbit RIO chip is an intelligent I/O processor ideally equipped for industrial automation and control

The Rabbit RIO chip offers both I/O expansion and peripheral features that easily integrate into new or existing designs. It interfaces to any microcontroller with an available SPI or parallel port. Multiple peripheral features offer a distinct advantage for motor control applications. The Rabbit RIO simply takes the load off the processor, making it ideal for applications with demanding networking requirements.


The Rabbit RIO is also ideal for machine control applications. I/Os are 5V tolerant, which also includes pin-pair protection for applications such as H-bridge drivers. Since multiple status bits are set from a single match register, pins are easily

configurable for higher drive current operations. The same signal could be output on multiple pins for applications that require a higher current. It also provides push pull protection for sink and source drivers.

BENEFITS

- Easily interface to any CPU via an available SPI or parallel port
- Instantly add up to 32 digital I/O lines
- 8 independent functional channels with 4 ports each
- Functional channels configurable as: Bi-directional I/O, PWM or PPM outputs, TRIAC signal generators, input capture, counter, Quadrature decode peripheral
- Add I/O and peripheral features to any new or existing design
- Use multiple Rabbit RIO devices for large I/O requirements

APPLICATION EXAMPLE

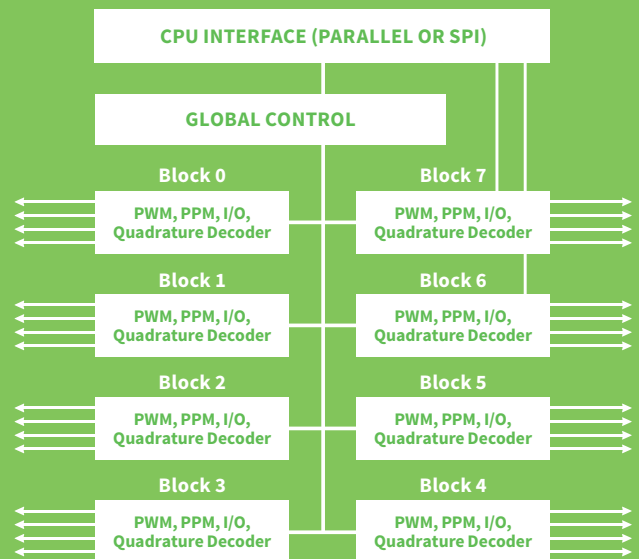

RELATED PRODUCTS



Rabbit® SBC
BL2100
Series



Rabbit® SBC
BL4S100
Series



Rabbit® SBC
BL4S200
Series



RabbitCore®
RCM3000
Series



Dynamic C®

SPECIFICATIONS

Rabbit RIO® Expansion Chip

FEATURES

CLOCK SPEED	Up to 40 MHz
OPERATING VOLTAGE	3.0-3.6VDC
MAXIMUM I/O INPUT VOLTAGE	5.0VDC (3.3VDC typ.)
CORE CURRENT	22 MHz @ 31.3 mA, 25° C
I/O RING	22 MHz @ 1.1 mA, 25° C
OUTPUT DRIVE	8 mA
CPU INTERFACES	SPI or 8-bit parallel
FIXED DIGITAL INPUTS	4
CONFIGURABLE I/O	8 independent channels, each with 4 ports: <ul style="list-style-type: none"> • Up to 32 bi-directional I/O lines • Up to 32 PWM outputs • Up to 16 PPM outputs • Up to 32 TRIAC signal generators • Up to 8 input capture peripherals • Up to 8 counters • Up to 8 quadrature decode peripherals
PACKAGE TYPE	64-pin TQFP 10 mm x 10 mm x 1.4 mm

RIO PROGRAMMABLE I/O APPLICATION KIT

APPLICATION KIT CONTENTS:

- RCM4110 module
- Rabbit RIO Prototyping Board
- Universal AC adapter, 12 V DC, 1 A.*
- 10-pin header to DB9 programming cable with integrated level-matching circuitry
- Plastic and metal standoffs with 4-40 screws
- A bag of jumpers and jumper wires for use on the Prototyping Board
- Rabbit® 4000 Processor Easy Reference poster



*Included only with Application Kits sold for the North American market. A header plug leading to bare leads is provided to allow overseas users to connect their own power supply with a DC output of 8-30 V.

PART NUMBERS

DESCRIPTION

101-1147	Rabbit RIO® Programmable I/O Application Kit
20-668-0030	Rio I/O chip
20-101-1187	Rio I/O chip (2 pack)

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001590
C1/915

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

