



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832




Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





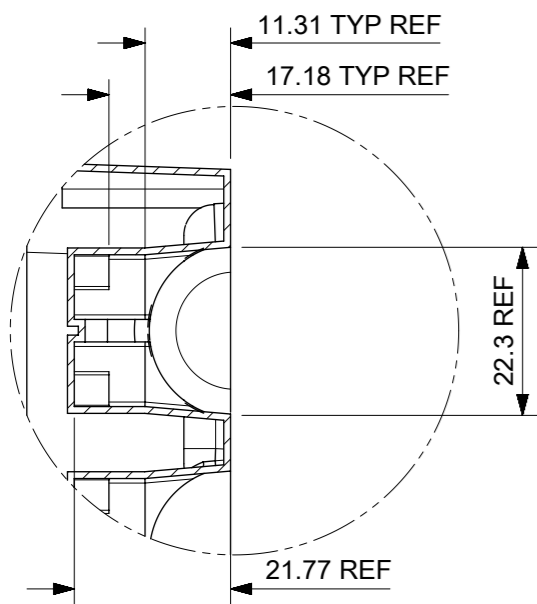

DETAIL B

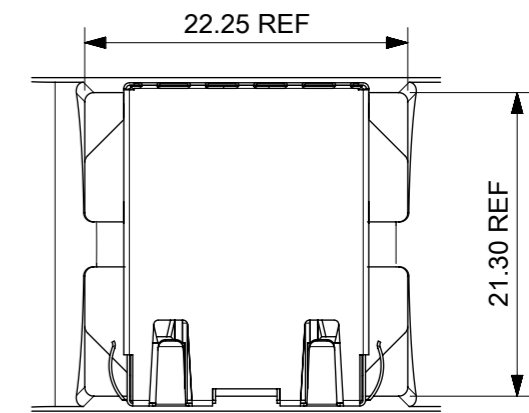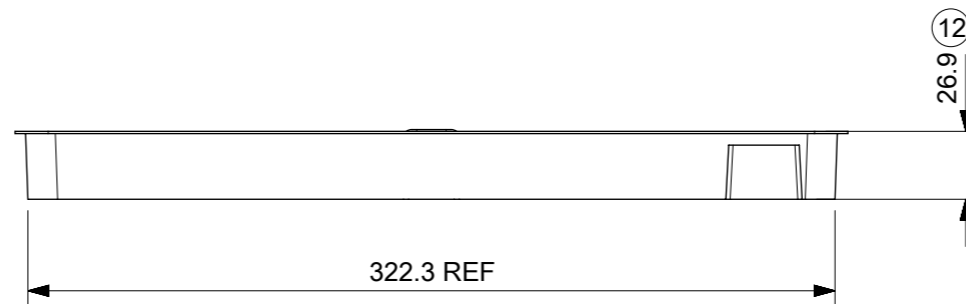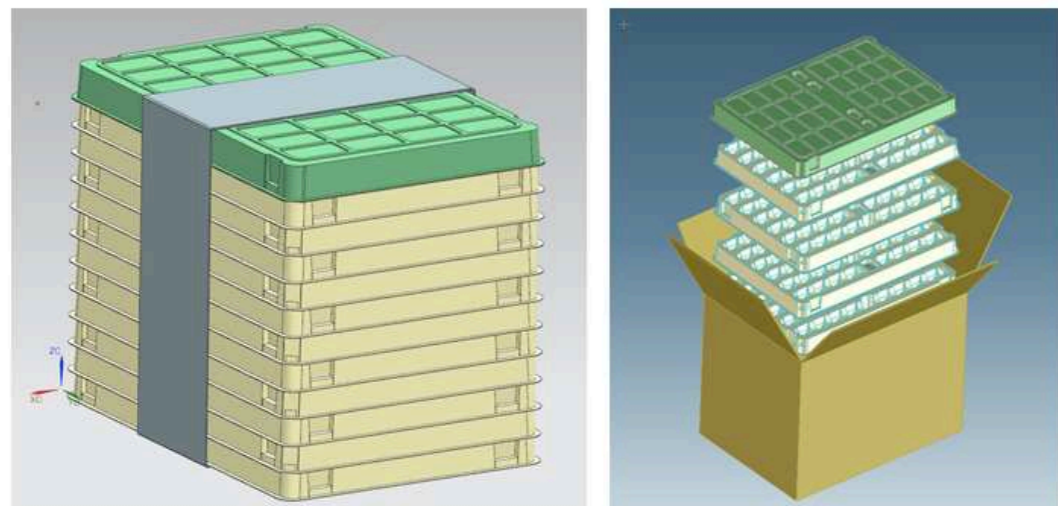

DETAIL C  
SCALE 2:1

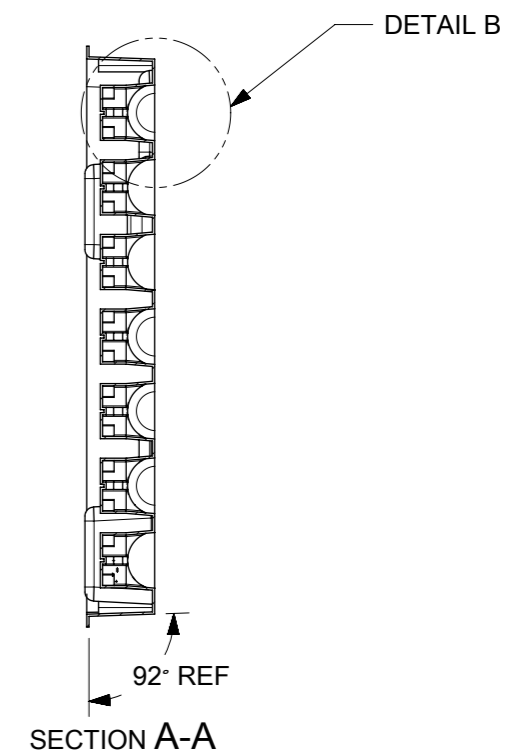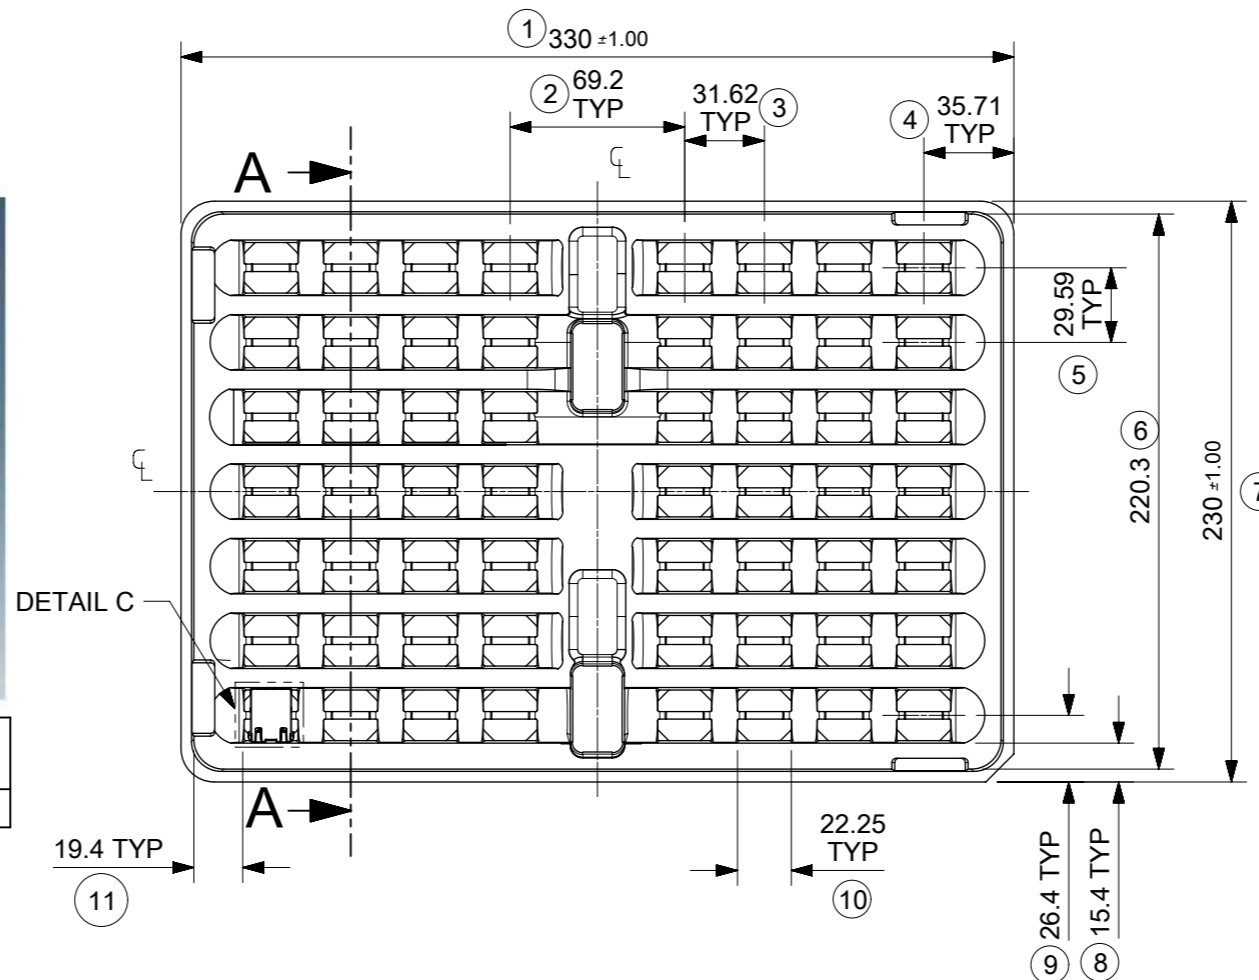

VERSION	QUANTITY PER TRAY	QUANTITY OF TRAYS PER BOX	QUANTITY PER BOX	QUANTITY PER PALLET
0.85" VERSION	56	12	672	18,144


NOTES:

- MATERIAL: PETA ANTISTATIC
- THICKNESS: 0.9mm ±0.05mm
- COLOUR: CLEAR
- BOW 2mm MAXIMUM PER 330mm
- TWIST 2mm MAXIMUM PER 330mm
- TRAY PART NO. AND RECYCLE LOGO TO BE CLEARLY MARKED ON TRAY  
RECYCLE LOGO SHOULD BE APPROPRIATE TO MATERIAL USED
- WHERE RELEVANT, DIMENSIONS SHOULD BE SYMMETRICAL ABOUT THE CENTRELINE
- GENERAL PROFILE TOLERANCE  $\overline{\cup}$  0.40 ON NON DIMENSIONED FEATURES





LAST INSPECTION NUMBER USED: 12

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
<b>QUALITY SYMBOLS</b> $\nabla_A$ = 0 $\nabla_E$ = 0 $\nabla_F$ = 0 $\nabla_G$ = 0 $\nabla_H$ = 0 $\nabla_I$ = 0 $\nabla_J$ = 0 $\nabla_K$ = 0 $\nabla_L$ = 0	ORIGINAL RELEASE EC NO: 109024 DRWN: DALLENO1 CHK'D: DALLENO1 APPR: STGRIFFIN		2016/10/04 2016/12/07 2016/12/07		GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 1.0 ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 0.2 1 PLACE ± 0.5 0 PLACES ±		DIMENSION UNITS: MM SCALE: 1:3		 MXMAG STANDARD AND INVERTED TRAY PRODUCT CUSTOMER DRAWING						
	DRWN BY: KREILLY DATE: 2016/05/06		CHK'D BY: [blank] DATE: [blank]		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE: A3 THIRD ANGLE PROJECTION					SERIES: 93462	MATERIAL NUMBER: 990250150		CUSTOMER: GENERAL MARKET
	APPR BY: [blank] DATE: [blank]		[blank]		[blank]		[blank]					DOCUMENT NUMBER: 934620003	DOC TYPE: PSD	DOC PART: K	SHEET NUMBER: 1 OF 1
	RELEASE STATUS: P1 RELEASE DATE: 07.12.2016 13:31:26		[blank]		[blank]		[blank]					[blank]	[blank]	[blank]	[blank]


INVERTED PROFILE MAGNETIC JACK  
GIGABIT ETHERNET W/SHIELD TABS

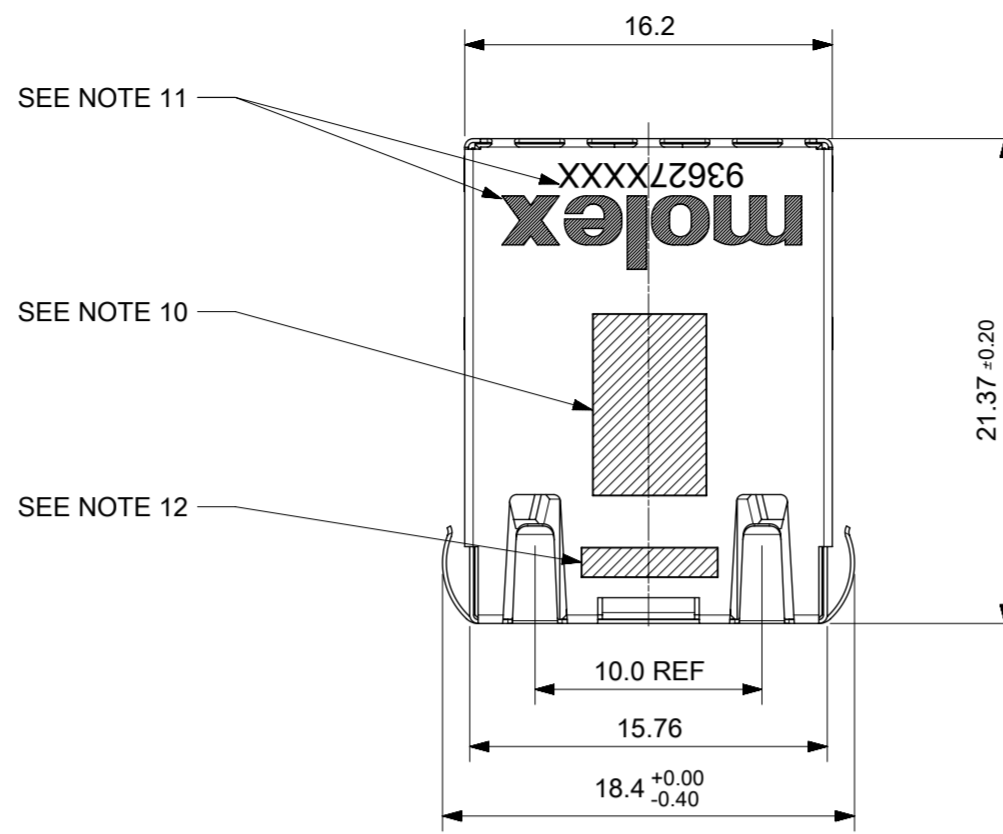


- NOTES:
- 1 - SHIELD MATERIAL: 0.17 mm THICK BRASS PRE-PLATED WITH NICKEL  
SOLDER TABS POST DIPPED WITH MIN 1.27 μm TIN
  - 2 - HOUSING MATERIAL: LCP, BLACK, UL 94V-0
  - 3 - TERMINALS MATERIAL: PHOSPHOR BRONZE  
RJ45 CONTACTS PLATING: BASE NICKEL PLATED WITH GOLD  
FLASH OVER PALLADIUM NICKEL. REFER TO 934620001 PSP  
PHY SOLDER TAILS: COPPER ALLOY
  - 4 - MATING INTERFACE ACCORDING TO IEC 60603-7 & TIA-1096-A
  - 5 - PRODUCT SPECIFICATION: 934620001 PSP
  - 6 - PACKAGING SPECIFICATION: 934620001 PSK - TRAY
  - 7 - STAND OFF TO SYSTEM BOARD 0.30 mm MIN
  - 8 - RECOMMENDED PCB THICKNESS: 1.57 mm
  - 9 - SHIELD: AVOID ROUTING TRACES  
OR PLACING ANY VIAS BELOW THESE AREAS
  - 10 - AREA FOR PICK AND PLACE: 5.0 mm X 8.0 mm
  - 11 - INSCRIPTION MARKED BY LASER:  
1st : MOLEX  
2nd : P/N (SEE BOM)
  - 12 - INSCRIPTION MARKED BY LASER:  
DATE CODE(DAY/WEEK/YEAR)
  - 13 - MATERIAL COMPLIANT TO RoHS DIRECTIVE 2002/95/EC

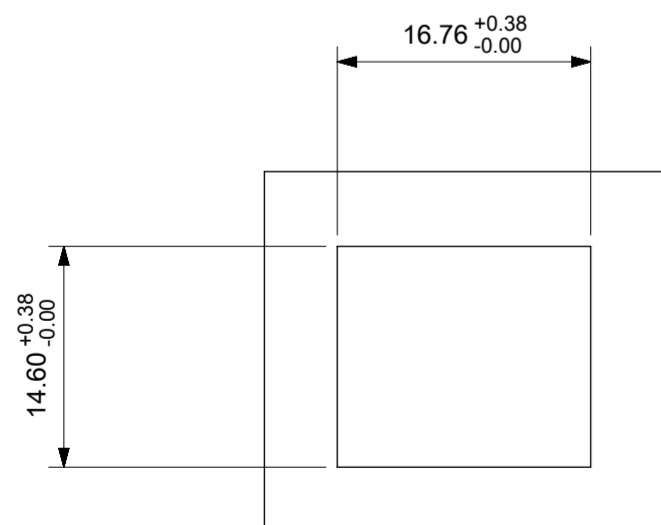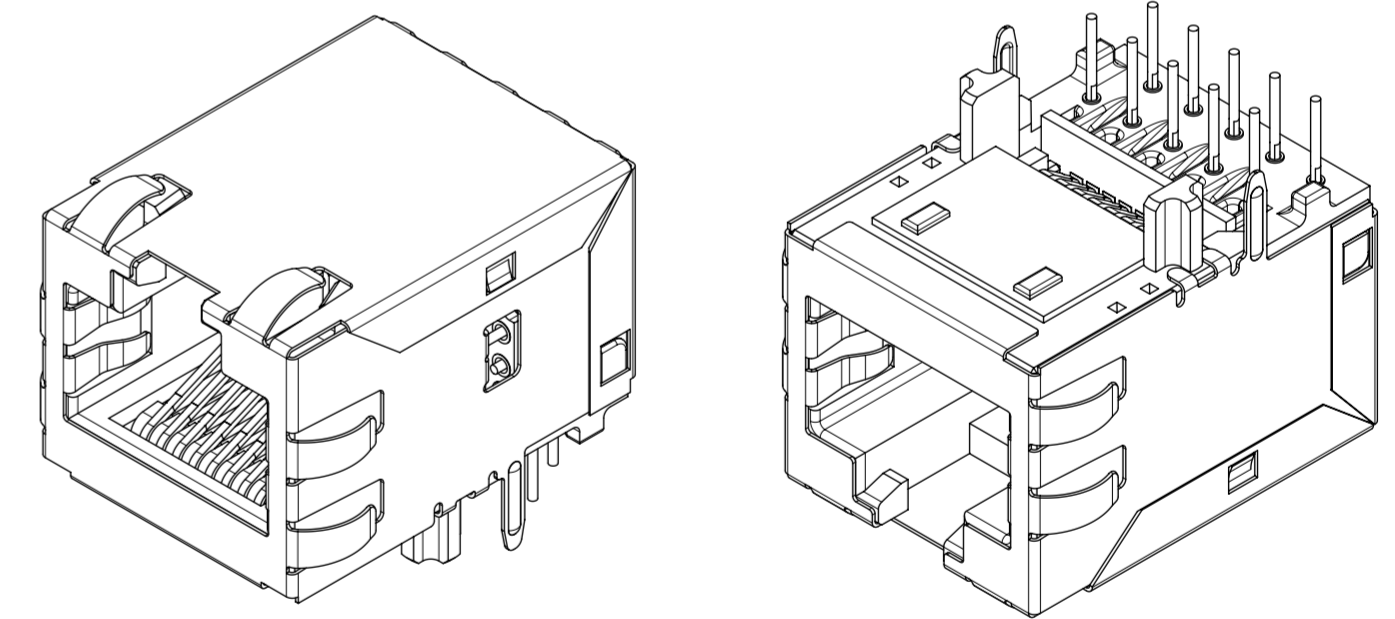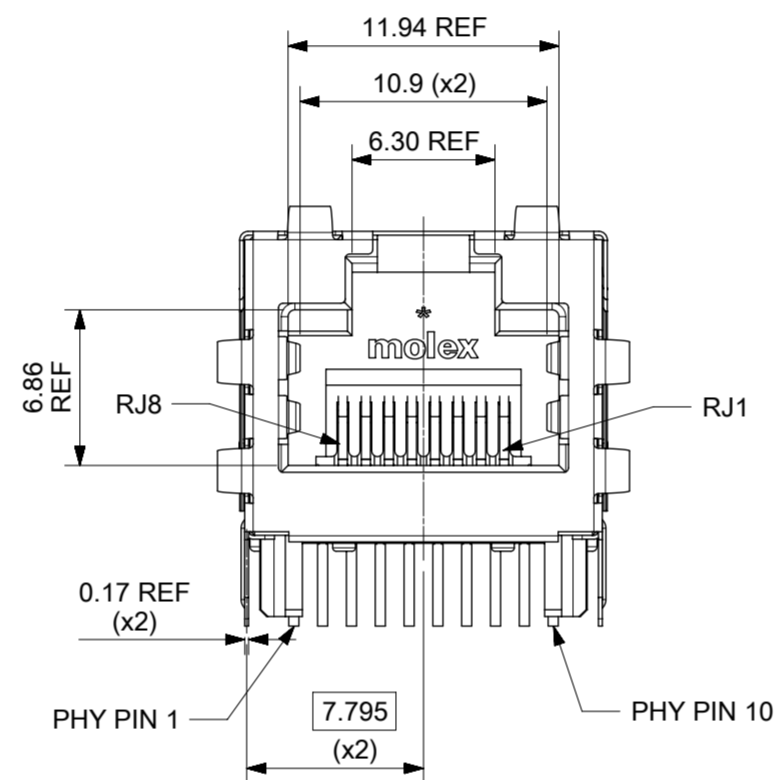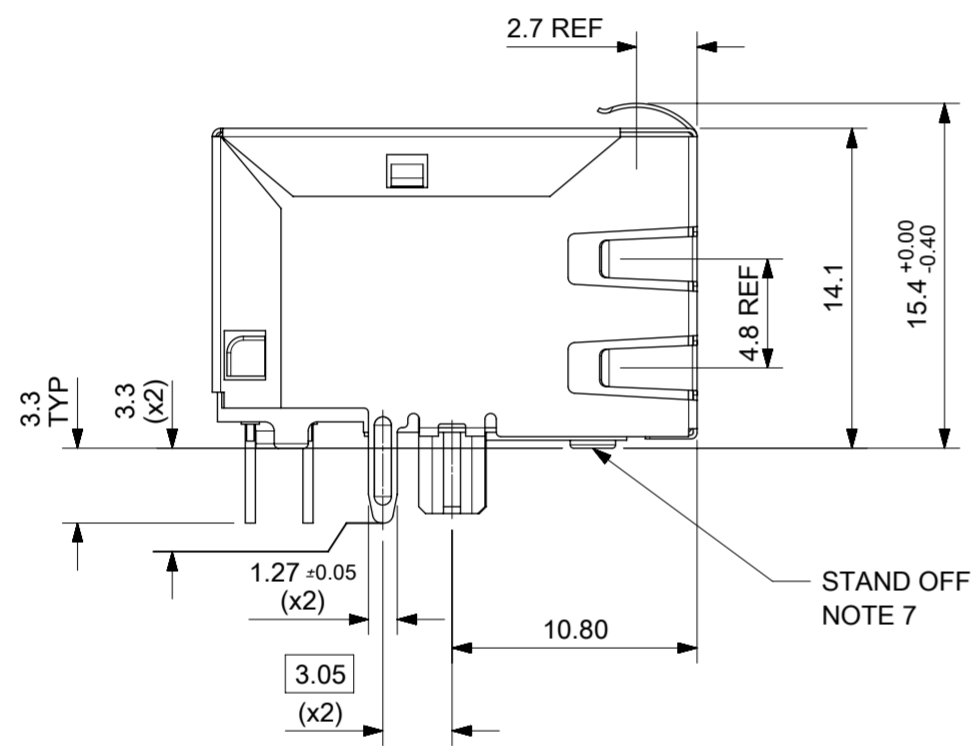


SUGGESTED PANEL CUT-OUT

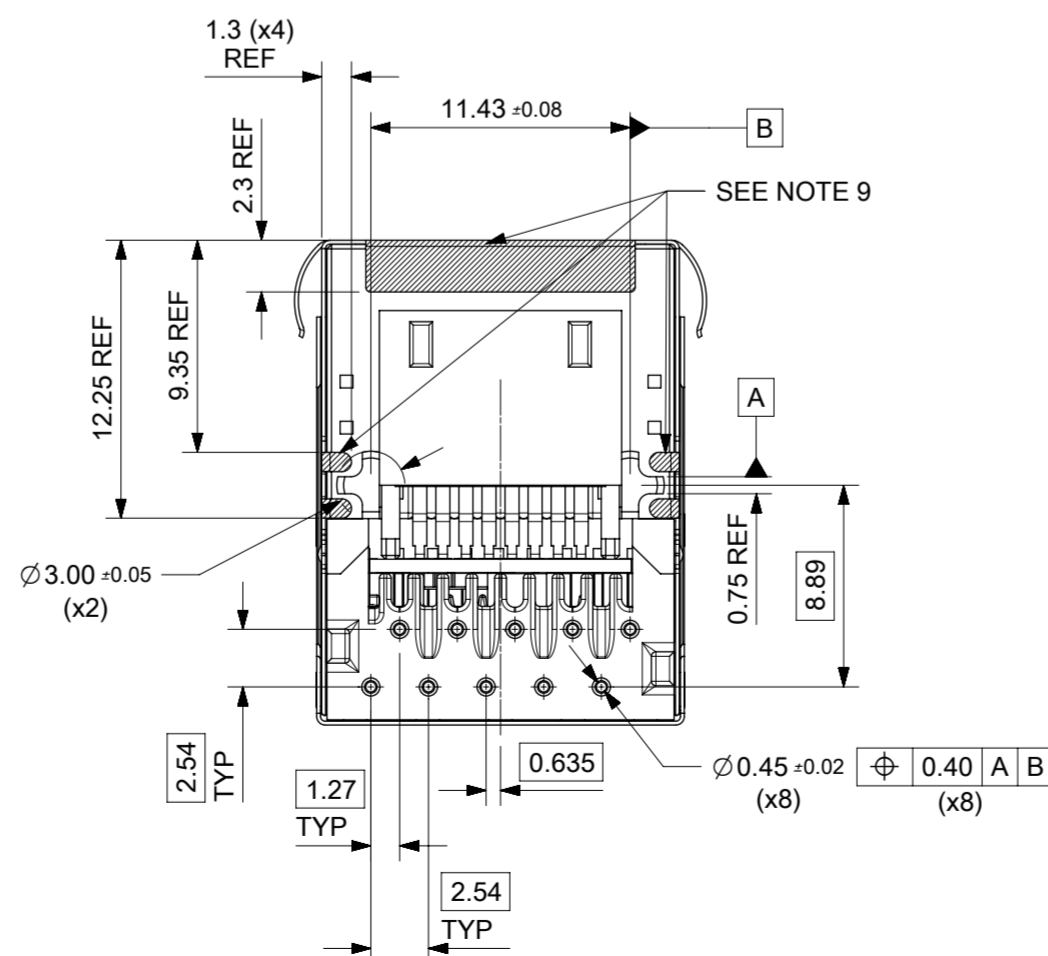

EC NO: 116686 DRWN: KREILLY CHKD: DSHEA REV: APPR: DBYRNES		2017/05/09 2017/09/12 2017/09/26	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 2.0 ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 0.1 1 PLACE ± 0.2 0 PLACES ± DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION UNITS: mm SCALE: 3:1 DRWN BY: JKEARNS DATE: 2015/11/05 CHKD BY: JKEARNS DATE: 2015/12/17 APPR BY: STGRIFFIN DATE: 2015/11/19	<b>molex</b> INV MX-MAG 8CORE GIG NO LED W/SHIELD TAB
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			PRODUCT CUSTOMER DRAWING		
SERIES: 93627 MATERIAL NUMBER: SEE TABLE ON SHEET 2 CUSTOMER: GENERAL MARKET		DOCUMENT NUMBER: 936270004 DOC TYPE: PSD DOC PART: 000 SHEET NUMBER: 1 OF 3			

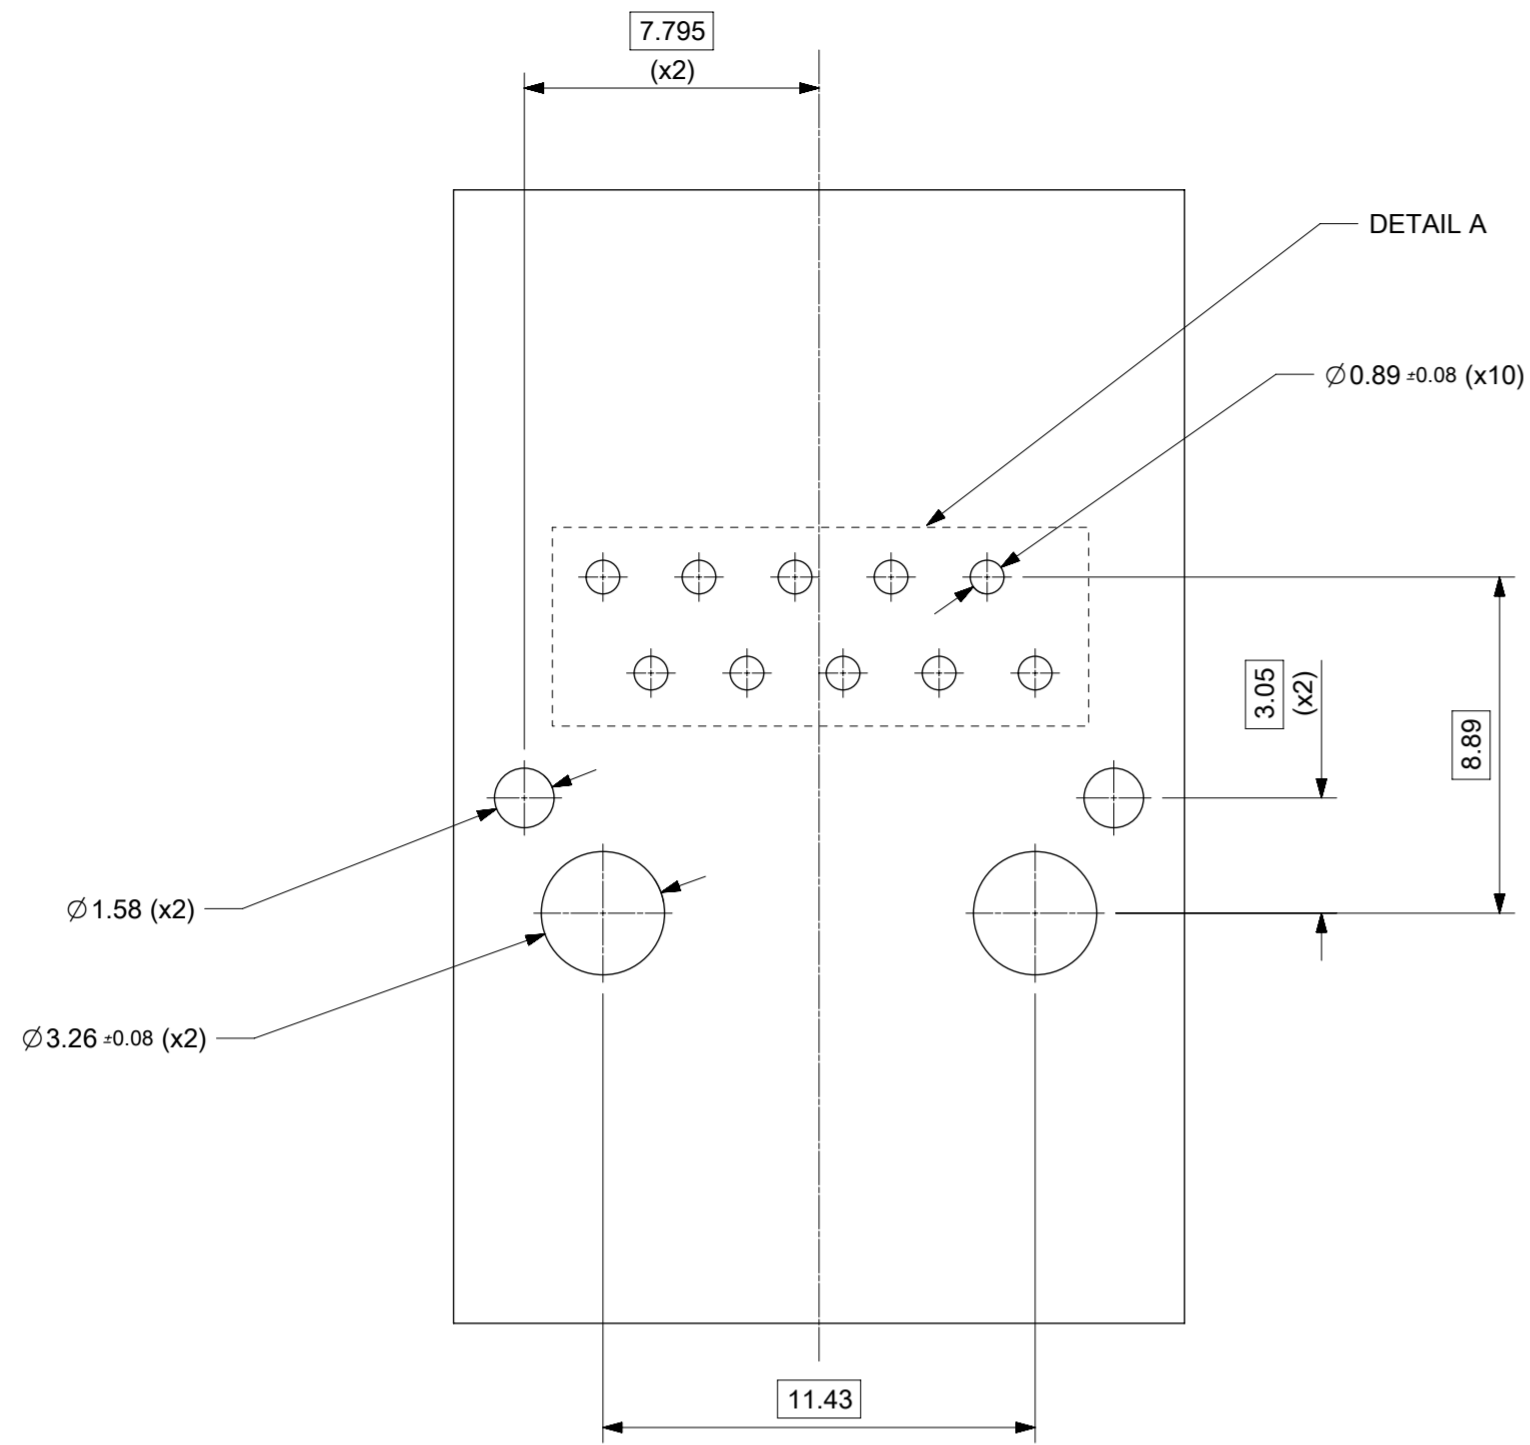

SUGGESTED BOARD LAYOUT  
GIGABIT VERSION  
COMPONENT SIDE  
ALL DIMS REFERENCE DIMS

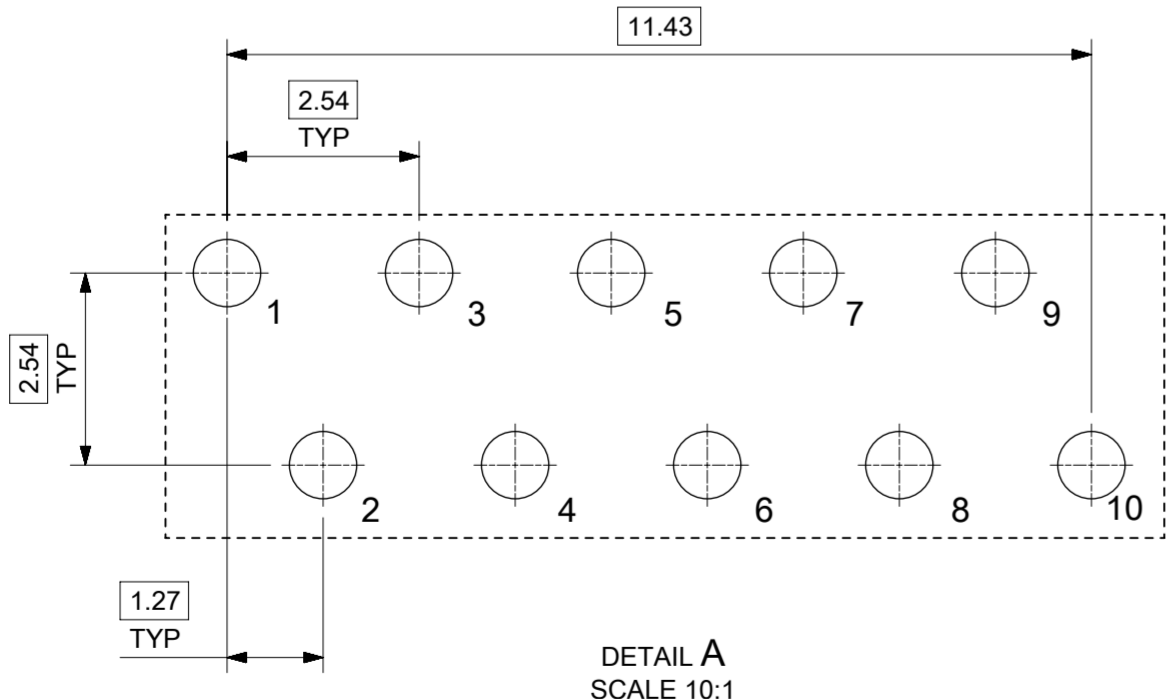


DETAIL A  
SCALE 10:1

PIN CONFIGURATION  
FOR GIGABIT VERSION

PART NUMBER	LEFT LED	RIGHT LED
93627-8020	N/A	N/A

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISED EC NO: 116686 DRWN: KREILLY CHKD: DSHEA REV / APPR: DBYRNES	2017/05/09	2017/09/12	2017/09/26	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION UNITS	SCALE		
				ANGULAR TOL ± 2.0 °	mm	5:1		
	4 PLACES ±	JKEARNS		DATE	2015/11/05		INV MX-MAG 8CORE GIG NO LED W/SHIELD TAB  PRODUCT CUSTOMER DRAWING	
	3 PLACES ±	JKEARNS		DATE	2015/12/17			
	2 PLACES ± 0.1	STGRIFFIN		DATE	2015/11/19			
1 PLACE ± 0.2	DRAWING SIZE		THIRD ANGLE PROJECTION	A2				
0 PLACES ±	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							
C	93627	SEE TABLE	GENERAL MARKET	DOCUMENT NUMBER 936270004		DOC TYPE PSD	DOC PART 000	SHEET NUMBER 2 OF 3

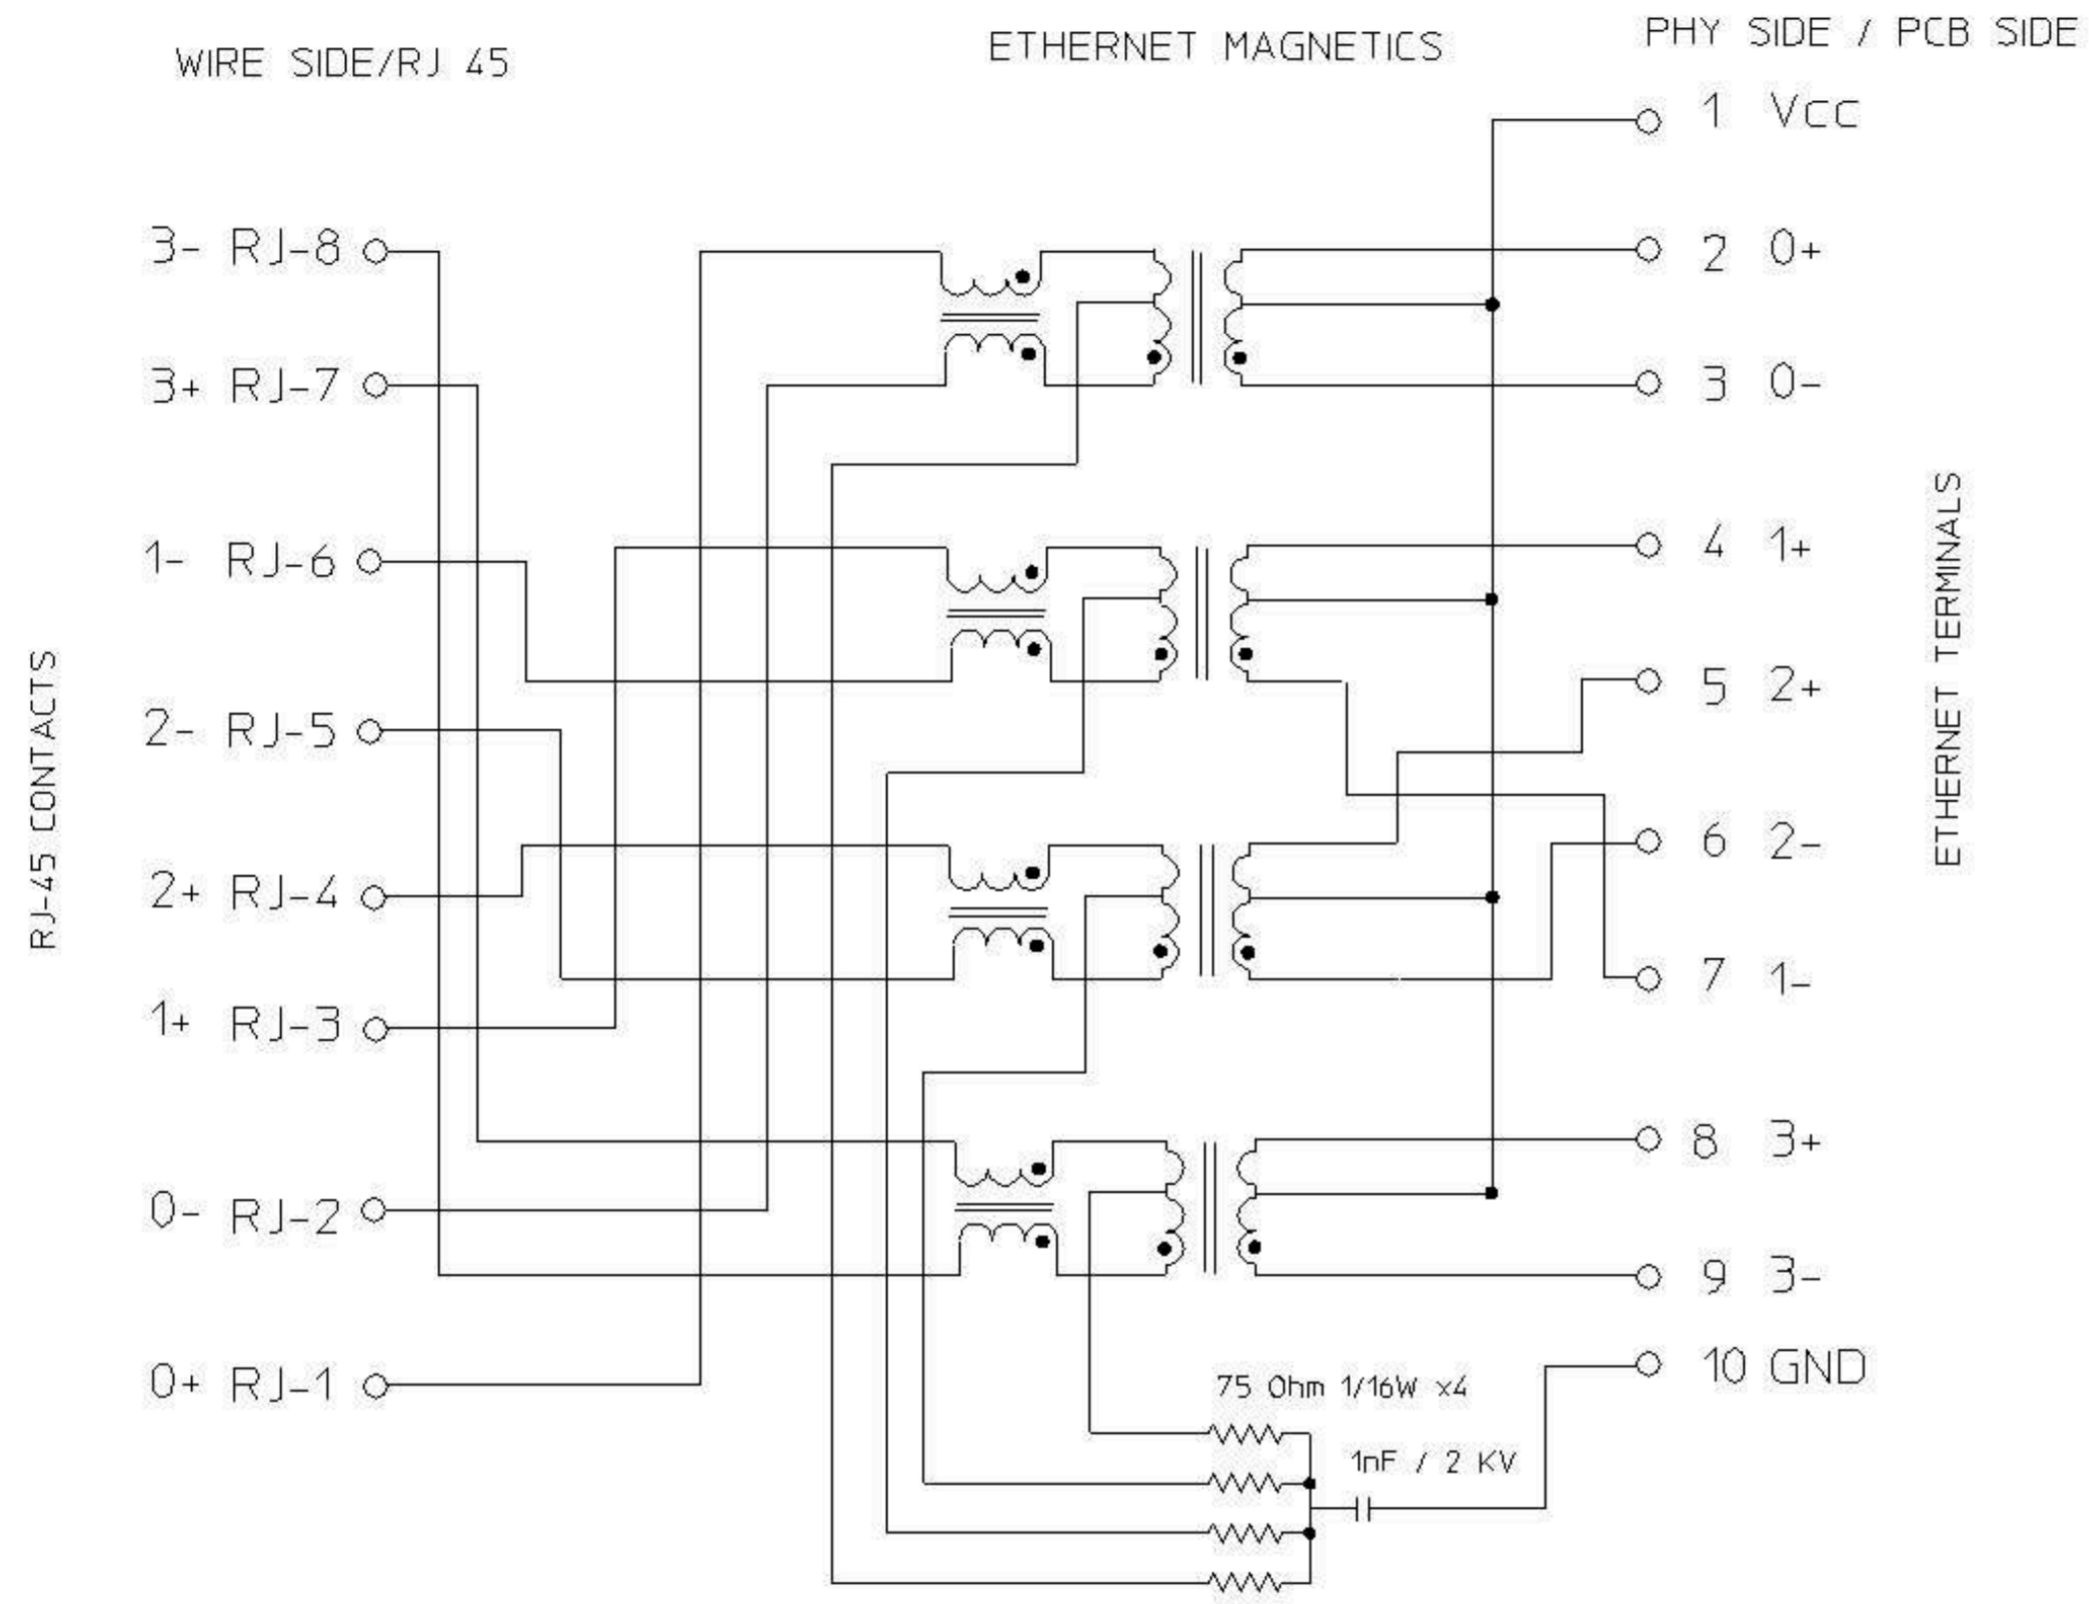

Description	Value	
OCL @ 100 kHz, 0.1 V 8 mA DC bias (-40°C to +85°C)	350 µH min.	
Turns ratio	1CT:1CT	
Transmission characteristics @ 25°C, all four pairs		
Insertion Loss		
Frequency f, (MHz)	Limits (dB max.)	Typical Values (dB max.)
1.0-9.9	0.4+0.1*log(f)	0.5 @ 10 MHz
10-49.9	0.5+0.3*log(f/10)	0.7 @ 50 MHz
50-79.9	1+1.4*log(f/80)	1.0 @ 80 MHz
80-100	1.3+3*log(f/100)	1.3 @ 100 MHz
Return Loss		
Frequency f, (MHz)	Limits (dB min.)	Typical Values (dB min.)
1.0-39.9	18	18 @ 40 MHz
40-100	12-20*log(f/80)	10 @ 100 MHz
CMR		
Frequency f, (MHz)	Limits (dB min.)	Typical Values (dB min.)
1.0-100	30	30 @ 100 MHz
Next		
Frequency f, (MHz)	Limits (dB min.)	Typical Values (dB min.)
1.0-39.9	35	35 @ 40 MHz
40-100	33-20*log(f/50)	27 @ 100 MHz
Isolation PHY to wire side	2.25 kVDC/60sec	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISED EC NO: 116686 DRWN: KREILLY CHKD: DSHEA REV APPR: DBYRNES	2017/05/09	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION UNITS	SCALE				
	2017/09/12	ANGULAR TOL ± 2.0 °	mm	1:1				
	2017/09/26	4 PLACES ±	DRWN BY	DATE		INV MX-MAG 8CORE GIG NO LED W/SHIELD TAB		
		3 PLACES ±	JKEARNS	2015/11/05				
		2 PLACES ± 0.1	CHKD BY	DATE		PRODUCT CUSTOMER DRAWING		
	1 PLACE ± 0.2	JKEARNS	2015/12/17					
	0 PLACES ±	APPR BY	DATE	SERIES	MATERIAL NUMBER	CUSTOMER		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	STGRIFFIN	2015/11/19	93627	SEE TABLE ON SHEET 2	GENERAL MARKET		
		DRAWING SIZE	THIRD ANGLE PROJECTION	DOCUMENT NUMBER		DOC TYPE	DOC PART	SHEET NUMBER
		A2		936270004		PSD	000	3 OF 3