



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Chip Beads (2518061017Y0)



Part Number: 2518061017Y0

MULTI- LAYER CHIP BEAD

## Part Number System: Example 2512063017Y1

25	1206	301	7	Y	1
<b>Chip Bead Code</b>	<b>Package Size Code</b>	<b>Impedance Code</b> 300Ω	<b>Packaging Code</b> 6= Bulk Packed 7= Taped and Reeled 7" Reel 8= Taped and Reeled 13" Reel	<b>Material Code</b> Y = Standard Signal Speed Z = High Signal Speed H = GHz Speed	<b>Current Code</b> 0 < 1.0A 1 ≥ 1.0A < 2.0A 3 ≥ 3.0A < 4.0A ETC

Fair- Rite offers a broad selection of cost effective multi- layer chip beads to suppress conducted EMI signals. Chip beads can be used in an array of devices such as cellular phones, computers, laptops, pagers, etc. The small package sizes accommodate automated placements and allow for a dense packaging of circuit boards.

Chip Beads are available in standard, high and GHz signal speeds.

### Packaging Options:

-  All multi- layer chip beads are supplied taped and reeled, if required bulk packed chip beads can be provided.

The suggested land patterns are in accordance to the latest revision of IPC-7351.

Weight: 0.06 (g)


Package Size: 1806 (4516)

Dim	mm	mm tol	nominal inch	inch misc.
A	1.6	±0.20	0.063	—
B	1.6	±0.20	0.063	—
C	4.5	±0.20	0.177	—
D	0.7	±0.30	0.028	—

Reel Information				
Tape Width mm	Pitch mm	Parts 7" Reel	Parts 13" Reel	Parts 14" Reel
12	8	2000	10000	—

### Land Patterns

V	W	X	Y	Z
2.00 (0.079")	3.90 (0.154")	1.80 (0.171")	1.90 (0.075")	—

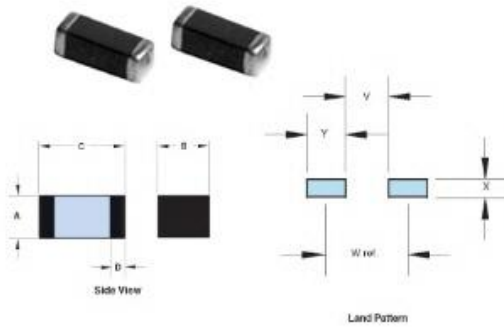

Pkg. Size	A	B	C	D	Wt. (g)	Land Patterns				Reel Information		
						V	W (ref)	X	Y	Tape Width mm	Pitch mm	Part 7'-Reel
<b>0402 (1005)</b>	0.5±0.05 0.020	0.5±0.05 0.020	1.0±0.05 0.040	0.25±0.15 0.010	<b>0.002</b>	0.40 0.016	1.30 0.051	0.70 0.028	0.90 0.035	8	4	1000
<b>0603 (1608)</b>	0.8±0.15 0.031	0.8±0.15 0.031	1.6±0.15 0.063	0.4±0.2 0.016	<b>0.006</b>	0.60 0.024	1.70 0.067	1.00 0.039	1.10 0.043	8	4	4000
<b>0805 (2012)</b>	0.9±0.2 0.035	1.25±0.2 0.049	2.0±0.2 0.079	0.5±0.3 0.020	<b>0.01</b>	0.60 0.024	1.90 0.075	1.50 0.059	1.30 0.051	8	4	4000
<b>1206 (3216)</b>	1.1±0.2 0.043	1.6±0.2 0.063	3.2±0.2 0.126	0.7±0.3 0.028	<b>0.03</b>	1.20 0.047	2.80 0.110	1.80 0.071	1.60 0.063	8	4	3000
<b>1806 (4516)</b>	1.6±0.2 0.063	1.6±0.2 0.063	4.5±0.2 0.177	0.7±0.3 0.028	<b>0.06</b>	2.00 0.079	3.90 0.154	1.80 0.071	1.90 0.075	12	8	2000
<b>1812 (4532)</b>	1.5±0.2 0.069	3.2±0.2 0.126	4.5±0.2 0.177	0.7±0.3 0.028	<b>0.09</b>	2.00 0.079	3.90 0.154	3.40 0.134	1.90 0.075	12	8	1000

**Chart Legend**  
+ Test frequency


Typical Impedance ( $\Omega$ )	
50 MHz	73
100 MHz <sup>+</sup>	100 ±25%
500 MHz	153
1000 MHz <sup>+</sup>	-

Electrical Properties	
Max DCR ( $\Omega$ )	0.3
Max Current (mA)	400


The impedance values listed are typical values. The nominal impedance with a +/- 25% tolerance is specified for the + marked 100 MHz. Chip beads are measured for impedance on the HP 4291A and fixture HP 16192A. Chip beads are 100% tested for impedance and dc resistance.



### 2518061017Y0

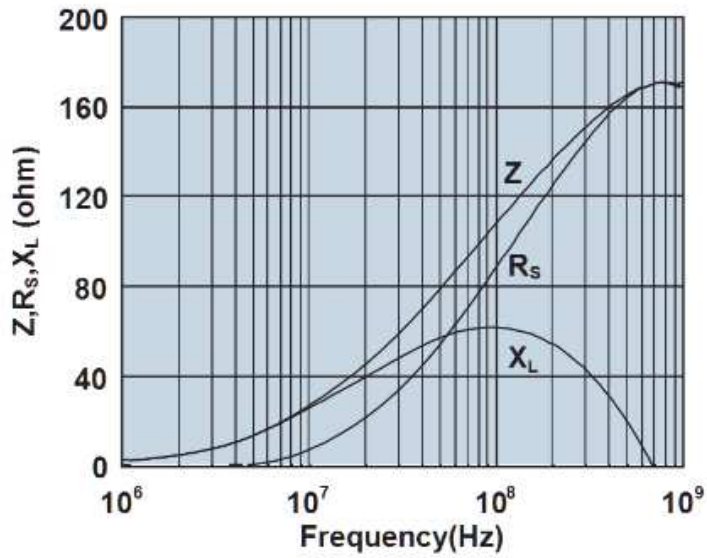

Impedance, reactance, and resistance vs. frequency.

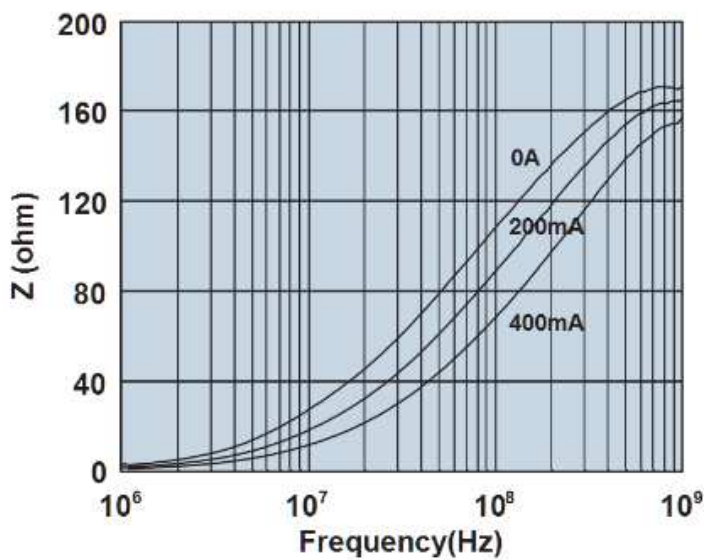

Impedance vs. frequency with dc bias.