



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Radio module deRFarm7 25A02

## Datasheet

- The pluggable radio module deRFarm7-25A02 features an AT91SAM7X512 microcontroller and a 2.4 GHz transceiver Atmel AT86RF231. The module complies with IEEE 802.15.4 and can be used for ZigBee / 6LoWPAN / RF4CE or proprietary applications.
- The 25A02 module has two 23 pin male connectors (1.27 mm pitch) which give access to most functions of the AT91SAM7X512.
- The onboard coaxial jack (U.FL) allows the connection of different antennas using standard pigtailed. The transceiver generates up to +2.5 dBm transmit power and has a receiver sensitivity of -101 dBm giving a link budget of up to 103 dB. A hardware 128-Bit AES encryption engine is part of the transceiver.
- The power supply range is from 3.0 VDC to 3.6 VDC with transmit and receive currents of approx. 45 mA @ 12MHz CPU clock. A current consumption of less than 250 µA can be achieved in sleep mode.
- Special features of the deRFarm7 module family are the integrated Ethernet MAC (EMAC) and the integrated USB device port (UDP).




### Technical Data

<b>Dimensions</b>	30 x 22.7 x 8.2 mm
<b>Operating temperature</b>	-40 to +85°C
<b>Control and display elements</b>	no
<b>Power supply</b>	3.0 to 3.6 VDC
<b>Power consumption</b>	Active: 45 mA @ 12MHz    Sleep: < 250 µA
<b>Connections</b>	2 x 23 Pin I/O Connector U.FL coaxial jack
<b>Antenna</b>	no
<b>Antenna gain</b>	no
<b>Antenna diversity</b>	no
<b>Range</b>	Depending upon the antenna used > 200 m (line of sight) with a 0dB antenna
<b>Frequency range</b>	2.4 GHz
<b>Transmitting power</b>	+2.5 dBm
<b>Receiver sensitivity</b>	-101 dBm
<b>IEEE Standard</b>	IEEE 802.15.4
<b>Data rate (brutto)</b>	250 kbit/s, 500 kbit/s, 1 Mbit/s, 2 Mbit/s
<b>Microcontroller</b>	AT91SAM7X512
<b>Transceiver</b>	AT86RF231
<b>Interfaces</b>	JTAG, DBGU, I2C, SPI, UART, USB, RMII, GPIO, ADC
<b>Certification</b>	CE, ETSI, FCC

### Technical Data

**Pin configuration**

1:	VCC	13:	PA18	24:	VCC	36:	PB28
2:	DGND	14:	PA3	25:	DGND	37:	PB5
3:	ADVREF	15:	PA17	26:	PA27	38:	TCK
4:	USBDM	16:	PB0	27:	PA0	39:	PB7
5:	RSTN	17:	PA16	28:	PA28	40:	TMS
6:	PB3	18:	PB8	29:	PA4	41:	PB1
7:	PA11	19:	PB6	30:	PB9	42:	TDO
8:	PB26	20:	PB18	31:	PB21	43:	JTAGSEL
9:	PA10	21:	PB15	32:	USBDP	44:	TDI
10:	PA1	22:	DGND	33:	PB19	45:	DGND
11:	PB25	23:	DGND	34:	PB27	46:	DGND
12:	PB2			35:	PA14		

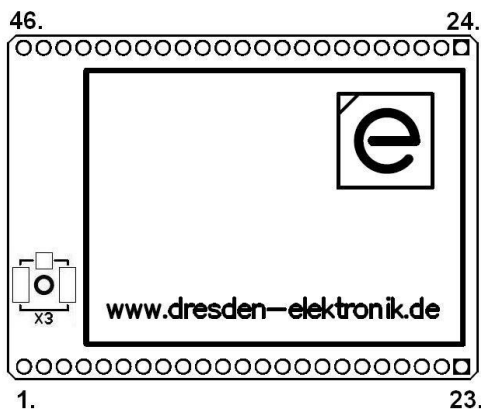

Top View deRFarm7-25A02

**Connections**

**Scope of delivery**

Radio Module deRFarm7-25A02

**Order No.**

BN-027265

**Order Information**

**Board variants**

Radio Module deRFarm7-25A00

BN-027264

Radio Module deRFarm7-15A02

BN-030974

**Variants**

More information about the variants is described in detail in the user manual.

Order online: <https://shop.dresden-elektronik.de/>

**Contact**