



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Type 0ADBC / 0ADBP

## Fast Acting Fuse Series

HF  0ADBC/0ADBP Series, 6x32mm Ceramic Tube Fast-acting Fuse

RoHS 2 Compliant

### Description

A 1000 VAC/VDC rated ceramic tube cartridge fuse in a compact 6.3 x 32mm package

### Features



- Fast Acting, high breaking capacity under 1000VDC/AC
- Available in cartridge and pigtail axial lead
- Designed to UL 248-1
- RoHS 2 compliant
- Halogen Free
- Leadfree

### Applications

- Digital Measuring Instrument
- Industrial Power Supply
- DC/DC module

LEAD FREE =   
HALOGEN FREE = 

### Physical Specifications


Materials	Body : Ceramic
	Cap : Silver Plated Caps
	Pigtail Leads : Tin Plated Copper
Marking	On Fuse :
	"bel"
	"0ADB" "Current Rating", "Voltage Rating", " Appropriate Safety Logos"
	On Label :
	"bel", "0ADBC" or "0ADBP", "Current Rating", "Voltage Rating", "Interrupting Rating", " Appropriate Safety Logos" and  ,  (China RoHS compliant).



### Electrical Characteristics

Testing Current	Opening Time
100%	4 hour Min.
250%	120 sec Max.

### Ratings

SAFETY AGENCY	SAFETY AGENCY CERTIFICATE NUMBER	VOLTAGE RATING (V)	AMPERE RANGE / VOLT @ I.R. ABILITY*
	E20624	200mA - 3A / 1000V AC/DC	200mA - 3A / 1000V @ 10KA AC / 1000V @ 10KA DC

\* I.R. = INTERRUPTING RATING = SHORT CIRCUIT RATING (AMPS)

Specifications subject to change without notice



Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
Bel.US.CS@belf.com  
[belfuse.com/circuit-protection](http://belfuse.com/circuit-protection)

# Type 0ADBC / 0ADBP

## Fast Acting Fuse Series

HF  0ADBC/0ADBP Series, 6x32mm Ceramic Tube Fast-acting Fuse

RoHS 2 Compliant

### Environmental Specifications

Operating Temperature	-55 °C to +125 °C
Terminal Strength	MIL-STD-202G, Method 211 Test Condition A
Lead Solderability	MIL-STD-202, Method 208
Mechanical Vibration	MIL-STD-202, Method 201
Thermal Shock	MIL-STD-202, Method 107, Test Condition B (5 cycles -65 °C to +125 °C).
Humidity	MIL-STD-202, Method 103, Test Condition A 95%RH and 40 °C for 240 hours

### Electrical Specifications

Part Number	Ampere Rating	Typical Cold Resistance (mOhms)	Voltage and Interrupting Ratings	Typical Voltage Drop (mV)	Typical Pre-Arcing I <sup>2</sup> t (A <sup>2</sup> Sec)
0ADBC0200-BE	200mA	3900	See Table of Ratings on Page 1 for Voltage and associated Interrupting Ratings	916	0.0031
0ADBP0200-RE					
0ADBC0250-BE	250mA	2755		850	0.009
0ADBP0250-RE					
0ADBC0315-BE	315mA	1875		900	0.050
0ADBP0315-RE					
0ADBC0400-BE	400mA	1845		860	0.059
0ADBP0400-RE					
0ADBC0500-BE	500mA	1160		600	0.081
0ADBP0500-RE					
0ADBC0600-BE	600mA	1030		550	0.178
0ADBP0600-RE					
0ADBC1000-BE	1A	450		560	0.21
0ADBP1000-RE					
0ADBC1250-BE	1.25A	260		550	3
0ADBP1250-RE					
0ADBC1600-BE	1.6A	165	350	3.72	
0ADBP1600-RE					
0ADBC2000-BE	2A	150	400	1.5	
0ADBP2000-RE					
0ADBC2500-BE	2.5A	88	300	4.5	
0ADBP2500-RE					
0ADBC3000-BE	3A	60	270	7.54	
0ADBP3000-RE					

Consult manufacturer for other ratings

Specifications subject to change without notice

\* DC Cold Resistance are measured at <10% of rated current in ambient temperature of 25°C

\* Typical Pre-arcing I<sup>2</sup>t are measured at 10In Current



Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
Bel.US.CS@belf.com  
[belfuse.com/circuit-protection](http://belfuse.com/circuit-protection)


# Type 0ADBC / 0ADBP

## Fast Acting Fuse Series


HF  0ADBC/0ADBP Series, 6x32mm Ceramic Tube Fast-acting Fuse

RoHS 2 Compliant

### Average Time Current Curve

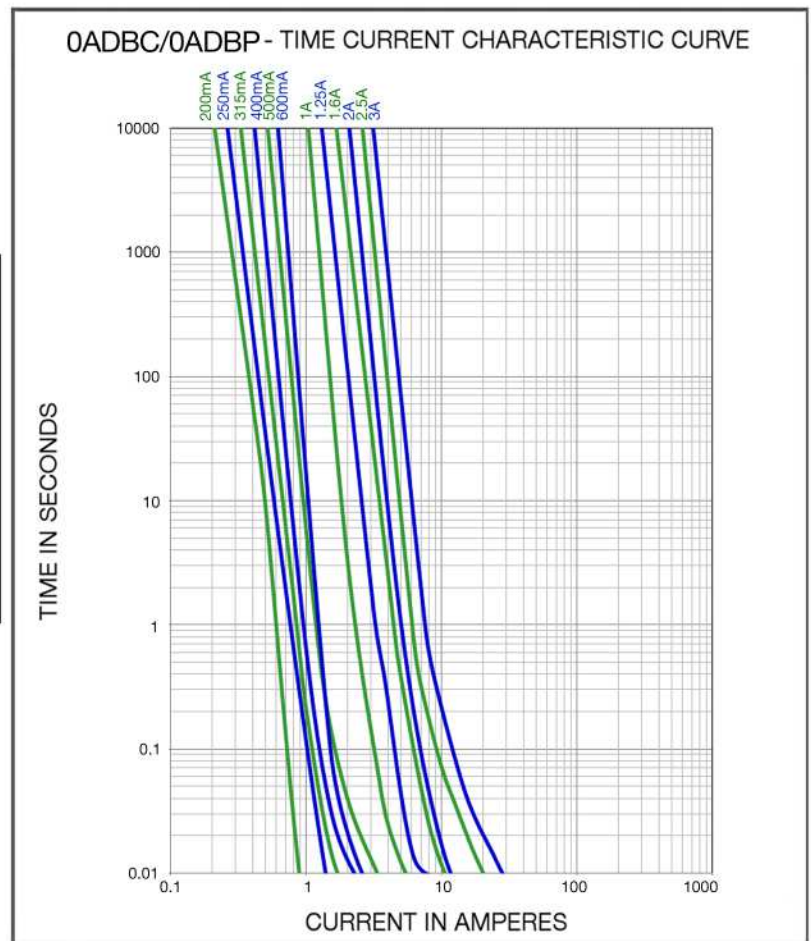

### Temperature Re-Rating Curve

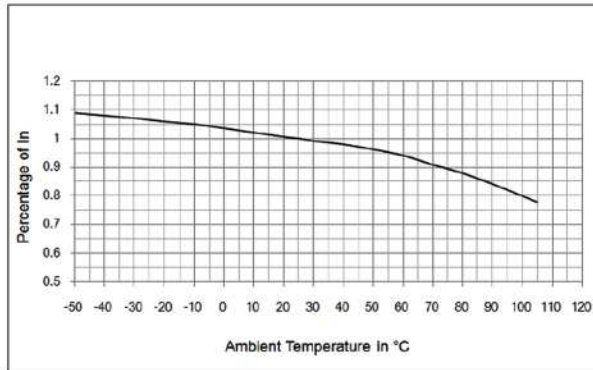

### Soldering parameters for Pigtail Type

Wave Soldering Compatible : (260° C, 10 sec max)

Hand-Solder:

Solder Iron Temperature: (350° C +/- 5° C)

Heating Time: (5 sec max)

Specifications subject to change without notice



Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
Bel.US.CS@belf.com  
[belfuse.com/circuit-protection](http://belfuse.com/circuit-protection)

# Type 0ADBC / 0ADBP

## Fast Acting Fuse Series

HF  0ADBC/0ADBP Series, 6x32mm Ceramic Tube Fast-acting Fuse

RoHS 2 Compliant


### Fuse FGNO Explanation

0ADB X [XXXX] - XX


0ADBC/P=0ADBC/P; [XXXX]=Ampere Rating; XX=See Ordering Information as below

Fraction	Decimal	Milliamps	Bel FGNO[XXXX]	Fraction	Decimal	Amps	Bel FGNO[XXXX]
1/5	.200	200	0200		1.0	1	1000
1/4	.250	250	0250	1-1/4	1.25	1.25	1250
	.315	315	0315		1.6	1.6	1600
4/10	.400	400	0400		2.0	2	2000
1/2	.500	500	0500	2-1/2	2.5	2.5	2500
6/10	.600	600	0600		3.0	3	3000

### Mechanical Dimensions

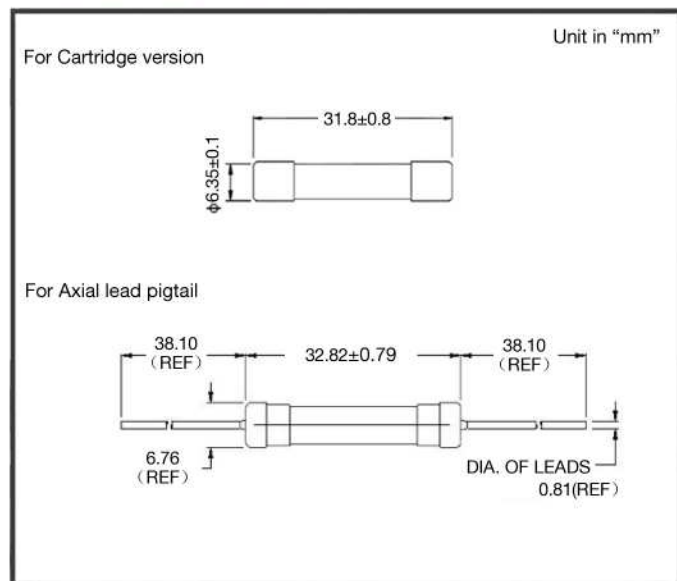

### Ordering Information

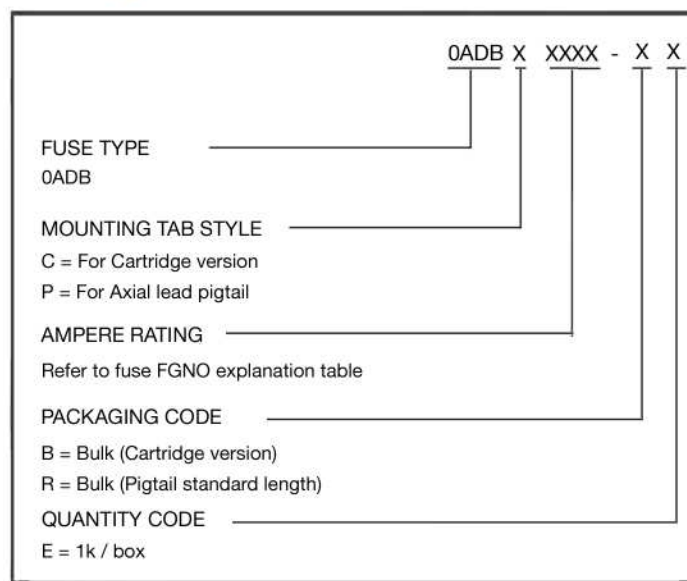

### Packaging

Packaging Option	Quantity	Packaging Code
Bulk	1000	BE
Bulk (Pigtail Type)	1000	RE

Specifications subject to change without notice



Bel Fuse Inc.  
206 Van Vorst Street  
Jersey City, NJ 07302 USA

+1 201.432.0463  
Bel.US.CS@belf.com  
[belfuse.com/circuit-protection](http://belfuse.com/circuit-protection)