



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Axial Lead and Cartridge Fuses

Special Midget

1³/₈" Long Fast-Acting Type Fuse BLS Series




ELECTRICAL CHARACTERISTICS:

% of Ampere Rating	Ampere Rating	Opening Time
135%	$\frac{2}{10}$ -10	1 hour, Maximum
200%	$\frac{2}{10}$ -10	2 minutes, Maximum

AGENCY APPROVALS: Listed by Underwriters Laboratories from $\frac{1}{2}$ through 5 amperes and Certified by CSA from $\frac{1}{2}$ through 5 amperes.

INTERRUPTING RATING: 10,000 amperes at rated VAC.

PATENTED

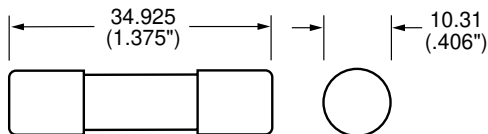

ORDERING INFORMATION:

Cartridge Catalog Number	Ampere Rating	AC Voltage Rating	Nominal Resistance Cold Ohms
BLS 2/10	.200	600	36
BLS 4/10	.400	600	11.5
BLS 1/2	.500	600	1.25
BLS 3/4	.750	600	.591
BLS 8/10	.800	600	.524
BLS 1	1	600	.944
BLS 1 $\frac{1}{2}$	1.5	600	.190
BLS 1 $\frac{9}{10}$	1.6	600	.180
BLS 1 $\frac{8}{10}$	1.8	600	.143
BLS 2	2	600	.2608
BLS 3	3	600	.10625
BLS 4	4	600	.0464
BLS 5	5	600	.0330
BLS 6	6	250	.0182
BLS 7	7	250	.1045
BLS 8	8	250	.012
BLS 10	10	250	.00881

Slo-Blo[®] Indicating Type Fuse FLA Series



ELECTRICAL CHARACTERISTICS:


% of Ampere Rating	Opening Time
135%	1 hour, Maximum

AGENCY APPROVALS: Listed by Underwriters Laboratories.

INTERRUPTING RATING: 10,000 amperes at rated VAC.

INDICATING PIN: Extends 0.3" when fuse opens.

NOTE: Fuses rated 12-30 amperes have dual tube construction.

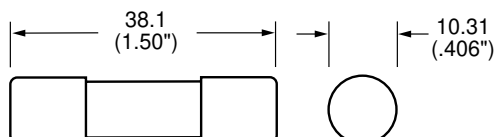

ORDERING INFORMATION:

Catalog Number	Ampere Rating	Nominal Resistance Cold Ohms	Catalog Number	Ampere Rating	Nominal Resistance Cold Ohms	AC Voltage Rating
FLA 1/10	.100	200.0	FLA 5	5	.06304	125
FLA 15/100	.15	88.90	FLA 5 $\frac{9}{10}$	5.6	.05194	125
FLA 2/10	.200	50.00	FLA 6	6	.04253	125
FLA 1/4	.250	32.00	FLA 6 $\frac{1}{4}$	6.25	.03794	125
FLA 3/10	.300	22.20	FLA 7	7	.03146	125
FLA 4/10	.400	11.39	FLA 8	8	.01890	125
FLA 1/2	.500	8.00	FLA 10	10	.01387	125
FLA 6/10	.600	5.55	FLA 12	12	.00689	125
FLA 8/10	.800	3.65	FLA 15	15	.00530	125
FLA 1	1	1.9504	FLA 20	20	.00385	125
FLA 1 $\frac{1}{8}$	1.125	1.7004	FLA 25	25	.00275	125
FLA 1 $\frac{1}{4}$	1.250	1.4004	FLA 30	30	.00226	125
FLA 1 $\frac{1}{10}$	1.4	1.1204				125
FLA 1 $\frac{1}{2}$	1.5	.8204				125
FLA 1 $\frac{9}{10}$	1.6	.7027				125
FLA 1 $\frac{8}{10}$	1.8	.5637				125
FLA 2	2	.4627				125
FLA 2 $\frac{1}{4}$	2.25	.3557				125
FLA 2 $\frac{1}{2}$	2.5	.2599				125
FLA 2 $\frac{9}{10}$	2.8	.2048				125
FLA 3	3	.1816				125
FLA 3 $\frac{2}{10}$	3.2	.1587				125
FLA 3 $\frac{1}{2}$	3.5	.1195				125
FLA 4	4	.09772				125
FLA 4 $\frac{1}{2}$	4.5	.07875				125