

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Teensy 3.2 + header

PRODUCT ID: 2756

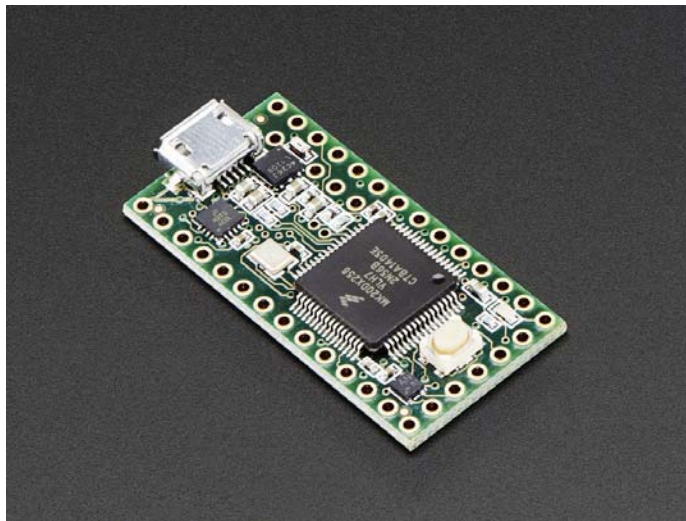

. Description

Teensy 3.2 is a small, breadboard-friendly development board designed by Paul Stoffregen and PJRC. Teensy 3.2 brings a low-cost 32 bit ARM Cortex-M4 platform to hobbyists, students and engineers, using an adapted version of the Arduino IDE (Teensyduino) or programming directly in C language. **Teensy 3.2 is an upgrade over 3.1!** Teensy 3.2 is a drop-in replacement upgrade for 3.1 and can run any sketches designed for 3.1.

This latest version of this complete USB-based microcontroller development system **now adds a more powerful 3.3V regulator**, as well as **accepts a wider voltage input range**. This board has the same size, shape and pinout as well as full compatibility with all shields and add-on boards made for the Teensy 3.1, plus **double the Flash memory** as the Teensy 3.0.

Please note: Teensy 3 and 2 are not official Arduino-brand products. Although the Teensyduino IDE has been adapted so that many simple Arduino projects will work with the Teensy, there will still be a lot of libraries and shields that will not work with this device! If you're new to microcontrollers, we suggest going with a classic Arduino UNO since all Arduino projects, examples and libraries will work with it.

Once headers are installed they can be fitted into 0.6" wide sockets

Technical Specifications:

- 32 bit ARM Cortex-M4 72MHz CPU (M4 = DSP extensions) Here is Freescale's reference manual for the chip (warning 1227 pages) as well as the Datasheet and User Guide!
http://cache.freescale.com/files/32bit/doc/ref_manual/K20P64M50SF0RM.pdf
http://cache.freescale.com/files/32bit/doc/data_sheet/K20P64M50SF0.pdf
http://cache.freescale.com/files/32bit/doc/quick_ref_guide/KQRUG.pdf
- 256K Flash Memory, 64K RAM, 2K EEPROM
- 21* High Resolution Analog Inputs (13 bits usable, 16 bit hardware)
- 34* Digital I/O Pins (21 shared with analog)
- 12 PWM outputs
- 1 12-bit DAC output
- 8 Timers for intervals/delays, separate from PWM
- USB with dedicated DMA memory transfers
- CAN bus
- 3 UARTs (serial ports)
- SPI, I2C, I2S, IR modulator
- I2S (for high quality audio interface)
- Real Time Clock (with user-added 32.768 crystal and battery)
- 16 general purpose DMA channels (separate from USB)
- Touch Sensor Inputs

• Technical Details

- Dimensions: 18mm x 37mm x 4mm / 1.4" x 0.7"
- Teensy 3 schematic <https://www.adafruit.com/images/product-files/2756/2756%20schem.gif>

