



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Axial Lead Beads - Power Filtering

Steward's two-terminal axial lead ferrite beads provide economical filtering for differential mode EMI suppression applications. Constructed using a continuous 22 gauge conductor, these devices are able to withstand high peak currents that can destroy other surface mount devices.

STEWARD PART NUMBERING SYSTEM

28	J	0138	-	1	1	R
MATERIAL TYPE	PRODUCT CODE	PART SIZE CODE	SELECTED DIMENSION CODE	ADDITIONAL DESCRIPTION	PACKAGING CODE	

Ambient Operating Temperature Range: -55°C to +125°C

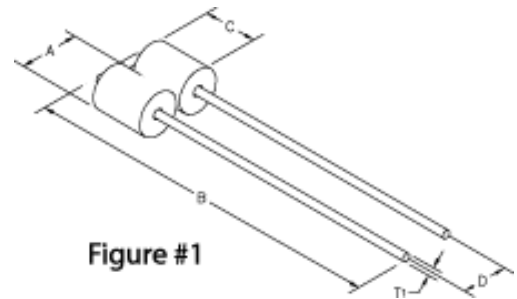


Figure #1

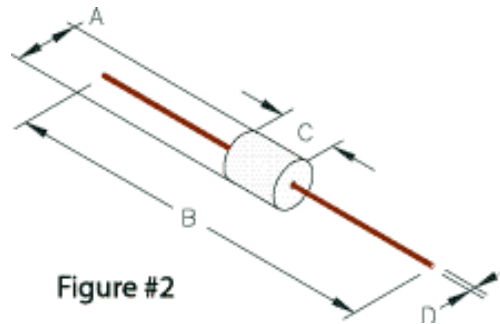


Figure #2

View Chart Data In:

 Millimeters Only

 Inches Only

 Both (Millimeters and Inches)

SORT: Click on the **A**↓ (ascending) or **Z**↓ (descending) in any chart heading to sort entire chart by data in that selected column.

IMPEDANCE CURVES: Click on the Part Number links below to view impedance curves.

COMPARE: For side-by-side comparison of data for a limited selection of parts, click on boxes under the "Compare" heading. Then click the "Compare Selected Parts" button at the bottom of this chart.

Part Number	Compare Selected Parts	Figure Number	NET Z @ 10 MHz nom	NET Z @ 25 MHz nom	NET Z @ 100 MHz nom	DCR Max	Rated Current mA	A mm	B mm	C mm	D mm	T1 mm
28J0138-11R	<input type="checkbox"/>	1	-	-	143	0.01	5000	3.51	25.4	4.45	3.81	0.64
28L0138-10R	<input type="checkbox"/>	2	-	45	75	0.01	5000	3.51	59.00	4.45	0.64	-
28L0138-20R	<input type="checkbox"/>	2	-	55	97	0.01	5000	3.51	59.00	5.99	0.64	-
28L0138-40R	<input type="checkbox"/>	2	-	99	135	0.01	5000	3.51	59.00	8.89	0.64	-
28L0138-50R	<input type="checkbox"/>	2	-	92	153	0.01	5000	3.51	59.00	9.53	0.64	-
28L0138-60R	<input type="checkbox"/>	2	-	-	180	0.01	5000	3.51	58.93	11.43	0.64	-
28L0138-70R	<input type="checkbox"/>	2	-	123	220	0.01	5000	3.51	59.00	13.97	0.64	-
28L0138-80R	<input type="checkbox"/>	2	-	48	86	0.01	5000	3.51	59.00	5.23	0.64	-
28L0138-90R	<input type="checkbox"/>	2	-	-	110	0.01	10000	3.51	59.0	6.68	0.64	-
28L0138-A0R	<input type="checkbox"/>	2	-	71	127	0.01	5000	3.51	59.00	7.62	0.64	-

 Compare Selected Parts

Custom Parts are also available

[Request PDF's of part prints](#)

Equivalent Circuit

Specifications, which provide more details for the correct use of the described products, are available upon request. All specifications are subject to change without notice. For more technical information on any of the products listed above, please contact the Steward USA customer service department at 1 (800) 634-2673 or contact one of the Steward facilities below.

americas@steward.com
mexico@steward.com
europa@steward.com
asia@steward.com
china@steward.com

Copyright© 2005 Steward, Inc.

Last Updated: 3/23/2005