



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




PLC-OSP-.../24DC/3RW

PLC INTERFACE With Extended Input Voltage and Temperature Range for Railway Applications

INTERFACE

Data Sheet
102490_en_01

© PHOENIX CONTACT - 03/2008

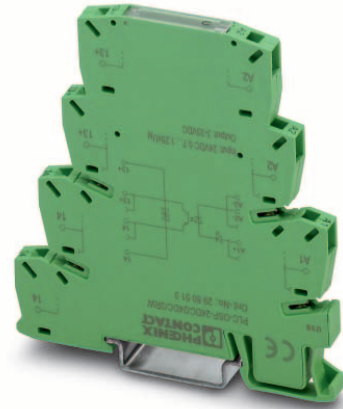

1 Description

Ultra-slim PLC interfaces with the user-friendly plug-in bridge system now offer an extended range of optocoupler interfaces for applications in electrical equipment in rail vehicles.

The new **PLC-OSP-.../24DC/3RW** interface modules with extended input voltage and temperature range are designed for use according to DIN EN 50155 (VDE 0115-200) "Railway Applications Part 200: Electronic Equipment Used on Rolling Stock".

The slim 6.2 mm PLC-OSP-...RW version has been specially developed for applications on rail vehicles, which are operated with an AC voltage, where the operating voltage is supplied via contact lines using a transformer with charger and battery.

The PLC-OSP-...RW is designed with a permissible operating voltage of $0.7 \dots 1.25 \times U_N$.

The temperature of the air inside the vehicle and its housing can increase to up to $+70^\circ\text{C}$ due to external influences. This extreme requirement is easily met by the PLC-OSP-...RW with its temperature range of -25°C to $+70^\circ\text{C}$.

PLC-OSP-.../24DC/3RW offers shock resistance according to EN 50155 (requirements according to EN 61373).

1.1 Additional PLC Advantages

- Integrated input/protective circuit
- User-friendly, vibration-resistant, and time-saving plug-in bridge system





Make sure you always use the latest documentation.
It can be downloaded at www.download.phoenixcontact.com.
A conversion table is available on the Internet at
www.download.phoenixcontact.com/general/7000_en_00.pdf.



This data sheet is valid for all products listed on the following page:

2 Ordering Data

PLC INTERFACE

Description	Type	Order No.	Pcs./Pck.
Single-channel optocoupler for railway applications, 24 V DC input voltage, with spring-cage connection, for mounting on 	PLC-OSP-24DC/24DC/3RW	2980513	10
Single-channel optocoupler for railway applications, 110 V DC input voltage, with spring-cage connection, for mounting on 	PLC-OSP-110DC/24DC/3RW	2980526	10



For the protection of input and output, inductive loads must be dampened with an effective protective circuit.

Accessories

Description	Type	Order No.	Pcs./Pck.
Insulating plate	PLC-ATP BK	2966841	25



The PLC-ATP BK insulating plate should be used in the following cases: always fit at the start and end of a PLC terminal strip for voltages greater than 250 V (L1, L2, L3) between the same terminal points on adjacent modules (FBST 8-PLC... or FBST 500... can be used for potential bridging) and for safe isolation between adjacent modules.

For additional accessories such as power terminal blocks and plug-in bridges, please refer to the INTERFACE catalog or www.phoenixcontact.com.

3 Technical Data

Input Data	...24DC...	...110DC...
Nominal input voltage U_N ¹	24 V DC	110 V DC
Permissible range (with reference to U_N)	0.7 ... 1.25 x U_N (t < 1 s = 0.6 ... 1.40 x U_N)	
Typical input current at U_N	8.5 mA	3 mA
Switch-on threshold U_{ON}	$\geq 0.6 \times U_N$	
Switch-off threshold U_{OFF}	$\leq 0.3 \times U_N$	
Typical response time at U_N	40 μ s	80 μ s
Typical release time at U_N	200 μ s	600 μ s
Transmission frequency at U_N	300 Hz	100 Hz
Input circuit	Protection against polarity reversal	
Status indicator	Yellow LED	

¹ The PLC-ATP BK insulating plate must be installed for voltages greater than 250 V (L1, L2, L3) between the same terminal points on adjacent modules (see "Accessories"). FBST 8-PLC... or FBST 500... is then used for potential bridging.


Output Data	...24DC...	...110DC...
Nominal output voltage U_N	24 V DC	
Permissible range (with reference to U_N)	3 V DC ... 33 V DC (t < 1 s = 1.40 x U_N)	
Limiting continuous current	3 A (see "Derating Curve" on page 3)	
Voltage drop at maximum limiting continuous current	< 200 mV	
Output configuration	2-wire floating	
Output circuit	Protection against polarity reversal, surge protection	
Surge voltage limitation	> 33 V DC	

General Data	
Rated insulation voltage	250 V
Impulse voltage withstand level	4 kV
Ambient temperature range	
Operation	-25°C ... 70°C
Storage/transport	-40°C ... 85°C
Test voltage input/output	2.5 kV _{rms} , 50 Hz, 1 min.
Nominal operating mode	100% operating factor
Air and creepage distances between the circuits ¹	DIN EN 50178/VDE 0160 (basic insulation)
Standards/specifications	DIN EN 50155/VDE 0115-200 (in relevant parts)
Pollution degree	2
Surge voltage category	III
Mounting position	Any
Mounting	Can be aligned without spacing
Weight	40 g, approximately
Connection method	Spring-cage connection
Conductor cross-section	
Solid	0.2 mm ² ... 2.5 mm ² (24 - 14 AWG)
Stranded	0.2 mm ² ... 2.5 mm ² (24 - 14 AWG)
Stripping length	8 mm
Dimensions (W x H x D)	6.2 mm x 86 mm x 80 mm
Housing material	Polybutylene terephthalate PBT, non-reinforced, green

¹ The PLC-ATP insulating plate must be installed for safe isolation between adjacent modules (see "Accessories"). FBST 8-PLC... or FBST 500... is then used for potential bridging.

Approvals	
CE	CE
UL/CUL	Applied for

4 Block Diagram

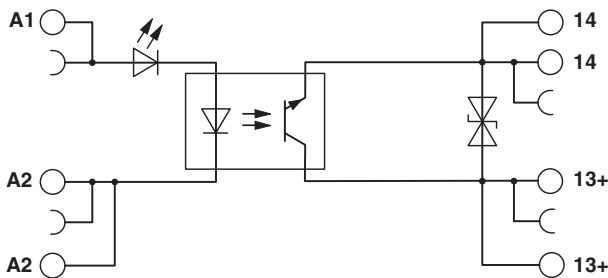

5 Derating Curve

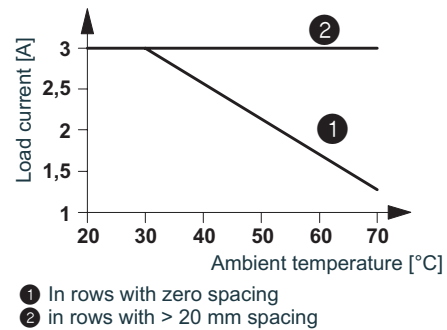


Figure shows load current depending on the ambient temperature for PLC-OSP-.../24DC/3RW. Operating time: 100% operating factor.