



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION		DATE	APVD
E	B		C	ECR-05-016219		23NOV05	JMS FWK

- NOTES:
- 1

PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2

100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 3

Au PLATING
- 4

Ni PLATING
- 5

THIS ITEM MUST BE WHITE
- 6

HAND TOOL : 9-1478240-0
- 7

DIE SET : 9-1478242-0
- 8

ELECTRICAL CHARACTERISTICS

FREQUENCY RANGE: DC - 2 GHz

NOMINAL IMPEDANCE: 75 Ohm

INSULATION RESISTANCE: 5000 MOhm

WORKING VOLTAGE: 500 Volts RMS at Sea Level

DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max

CONTACT RESISTANCE: 1.50 mOhm Max

CENTRE CONTACT: 0.20 mOhm Max

OUTER CONTACT: 1.20:1 Max

VSWR @ 2GHz: 0.20 Max

INSERTION LOSS dB @ x 2 GHz:
- 9

MECHANICAL CHARACTERISTICS

COUPLING RETENTION FORCE: N/A



CABLE RETENTION FORCE: 170N Min

MOUNT NUT RECOMMENDED TORQUE: 4N

DURABILITY: 500 Cycles Min
- 10

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE: -65 to +165 DegC

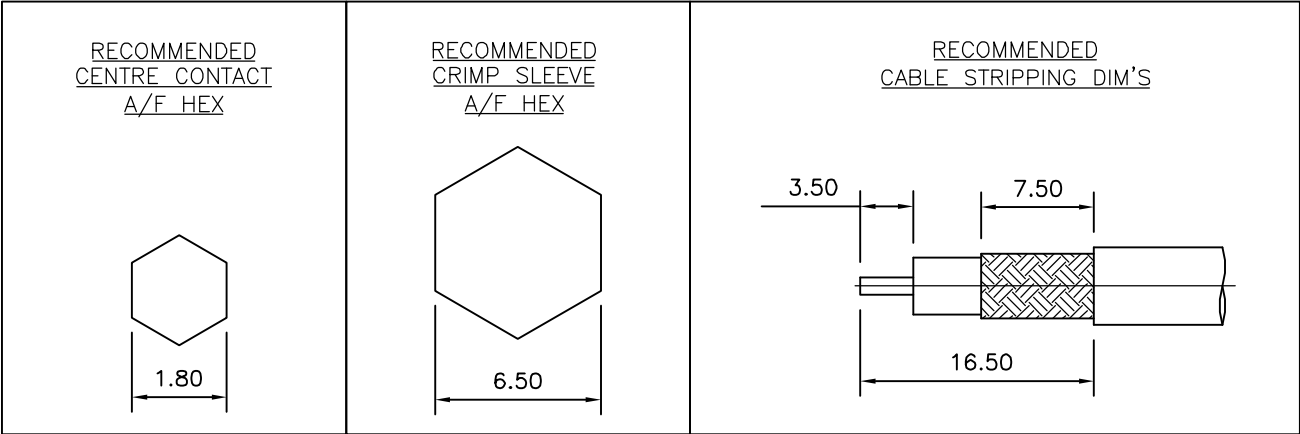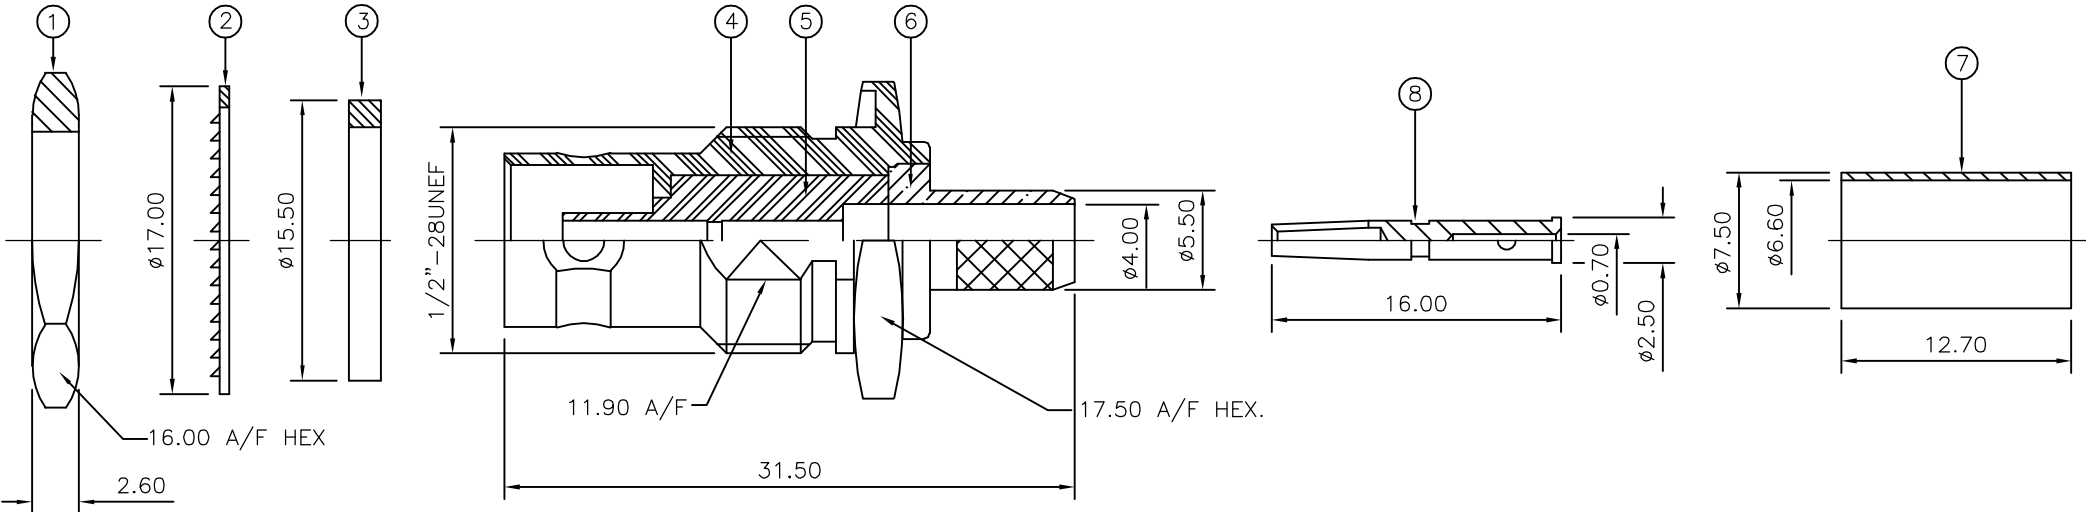

		1	1	BRASS	3	CONTACT	8
		1	1	BRASS	4	FERRULE	7
		1	1	BRASS	4	CHASSIS	6
		1	1	PTFE		INSULATION	5
		1	1	BRASS	4	BODY	4
		1	1	SILICON RUBBER	5	GASKET	3
		1	1	STEEL	4	LOCKWASHER	2
		1	1	BRASS	4	HEX NUT	1
		6--0	1--0	MATERIAL		DESCRIPTION	ITEM
		3	3				
QUANTITY PER ASSY				PARTS LIST			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J.SANDWELL	23NOV05	tyco Tyco Electronics Corporation Electronics Bideford EX39 4HE		
		CHK	S.PARLOW	23NOV05			
DIMENSIONS: mm		APVD	F.WHEELER-KING	23NOV05	NAME BNC BULKHEAD JACK REAR MOUNT CRIMP 75 OHM RG59B/U, 62A/U, 140/U, 210/U, URM90, KX6A, KX25, KX52, KX53		
		PRODUCT SPEC	108-3435				
MATERIAL SEE TABLE		APPLICATION SPEC	411-3247		SIZE	CAGE CODE	DRAWING NO
		WEIGHT	-		A3	00779	C-1337435
		CUSTOMER DRAWING			SCALE	SHEET	REV
					NTS	1 OF 1	C