



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



TOSHIBA Transistor Silicon NPN Triple Diffused Type


# 2SC5459

Switching Regulator Applications  
 High-Voltage Switching Applications  
 DC-DC Converter Applications

- High-speed switching:  $t_f = 0.3 \mu s$  (max) ( $I_C = 1.2 A$ )
- High collector breakdown voltage:  $V_{CEO} = 400 V$
- High DC current gain:  $h_{FE} = 20$  (min) ( $I_C = 0.3 A$ )

### Absolute Maximum Ratings ( $T_c = 25^\circ C$ )

Characteristics		Symbol	Rating	Unit
Collector-base voltage		$V_{CBO}$	600	V
Collector-emitter voltage		$V_{CEO}$	400	V
Emitter-base voltage		$V_{EBO}$	7	V
Collector current	DC	$I_C$	3	A
	Pulse	$I_{CP}$	5	
Base current		$I_B$	1	A
Collector power dissipation	$T_a = 25^\circ C$	$P_C$	2.0	W
	$T_c = 25^\circ C$		25	
Junction temperature		$T_j$	150	$^\circ C$
Storage temperature range		$T_{stg}$	-55 to 150	$^\circ C$

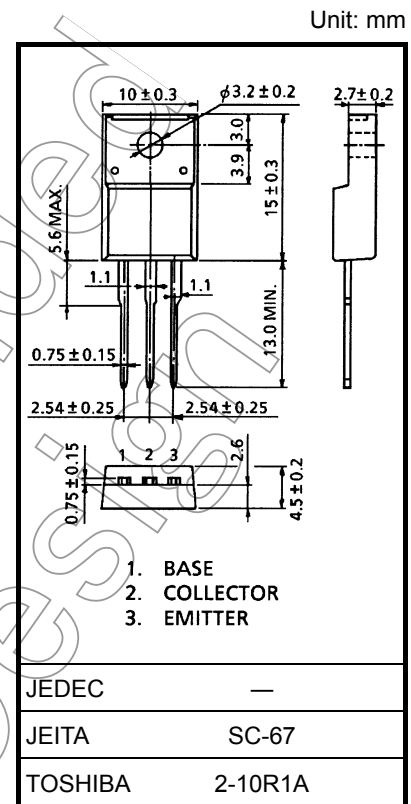

Weight: 1.7 g (typ.)


Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/Derating Concept and Methods) and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

**Electrical Characteristics (Tc = 25°C)**







Characteristics		Symbol	Test Condition	Min	Typ.	Max	Unit	
Collector cut-off current		$I_{CBO}$	$V_{CB} = 480\text{ V}, I_E = 0$	—	—	100	$\mu\text{A}$	
Emitter cut-off current		$I_{EBO}$	$V_{EB} = 7\text{ V}, I_C = 0$	—	—	10	$\mu\text{A}$	
Collector-base breakdown voltage		$V_{(BR) CBO}$	$I_C = 1\text{ mA}, I_E = 0$	600	—	—	V	
Collector-emitter breakdown voltage		$V_{(BR) CEO}$	$I_C = 10\text{ mA}, I_B = 0$	400	—	—	V	
DC current gain		$h_{FE} (1)$	$V_{CE} = 5\text{ V}, I_C = 1\text{ mA}$	13	—	—		
		$h_{FE} (2)$	$V_{CE} = 5\text{ V}, I_C = 0.3\text{ A}$	20	—	—		
Collector-emitter saturation voltage		$V_{CE} (sat)$	$I_C = 1.2\text{ A}, I_B = 0.15\text{ A}$	—	—	1.0	V	
Base-emitter saturation voltage		$V_{BE} (sat)$	$I_C = 1.2\text{ A}, I_B = 0.15\text{ A}$	—	—	1.3	V	
Switching time	Turn-on time	$t_r$	<p><math>V_{CC} \approx 360\text{ V}</math>  <math>300\ \Omega</math>  <math>20\ \mu\text{s}</math>  <math>I_{B1}</math>  Input  <math>I_{B21}</math>  Output</p> <p><math>I_{B1} = 0.15\text{ A}, I_{B2} = -0.3\text{ A},</math>  duty cycle <math>\leq 1\%</math></p>	—	—	0.5	$\mu\text{s}$	
		Storage time		$t_{stg}$	—	—		2.0
		Fall time		$t_f$	—	—		0.3

**Marking**



C5459 ← Part No. (or abbreviation code)  
 Lot No.

A line indicates lead (Pb)-free package or lead (Pb)-free finish.

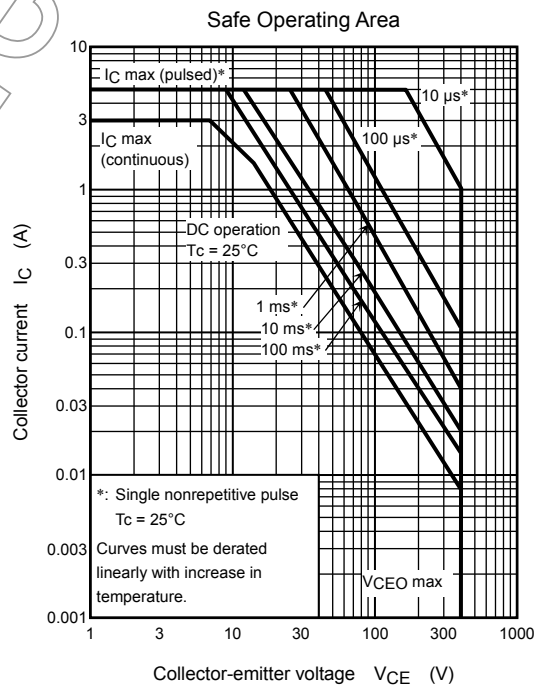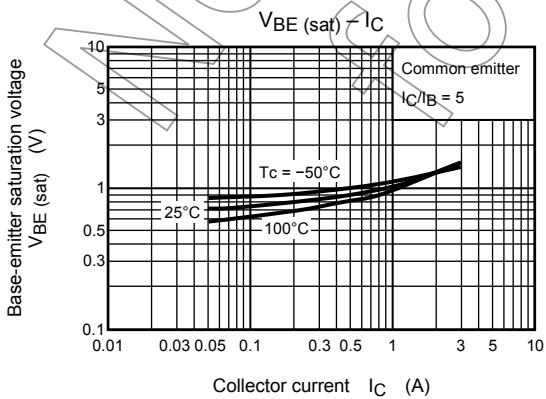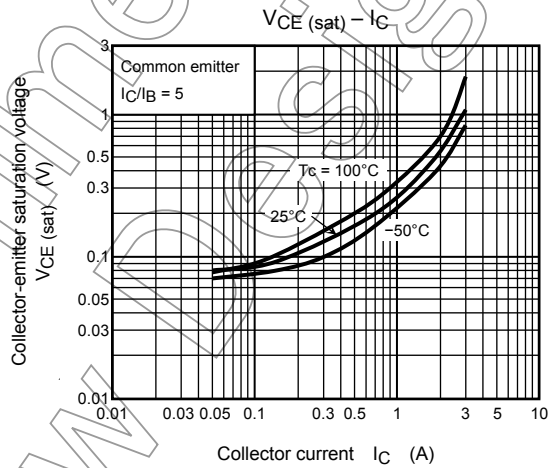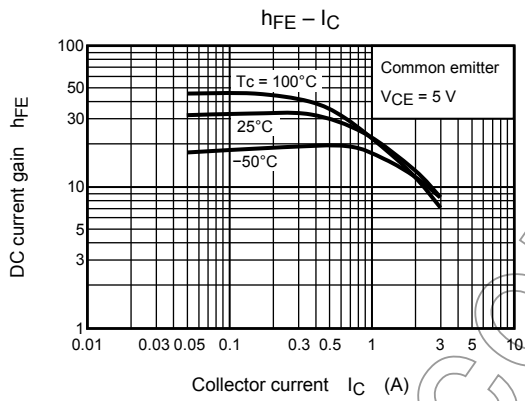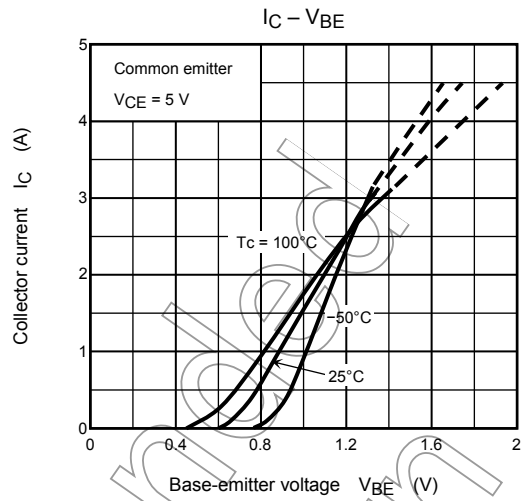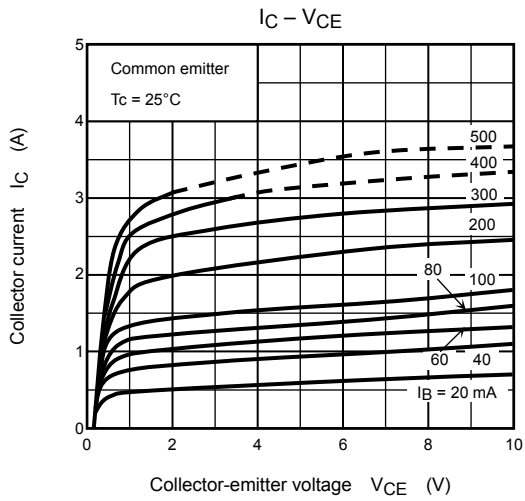

**RESTRICTIONS ON PRODUCT USE**

20070701-EN

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.  
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patents or other rights of TOSHIBA or the third parties.
- Please contact your sales representative for product-by-product details in this document regarding RoHS compatibility. Please use these products in this document in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses occurring as a result of noncompliance with applicable laws and regulations.