



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






TW125 Low Current / Low Voltage 1.1 to 1.7 GHz 27 dB gain In-line Amplifier

The TW125 has been replaced by an improved performance inline amplifier with a Part Number of TW125B.

All orders for the TW125 will be fulfilled with TW125B's. If at all possible, please change orders with a Part Number of TW125B.

IMPORTANT: Amplifiers are directional and must be installed in the orientation indicated on the product label. (Arrow points away from antenna)

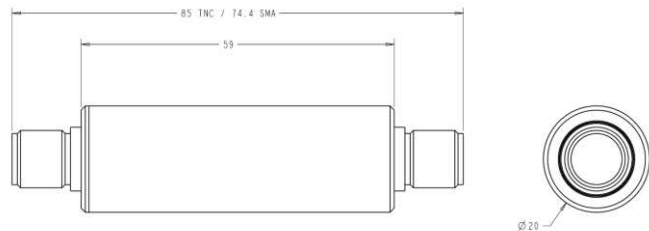

Applications

- All GNSS Signals – GPS, GLONASS, Galileo & SBAS
- Commercial, Industrial and Military Telematics Systems
- Wireless and Telecom Timing and Synchronization Applications

Features

- Low Current / low voltage
- Very low noise
- Wide input voltage 3 to 16 Volts
- Nickel-plated brass, IP67 compliant housing
- Powered via antenna coax from receiver
- 50 Ohm port impedance
- Available SMA, TNC, and N-Type jack connectors
- RoHS and REACH compliant

Benefits

- Improves signal reception
- Enables extended cable runs
- Avoid installation of costly low-loss cable
- Fits in line with antenna cable
- No external DC power supply required
- Easy to install - mounting clamp included



TW125 Low Current / Low Voltage 1.1 to 1.7 GHz 27 dB gain In-line Amplifier

Specifications

Vcc =3.3V, over full bandwidth, T=25 °C

Electrical

• Nominal Gain	27 dB +.1/- .2 dB typ.
• Pass Band Ripple	+/-0.5 dB
• Impedance	50 Ohms
• Noise Figure	2 dB typ.
• Bandwidth	1.1 to 1.7 GHz
• Input VSWR	1.3:1 typ..
• Output VSWR	1.3:1 typ.
• Reverse Isolation	>35 dB
• Output P1dB	+9dB min
• Group Delay	<1ns
• Output IP3	+14dBm
• Supply Range voltage	3 to 16 VDC Nominal, 12 VDC recommended operating max
• Supply Current	11mA typ.

Mechanicals & Environmental

Mechanical Size (body dimensions only)	2.32" L x 0.787" Dia. (59 mm L x 20 mm dia.)		
Connectors	SMA Jack, TNC Jack, or N-Type Jack		
Torque Limitations (in. lbs)	N-type	TNC	SMA
	6.5 - 8	9 - 11	3.6 - 4.5
Operating Temp. Range	-40 to +85 °C		
Enclosure	Nickel-plated brass		
Environmental	RoHS, REACH, and IP67 compliant		
Warranty	One year – parts and labour		

Ordering Information

- TW125 - 27dB gain In-Line Amp with SMA Jack 33-0125-0
- TW125 - 27dB gain In-Line Amp with TNC Jack 33-0125-1
- TW125 - 27dB gain In-Line Amp with N-Type female 33-0125-14 (premium applies)

IF AT ALL POSSIBLE, PLEASE USE THE PART NUMBER OF TW125B.



36 Steacie Drive, Ottawa ON K2K 2A9 Canada

Tel 613 591 3131

Fax 613 591 3121 sales@tallysman.com

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2010 Tallysman Wireless Inc. All rights reserved.