



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Type 4290 Series

Key Features

- High stability cermet element
- 0.5 Watt rating at 70°C
- Slim profile assists stacking
- Top & side adjustment styles available
- Flame retardant case

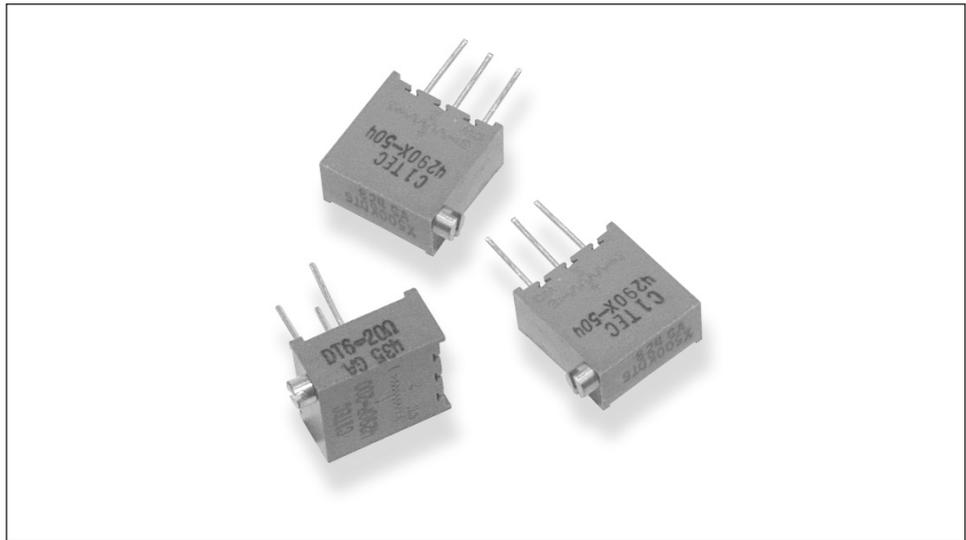

Where size and reliability are critical, this range of 10mm square multiturn trimming potentiometers satisfies the requirements in industrial and professional applications.

The cermet resistance element offers stability and high resolution. The trimmer is actuated by a lead screw with a slipping clutch at each end of travel. Top or side adjustment components are available and pin configurations meet the majority of requirements. All units are fully sealed to withstand immersion in board washing solvents.

Characteristics - Electrical

Resistance Range:	10R to 2M
Resistance Values:	1, 2 and 5 in each decade
Resistance Tolerance:	± 10%
End Resistance:	2 ohms or 1% whichever is greater
Slider Current:	100 mA DC or AC, maximum
Power Rating:	0.5 Watts at 70°C derating to zero at 125°C
Isolation Voltage:	430 V DC or AC peak
Limiting Element Voltage:	300 V DC or AC RMS, maximum
Breakdown Voltage:	900 V AC for one minute
Insulation Resistance:	1000 M at 500 V DC, minimum
Resolution:	Essentially Infinite
Rotational Noise (CRV):	3 Ohms or 1 %, whichever is greater
Temperature Coefficient:	± 250 ppm/°C, maximum
Electrical Adjustment:	25 turns

Characteristics - Mechanical


End Stop:	Slipping clutch both ends
Starting Torque:	35 mNm
Weight:	0.8 gram, approx.

Type 4290 Series

Characteristics - Environmental

Temperature Range:	-55°C to +125°C
Temperature Storage:	1000 Hrs at 125°C
Thermal Shock:	5 Cycles -55°C to +125°C
Bump Severity:	4000 Bumps; 40 G (3mm or 390m/s ²)
Vibration Severity:	10 - 500Hz; 20 G
Rotational Life:	200 Cycles
Load Life at 85°C:	ΔR <3% after 1000 hours
Sealing:	Sealed for board washing
Climatic Category:	55/125/21

Dimensions

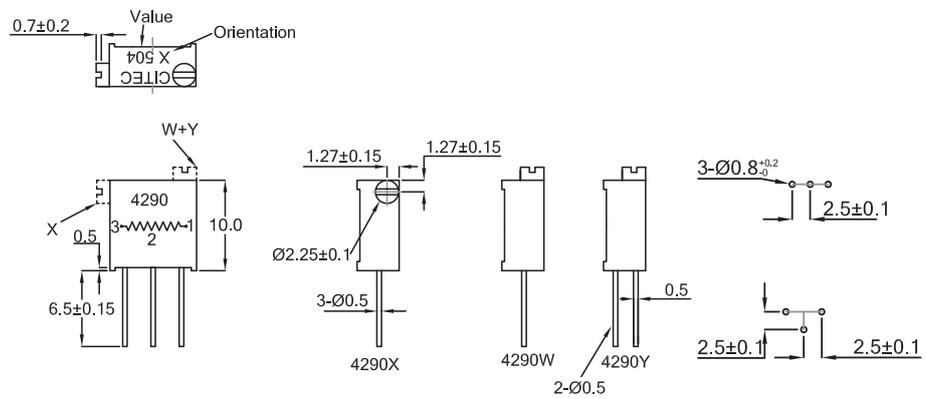

How to Order

4290	W	502	K
Common Part	Pin Configuration	Resistance Value	Tolerance
4290	W - Top Adjust X - Side Adjust Y - Top Adjust	The first two digits are significant figures of resistance value and the third denotes the number of zeros following. e.g. 1K: 102 10K: 103 100K: 104	K - $\pm 10\%$

TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.
Other logos, product and Company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this datasheet, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this datasheet are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.