

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







## Rosenberger TECHNICAL DATA SHEET 32K107-302L5 **SMA** STRAIGHT JACK

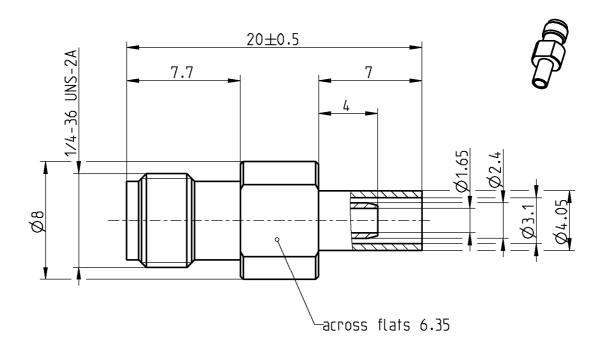

All dimensions are in mm; tolerances according to ISO 2768 m-H

n	$\boldsymbol{f}$	rfa	$\sim$
		па	

According to

IEC 60169-15; EN 122110; MIL-STD-348

## **Documents**

Assembly instruction

32 B21

## Material and plating

#### **Connector parts**

Center contact Outer contact Dielectric Crimping ferrule

## Material

**Plating** AuroDur®, gold plated CuBe CuBe or equiv. AuroDur®, gold plated **PTFE** 

Gold, 0.1 µm Copper

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel.: +49 8684 18-0

Page

email: info@rosenberger.de

## TECHNICAL DATA SHEET

# Rosenberger

2/2

## SMA STRAIGHT JACK

## 32K107-302L5

#### Electrical data

Impedance 50  $\Omega$ 

Frequency DC to 12.4 GHz

VSWR  $\leq$  1.05 + 0.01 x f [GHz], DC to 5 GHz Insertion loss  $\leq$  0.03 x  $\sqrt{f(GHz)}$  dB, DC to 5 GHz

 $\begin{array}{lll} \text{Insulation resistance} & \geq 5 \text{ x} 10^3 \text{ M}\Omega \\ \text{Center contact resistance} & \leq 3 \text{ m}\Omega \\ \text{Outer contact resistance} & \leq 2 \text{ m}\Omega \\ \text{Test voltage} & 1000 \text{ V rms} \\ \text{Working voltage} & 480 \text{ V rms} \\ \text{Power handling (at 20 °C, sea level, VSWR 1.0)} & \leq 200 \text{ W @ 2} \\ \end{array}$ 

Power handling (at 20 °C, sea level, VSWR 1.0)  $\leq$  200 W @ 2 GHz RF-leakage  $\geq$  100 dB up to 1 GHz

#### Mechanical data

 $\begin{array}{lll} \text{Mating cycles} & \text{min. 500} \\ \text{Center contact captivation: axial} & \geq 27 \text{ N} \\ \text{Coupling test torque} & \text{max. 1.7 Nm} \\ \text{Recommended torque} & 0.8 \text{ Nm to 1.1 Nm} \\ \end{array}$ 

#### Environmental data

Temperature range -55°C to +155°C

Thermal shock MIL-STD-202, Meth. 107, Cond. B
Corrosion MIL-STD-202, Meth. 101, Cond. B
Vibration MIL-STD-202, Meth. 204, Cond. D
Shock MIL-STD-202, Meth. 213, Cond. I

Moisture resistance MIL-STD-202, Meth. 106

RoHS compliant

#### **Tooling**

Crimping tool 11W150-000 Crimp insert 11W150-102

#### Suitable cables

www.rosenberger.de

RG 174 A/U, RG 188 A/U, RG 316 /U

email: info@rosenberger.de

#### Weight

Weight 2.78 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date		Rev.	Engineering change number	Name	Date
Krautenbacher J.	12/09/07	J_Krautenbacher	21.07.16		d00	15-1629	I_Wallner	21.07.16
Rosenberger Hochfrequenztechnik GmbH & Co. KG						el.: +49 8684 18-0		Page
P.O.Box 1260	D-84526	Tittmoning Germ	any					

RF\_35/12.04/3.0

<sup>-</sup> Limitations are possible due to the used cable type -