



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



NUMBER C-179436


三角錐 (3rd ANGLE PROJECTION)

METRIC

ALL DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DIST

回路番号1
CIRCUIT No.1

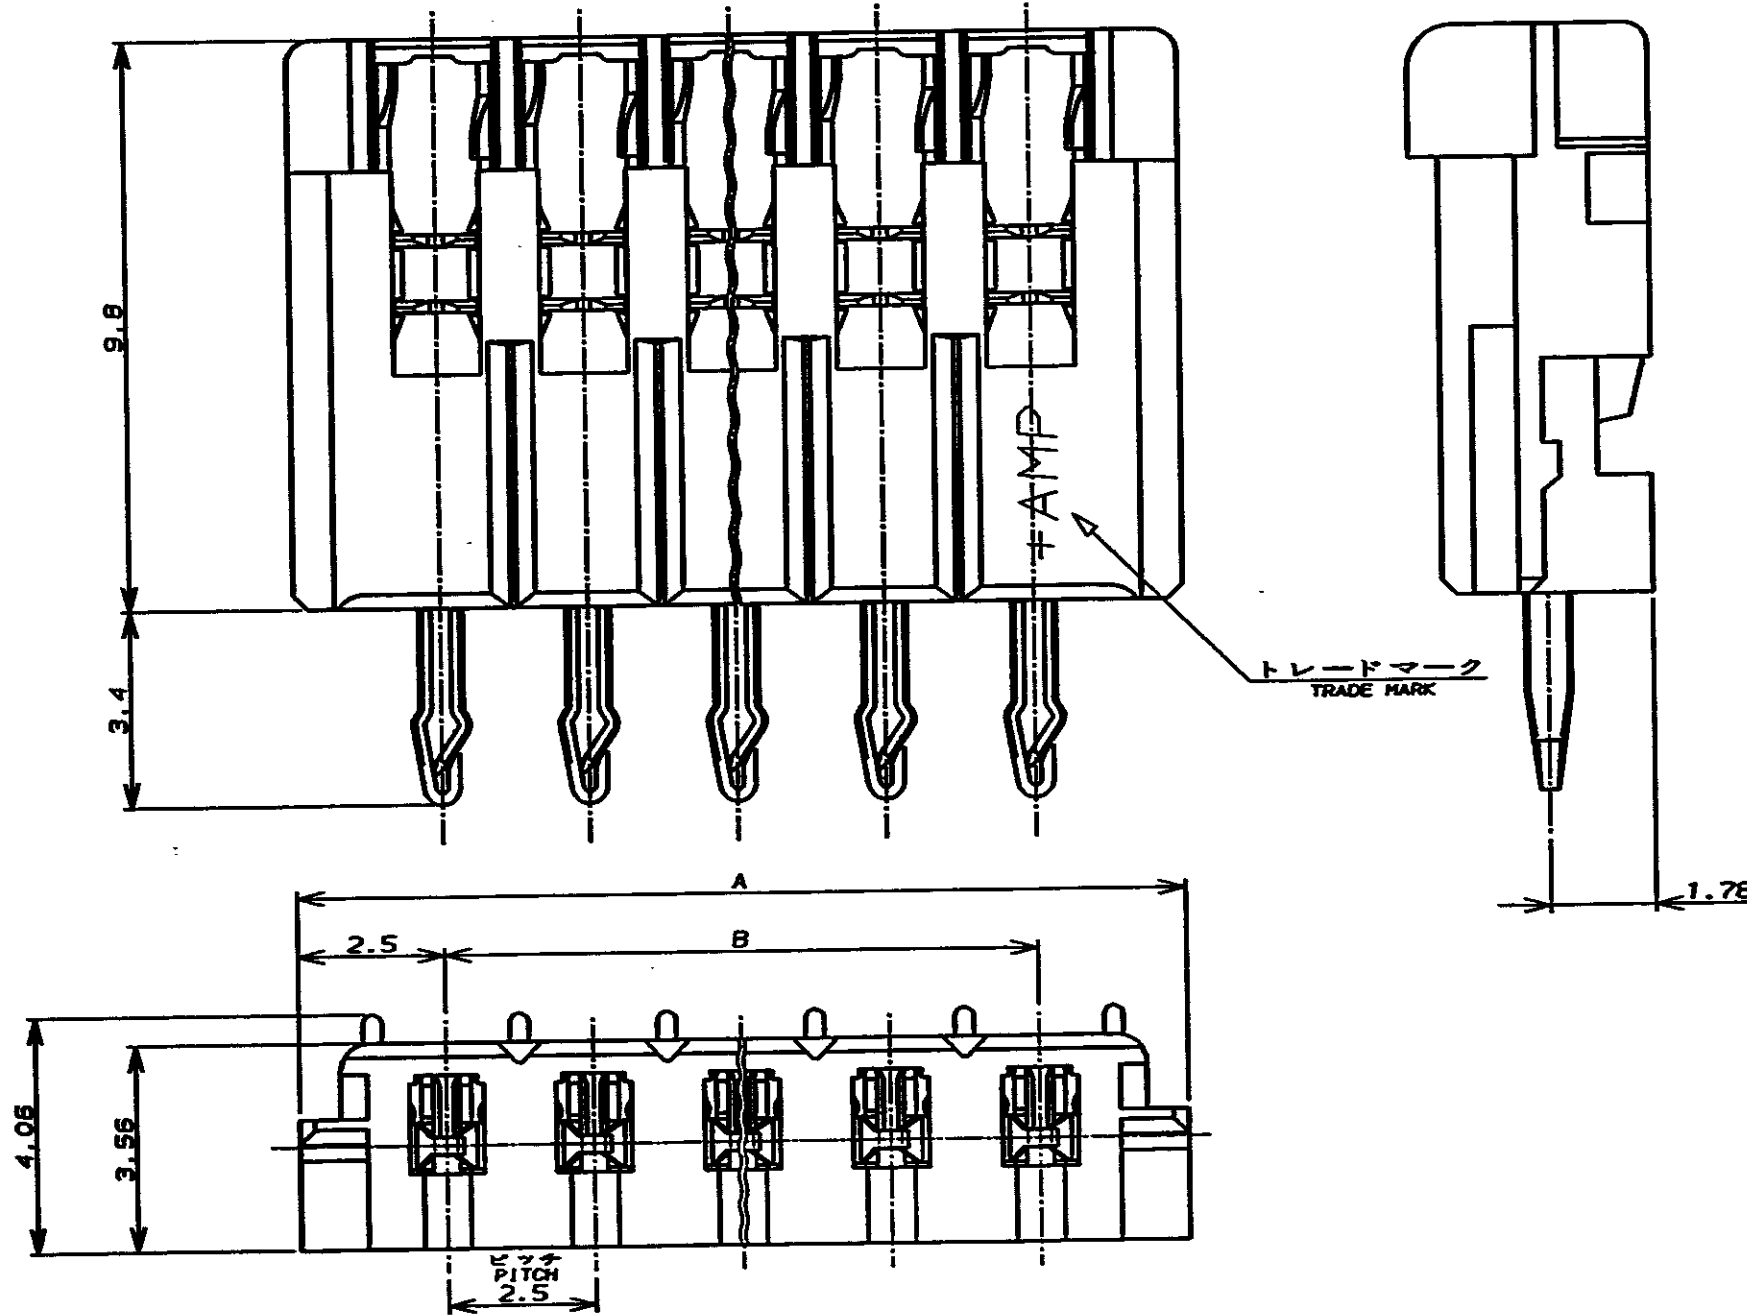


注記:

- 適用電線範囲 : AWG #24 (UL1061, UL1007)
被覆外形 : 1.0-1.5mmDIA
- 材料 : ハウジング - 66ナイロン (UL94V-0)
コンタクト - 錫メッキ済燐青銅

NOTES:

- APPLICABLE WIRE SIZE : AWG #24 (UL1061, UL1007)
INSULATION DIA : 1.0-1.5mmDIA
- MATERIAL : HOUSING - 66NYLON (UL94V-0)
CONTACT - PRE-TIN PHOS-BROZ

30.0	35.0	13	1-	-3
27.5	32.5	12	1-	-2
25.0	30.0	11	1-	-1
22.5	27.5	10	1-	-0
20.0	25.0	9		-9
17.5	22.5	8		-8
15.0	20.0	7		-7
12.5	17.5	6		-6
10.0	15.0	5		-5
7.5	12.5	4		-4
5.0	10.0	3		-3
2.5	7.5	2		179436-2
B	A	極数 Pos.	黒色 #24用 BLACK for #24 製品型番 PART No.	

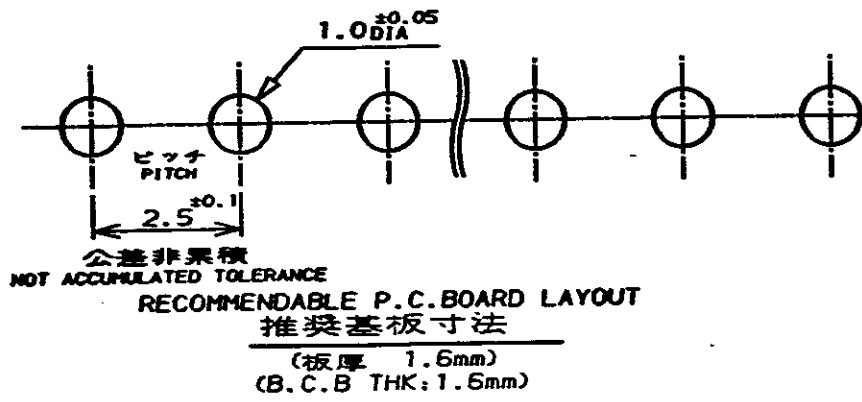

				2.5mm PITCH MIS AMP-IN for AWG #24 TYPE	
適用電線範囲 (WIRE RANGE) 注1参照 SEE NOTE 1		被覆外形 (INSULATION DIA.) 注1参照 SEE NOTE 1		名称 (NAME)	
材料 (MATERIAL) 注2参照 SEE NOTE 2		仕上 (FINISH) ZFN		一般公差 (GENERAL TOLERANCE) 100μT: ±0.2 100μEA 300μT: ±0.25 300μEA 1000μT: ±0.3 角 度: ±3°	
P REVISED PER ECO-11-005924		RK HMR 08APR11		DR. A. Ono 2/14/94 DE. A. Ono 2/14/94 CHK. J. Tsujigawa 2/10/94 APP. S. Kobayashi 2/10/94	
LTR 変更 (REVISION RECORD)		DR CHK DATE		一級公差 (GENERAL TOLERANCE) 100μT: ±0.2 100μEA 300μT: ±0.25 300μEA 1000μT: ±0.3 角 度: ±3°	
				LOC 番号 (No.) C J C-179436	
				尺度 (SCALE) 8-1	
				REV. P SHEET 1 OF 1	

(CUSTOMER DRAWING) 参考 面