



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	E	ECR-14-011707	13AUG2014	HZ RZ

1. MAXIMUM CONNECTOR INSERTION LOSS IS 0.5dB PLUS CABLE ATTENUATION OF 1.5dB/km AT 1300nm. MEASURE AGAINST A REFERENCE LEAD
2. TEST DATA PROVIDED WITH EACH ASSEMBLY.
3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702.

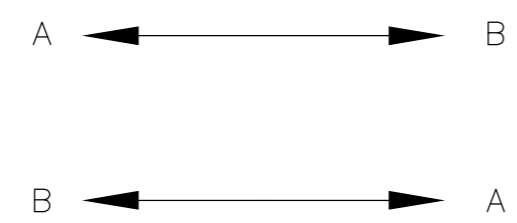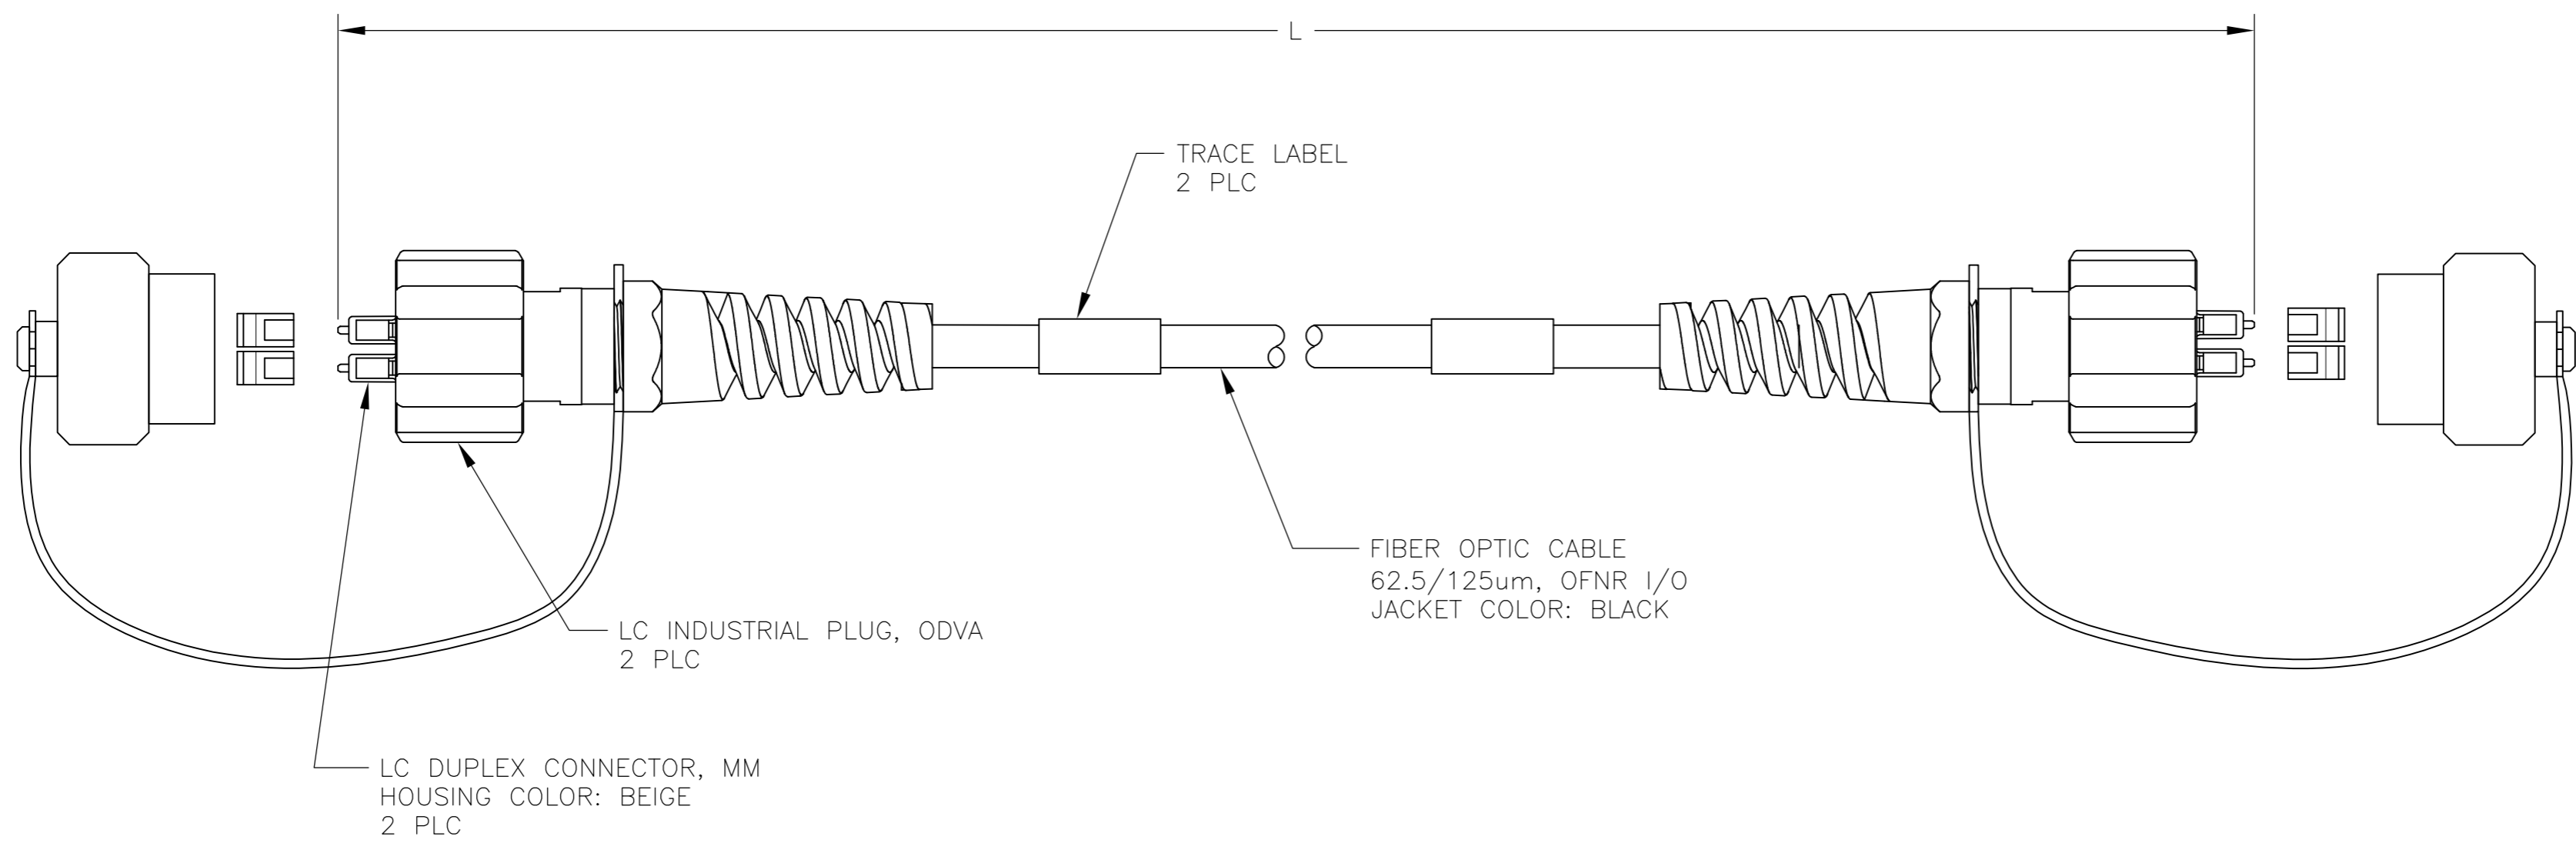

FIBER PATH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.W.DAVIS 01NOV05	TE Connectivity													
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 01NOV05														
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F.McCORKEL 01NOV05	NAME CABLE ASSEMBLY, FIBER OPTIC, 62.5/125, 2 FIBER BREAKOUT, SEALED LC DUPLEX (ODVA), BOTH ENDS													
<table border="1"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	PRODUCT SPEC -	SIZE A2	CAGE CODE 00779
0 PLC	± -															
1 PLC	± -															
2 PLC	± -															
3 PLC	± -															
4 PLC	± -															
ANGLES	± -															
MATERIAL -		FINISH -	DRAWING NO 1828935	RESTRICTED TO -												
CUSTOMER DRAWING			SCALE NTS	SHEET 1 of 2												
			REV E													

1828935

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	-	-	SEE SHEET 1	-	-	-

MAX IL (dB)	L METERS [INCHES]	PART NUMBER
1.25	500.00±5.00 [19685.0±197.0]	8-1828935-2
0.62	85.00±0.85 [3346±33]	8-1828935-1
0.65	100.00±1.00 [3937±39]	8-1828935-0
0.56	40.00±0.40 [1575±16]	4-1828935-0
0.56	39.00±0.39 [1535±15]	3-1828935-9
0.56	38.00±0.38 [1496±15]	3-1828935-8
0.56	37.00±0.37 [1457±15]	3-1828935-7
0.55	36.00±0.36 [1417±14]	3-1828935-6
0.55	35.00±0.35 [1378±14]	3-1828935-5
0.55	34.00±0.34 [1339±13]	3-1828935-4
0.55	33.00±0.33 [1299±13]	3-1828935-3
0.55	32.00±0.32 [1260±13]	3-1828935-2
0.55	31.00±0.30 [1220±12]	3-1828935-1
0.54	30.00±0.30 [1181±12]	3-1828935-0
0.54	29.00±0.30 [1141.7±12.0]	2-1828935-9
0.54	28.00±0.30 [1102.4±12.0]	2-1828935-8
0.54	27.00±0.30 [1063.0±12.0]	2-1828935-7
0.54	26.00±0.30 [1023.6±12.0]	2-1828935-6
0.54	25.00±0.30 [984.2±12.0]	2-1828935-5
0.54	24.00±0.30 [944.9±12.0]	2-1828935-4
0.53	23.00±0.30 [905.5±12.0]	2-1828935-3
0.53	22.00±0.30 [866.1±12.0]	2-1828935-2
0.53	21.00±0.30 [826.8±12.0]	2-1828935-1
0.53	20.00±0.30 [787.4±12.0]	2-1828935-0
0.53	19.00±0.30 [748.0±12.0]	1-1828935-9
0.53	18.00±0.30 [708.7±12.0]	1-1828935-8
0.53	17.00±0.30 [669.3±12.0]	1-1828935-7
0.52	16.00±0.30 [629.9±12.0]	1-1828935-6
0.52	15.00±0.30 [590.6±12.0]	1-1828935-5
0.52	14.00±0.15 [551.2±6.0]	1-1828935-4
0.52	13.00±0.15 [511.8±6.0]	1-1828935-3
0.52	12.00±0.15 [472.4±6.0]	1-1828935-2
0.52	11.00±0.15 [433.1±6.0]	1-1828935-1
0.52	10.00±0.15 [393.7±6.0]	1-1828935-0
0.51	9.00±0.15 [354.3±6.0]	1828935-9
0.51	8.00±0.08 [315.0±3.0]	1828935-8
0.51	7.00±0.08 [275.6±3.0]	1828935-7
0.51	6.00±0.08 [236.2±3.0]	1828935-6
0.51	5.00±0.08 [196.8±3.0]	1828935-5
0.51	4.00±0.05 [118.1±2.0]	1828935-4
0.50	3.00±0.05 [118.1±2.0]	1828935-3
0.50	2.00±0.05 [78.7±2.0]	1828935-2
0.50	1.00±0.05 [39.4±2.0]	1828935-1

MAX IL (dB)	L METERS [INCHES]	PART NUMBER
-------------	-------------------	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.W.DAVIS 01NOV05	<b>TE</b> TE Connectivity
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 01NOV05	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F.McCORKEL 01NOV05	CABLE ASSEMBLY, FIBER OPTIC, 62.5/125, 2 FIBER BREAKOUT, SEALED LC DUPLEX (ODVA), BOTH ENDS
0 PLC ± -		PRODUCT SPEC	
1 PLC ± -		APPLICATION SPEC	SIZE A2
2 PLC ± -		WEIGHT -	CAGE CODE 00779
3 PLC ± -		FINISH -	DRAWING NO C=1828935
4 PLC ± -		MATERIAL -	RESTRICTED TO -
ANGLES ± -		CUSTOMER DRAWING	SCALE NTS SHEET 2 OF 2 REV E