



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





AdaBox 006

Created by Tyler Cooper



Last updated on 2018-05-14 04:16:30 PM UTC

Guide Contents

Guide Contents	2
Introduction	3
Hi there!	3
Who is this for?	3
Who isn't this for?	3
Who are you?	3
Want to buy past AdaBoxes?	3
AdaBox001 - Welcome to the Feather Ecosystem	4
AdaBox002 – Making Things Move	4
AdaBox003 – The World of IoT – Curated by Digi-Key	4
AdaBox004 – Making Things Dance	4
AdaBox005 – Break for Pi	5
Unboxing AdaBox 006	6
Kit Contents	6
Other Contents	10
Getting Started with your new AdaBox	11
Getting familiar with your new Circuit Playground Express	11
Circuit Playground Express and MakeCode	12
Light Paintbrush	14
MakeCode a Magic Wand	17
NeoPixie Dust Bag with MakeCode	21
Sensors and MakeCode	23
More MakeCode Guides!	24
AdaBox 006 CircuitPython Projects	25
Get Ready, Set, SNAKE!	25
Circuit Playground Snow Globe	26
FruitBox Sequencer	27
Combo Dial Safe	28
Remote Control Tree Ornament	29
More CircuitPython Guides!	30
Redeem your coupon code	33

Introduction

Hi there!

If you're looking to subscribe to AdaBox, [click here!](#)

If you're here, it's because you were given the gift of electronics with an AdaBox! You are a beginner who is getting started with your AdaBox or you just want to relive what it's like being a beginner at electronics again. But most of all, you want to learn how to build and make stuff with electronics! (If, rather than learn electronics, you'd like to look at pictures of cats instead, please check <https://www.adafruit.com/galleries/cats-of-engineering>)

And, you're in luck: there's *never* been a better time.

Gone are the days where you need thousands of dollars of equipment and lots physics/math background. Nowadays, if you want to learn to work with electronics, you can jump right in for \$100 or less, and any sort of computer. And we're talking about learning *a lot* of electronics - from the basics of analog to the complexities of firmware. With a good pack of parts, you can build a base of knowledge that will take you from your first blinking LED to someone who can start prototyping and inventing custom products.

Who is this for?

Anyone who is interested in learning how to program and has access to a modern web browser. That's pretty much the minimum. Remember, this guide is specifically for people who have purchased or received an AdaBox subscription!

You don't need to know a lot of physics or math, and just like an Art Degree isn't required for making art and being creative, **you *don't* need to have a computer science degree**. It helps if you're comfortable using computers but that's a skill most people pick up through life.

If you know how to program already - great! If not, don't worry, we'll teach you enough to be dangerous.

Who isn't this for?

While you can follow along without an AdaBox, it will not make as much sense unless you have *all* of the components and more which either came as a gift or purchased yourself - remember, the goal is helping beginners!

If you're an expert, please visit our hundreds other tutorials and jump right in at learn.adafruit.com

Who are you?

Great question. This is me:

I'm Ladyada, and I love to teach people how to build stuff and how they can be creative with technology.

So, are you ready?

Let's do this thing!

Want to buy past AdaBoxes?



AdaBox001 - Welcome to the Feather Ecosystem

\$70.00
OUT OF STOCK


OUT OF STOCK



AdaBox002 – Making Things Move

\$79.95
IN STOCK

ADD TO CART

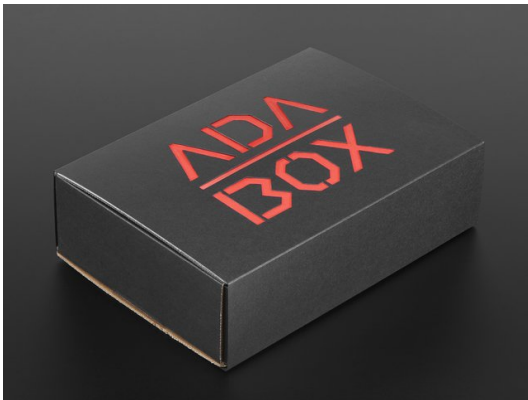

AdaBox003 – The World of IoT – Curated by Digi-Key

\$79.95
IN STOCK


ADD TO CART



AdaBox004 – Making Things Dance

\$79.95
IN STOCK

ADD TO CART

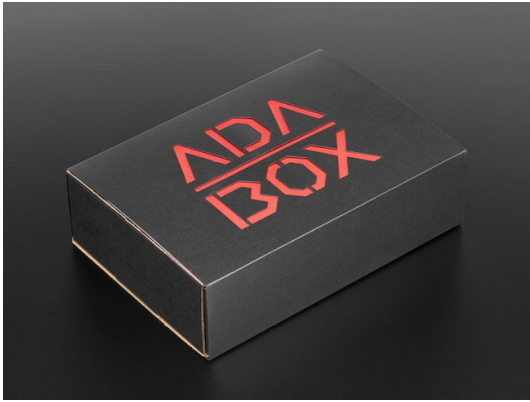

AdaBox005 – Break for Pi

\$69.95
IN STOCK

ADD TO CART


Unboxing AdaBox 006

Feeling the bite of the cold and wind outside? Why not slither indoors and snuggle up with your very own cuddly Python? What? A snake?!

Yesssssssss, this is AdaBox is Python powered!

You'll soon find yourself charmed by the power and flexibility of CircuitPython, not to mention its ease of use. And the Python strikes fast -- with no need for a compiler or IDE, you'll get your code up and running on the board quicker than ever. We think once you try it you'll be hooked by how easy it is.


Kit Contents

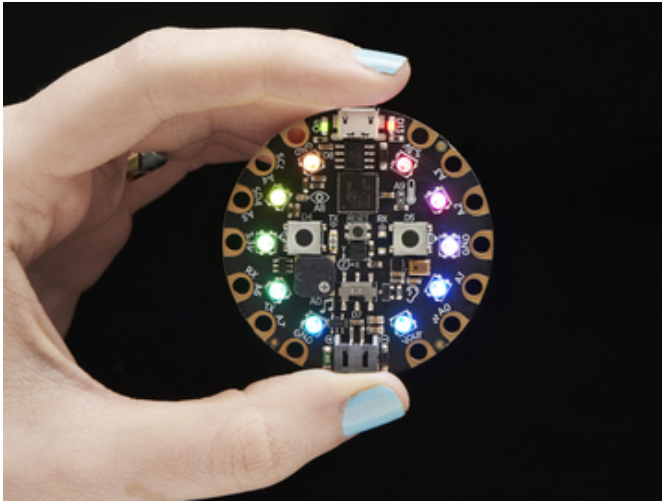

[Circuit Playground Express \(https://adafru.it/wpF\)](https://adafru.it/wpF) - the next step towards a perfect introduction to electronics and programming. We've taken the original Circuit Playground Classic and made it even better! Not only did we pack even more sensors in, we also made it even easier to program.




[USB Cable - A/MicroB \(https://adafru.it/iia\)](https://adafru.it/iia) - your standard A to micro-B USB cable, for USB 1.1 or 2.0. Perfect for connecting a PC to your Circuit Python Express.

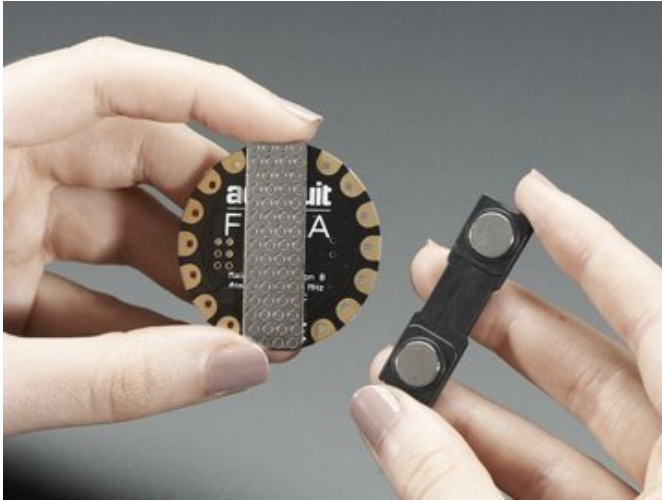

Magnetic Pin Back (<https://adafru.it/rd8>) - These magnetic pin backs have two pieces: a metal bar with adhesive strip and a plastic piece with two strong rare-earth magnets. Affix the metal bar to your wearable projects-- it's just the right size! Then attach your wearable to any garment without poking holes in your clothes. The magnets are strong enough to hold up even a hefty circuit!




Alligator Clips (<https://adafru.it/dWJ>) - Connect this to that without soldering using these handy mini alligator clip test leads. 15" cables with alligator clip on each end, color coded. You get 12 pieces in 6 colors. Strong and grippy, these always come in handy! We often use these in conjunction with a multimeter so we don't have to hold the probes in place.

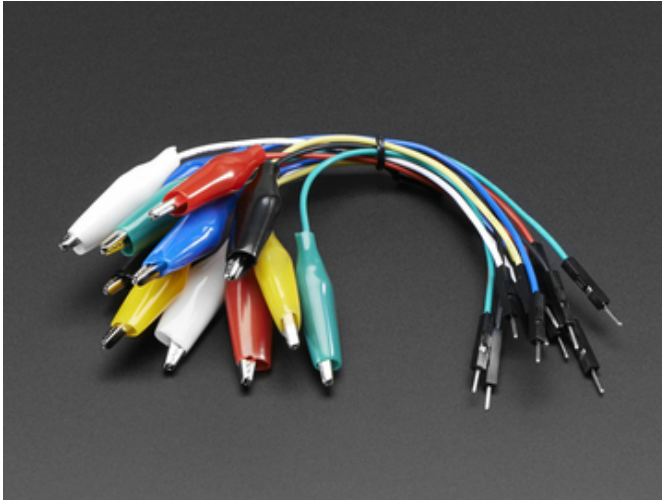


[Alligator Clips to Jumper Wires \(https://adafru.it/xAV\)](https://adafru.it/xAV)

- For bread-boarding with unusual non-header-friendly surfaces, these cables will be your best friends! No longer will you have long strands of alligator clips that are grabbing little wires. These compact jumper cables have a premium male header on one end, and a grippy mini alligator clip on the other.

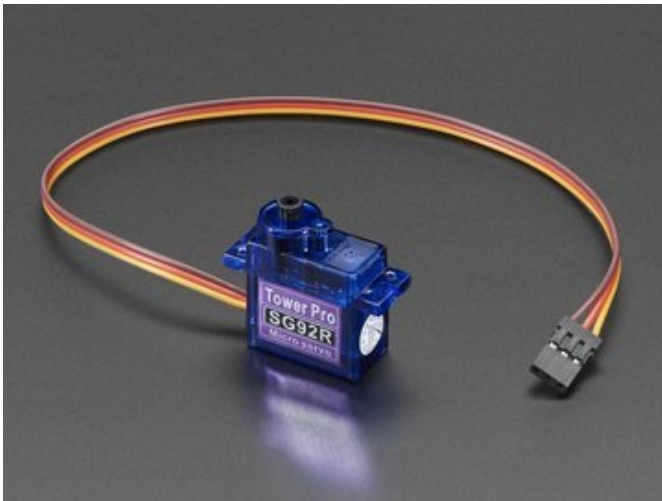

[Micro Servo \(https://adafru.it/f1g\)](https://adafru.it/f1g)

- Tiny little servo can rotate approximately 180 degrees (90 in each direction), and works just like the standard kinds you're used to but *smaller*. You can use any servo code, hardware or library to control these servos.

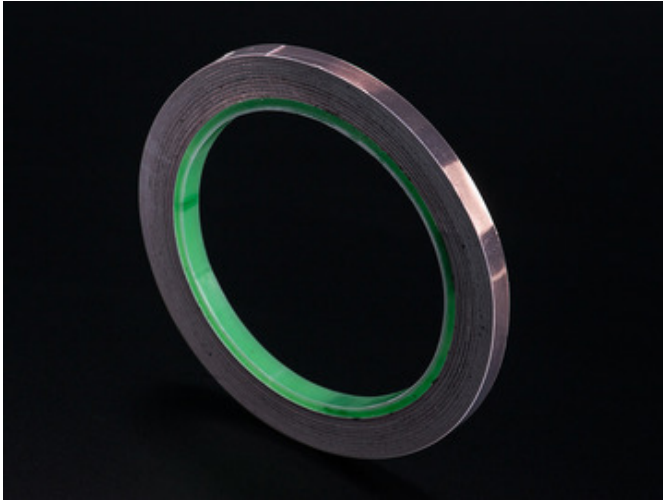


[Copper Foil Tape \(https://adafru.it/eNZ\)](https://adafru.it/eNZ) - Copper tape can be an interesting addition to your toolbox. The tape itself is made of thin pure copper so its extremely flexible and can take on nearly any shape. You can easily solder to it, and the tape itself can carry current just like a wire. On the back is an electrically conductive adhesive. The adhesive can't carry significant current but it is very handy for sensing applications where you don't want to solder the copper tape.




[Mini Remote Control \(https://adafru.it/xck\)](https://adafru.it/xck) - This little remote control would be handy for controlling a robot or other project from across the room. It has 21 buttons and a layout we thought was handy: directional buttons and number entry buttons.



[Panel Mount 10K Potentiometer \(https://adafru.it/dzq\)](https://adafru.it/dzq) - This potentiometer is a two-in-one, good in a breadboard or with a panel. It's a fairly standard linear taper 10K ohm potentiometer, with a grippy shaft. It's smooth and easy to turn, but not so loose that it will shift on its own.

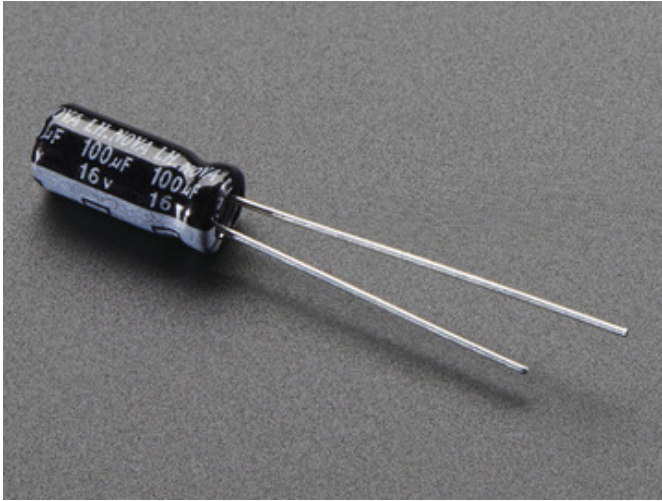

100uF electrolytic capacitor - used for when you want to remove DC offset from analog output so you can listen to it with headphones! (<https://adafru.it/Akl>)

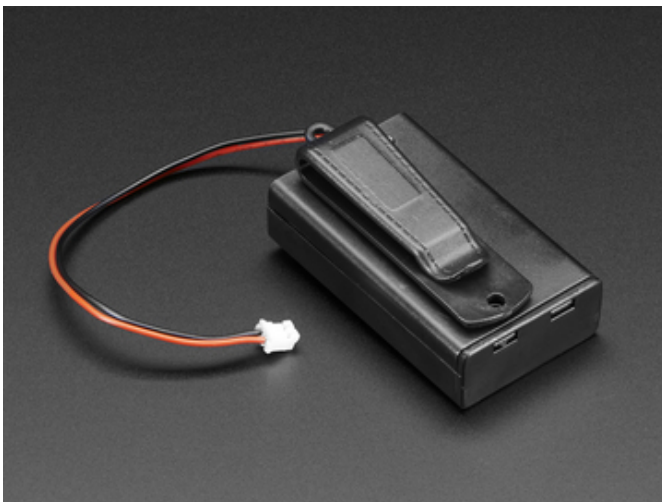

AAA Battery Holder w/ Belt Clip (<https://adafru.it/Ahj>)
- This battery holder connects 3 AAA batteries together in series for powering all kinds of projects. We spec'd these out because the box is slim, and 3 AAA's add up to about 3.3-4.5V, a very similar range to Lithium Ion/polymer (Li-Ion) batteries, plus it has a nifty on-off switch.



AAA Batteries (<https://adafru.it/Ahk>)




JST Battery Extension Cable (<https://adafru.it/doS>)

Other Contents

- Crafting Supplies
- Adafruit Collectible Pin (subscription only!)

Getting Started with your new AdaBox

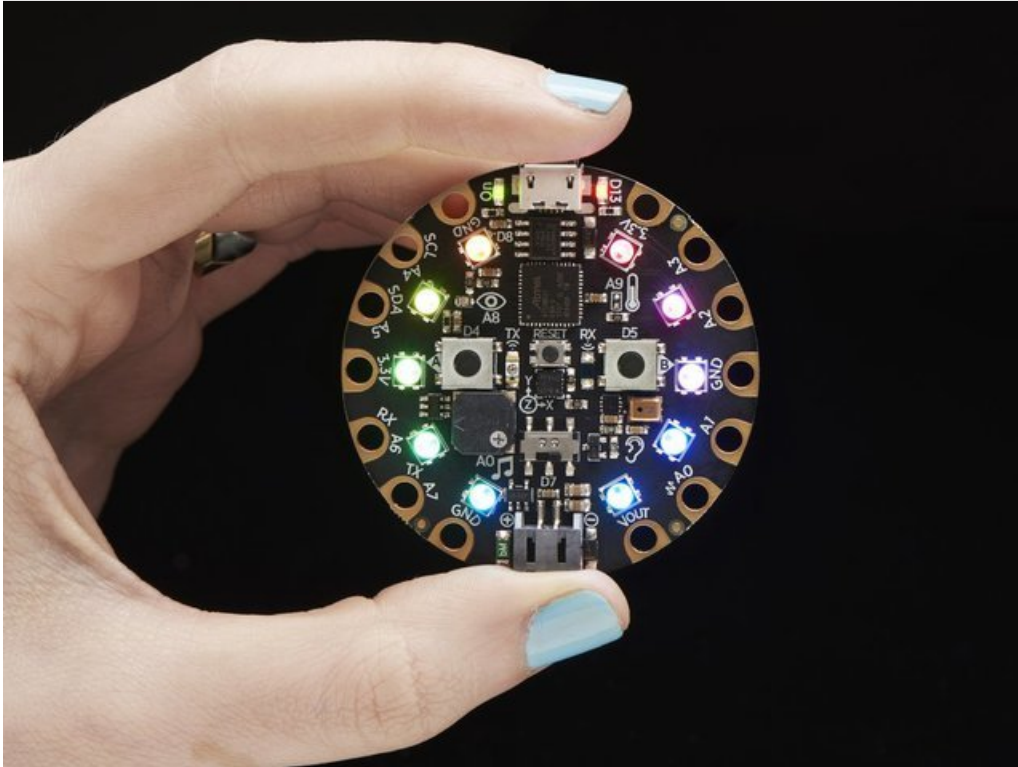

The heart of AdaBox 006 is the Circuit Playground Express. This little board is the next step towards a perfect introduction to electronics and programming. We've taken the original Circuit Playground Classic and made it even better! Not only did we pack even more sensors in, we also made it even easier to program.

Start your journey with [Microsoft MakeCode block-based or Javascript programming](#). Then, you can use the same board to try [CircuitPython](#), with the Python interpreter running right on the Express. As you progress, you can advance to using [Arduino IDE](#), which has full support of all the hardware down to the low level, so you can make powerful projects.

Because you can program the same board in 3 different ways - the Express has great value and re-usability. From beginners to experts, Circuit Playground Express has something for everyone

Getting familiar with your new Circuit Playground Express


Before we dive into the fun projects we designed specifically for AdaBox 006, let's get to know the Circuit Playground Express (CPX) a little bit better. Click the button below to check out the guide that will teach you all about your new CPX, and how to get it connected to your computer. Then come back to this guide for more.

<https://adafru.it/AgP>

<https://adafru.it/AgP>

Once you have gone through the CPX Guide, in particular the 'setup' part with any drivers and guided tour, come back here! It is time to put your CPX to work with these quick and easy guides. Let's get started...

Circuit Playground Express and MakeCode

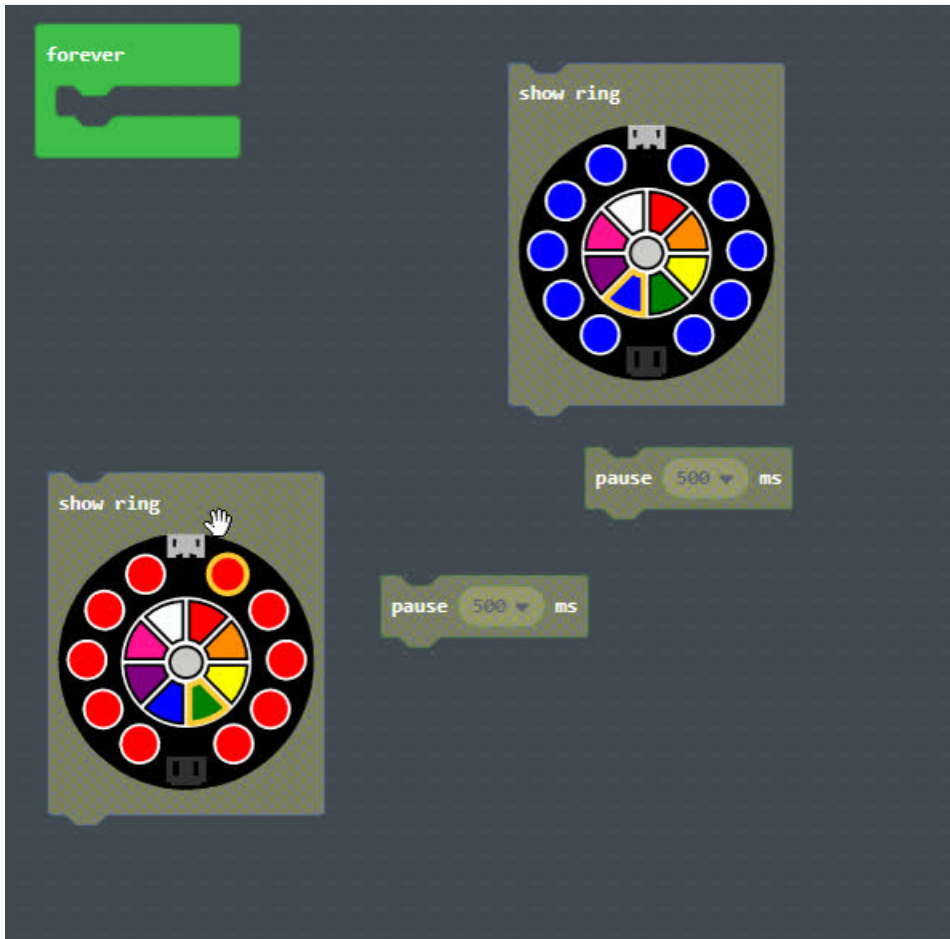

Microsoft MakeCode for Adafruit is a web-based code editor for physical computing. It provides a block editor, similar to Scratch or Code.org, and also a JavaScript editor for more advanced users. **Try it now** at <https://makecode.adafruit.com/> !

Some of the key features of MakeCode are:

- **web based editor:** nothing to install
- **cross platform:** works in [most modern browsers](#) from tiny phone to giant touch screens
- **compilation in the browser:** the compiler runs in your browser, it's fast and works offline
- **blocks + JavaScript:** drag and drop blocks or type JavaScript, MakeCode let's you go back and forth between the two.
- **works offline:** once you've loaded the editor, it stays cached in your browser.
- **event based runtime:** easily respond to button clicks, shake gestures and more

MakeCode currently supports the **Adafruit Circuit Playground Express** using any web browser on Mac, Windows, Linux, or ChromeOS. You cannot use iOS or Android on a mobile device (since you can't plug in a USB Key)

<https://adafru.it/AgQ>

<https://adafru.it/AgQ>

Light Paintbrush


Here's a really fun and beautiful project you can create using your Circuit Playground Express and MakeCode: The Light Paintbrush!




It's a long exposure photography technique where you can "paint" streaks of light into a image. Check out the guide and build your own!


<https://adafru.it/Aho>

<https://adafru.it/Aho>

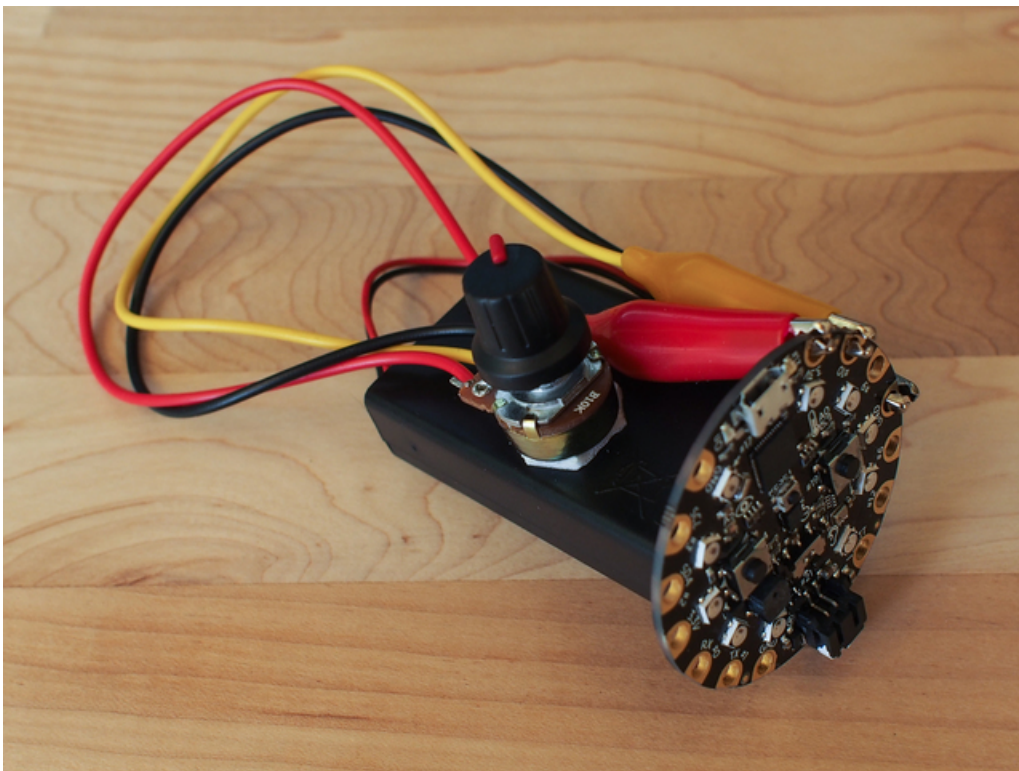

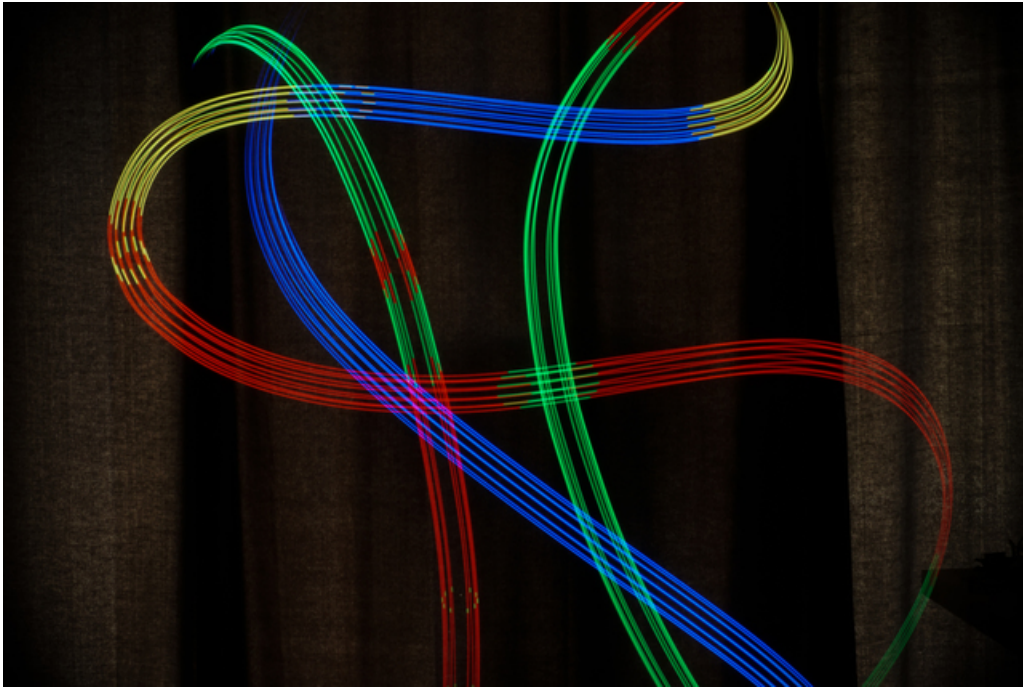

MakeCode a Magic Wand

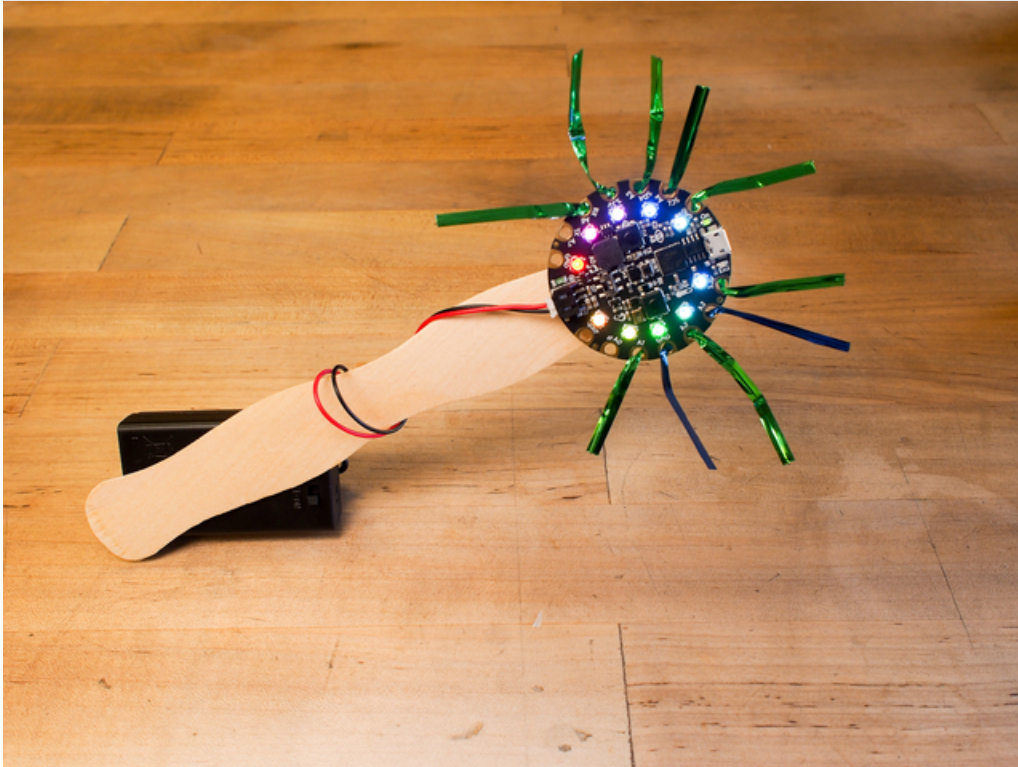



You can make your very own magic wand that has reactive lights and sounds using Make:Code on the Circuit Playground Express! The craft supplies included in the kit will allow you to make the wand, and you can customize it as you like with paint, glue, glitter, googly eye, you name it!


You can use the photos on this page as a launching off point for your creation, and then head to the Sword & Wand project guide for coding!

<https://adafru.it/Ahf>

<https://adafru.it/Ahf>

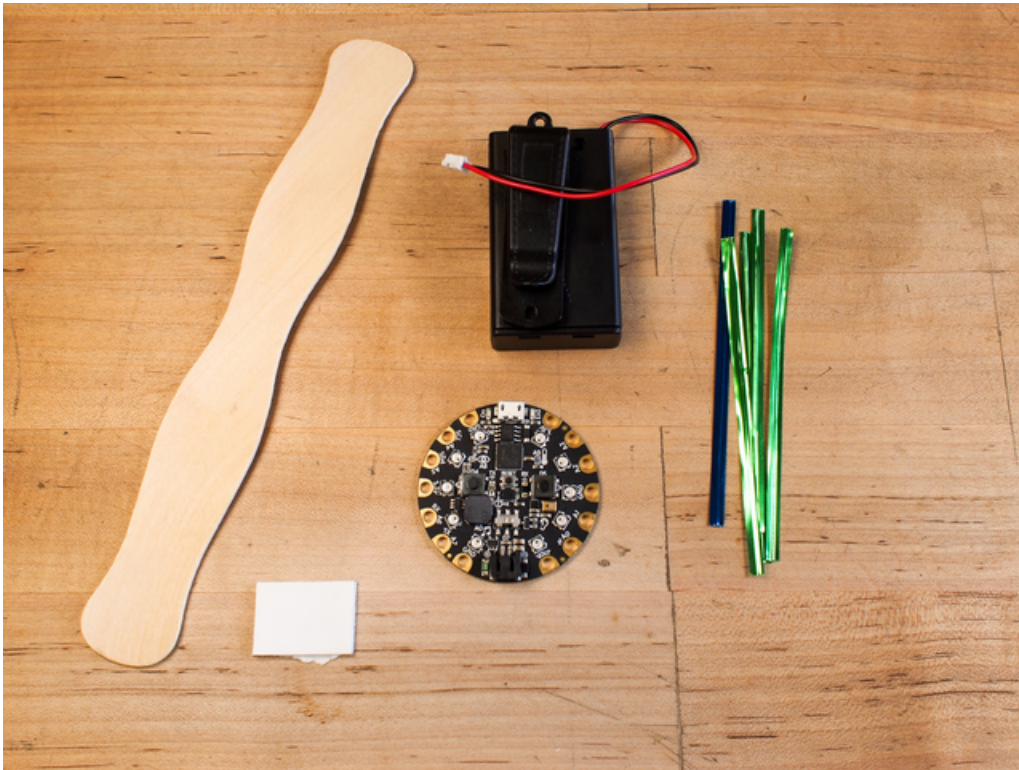

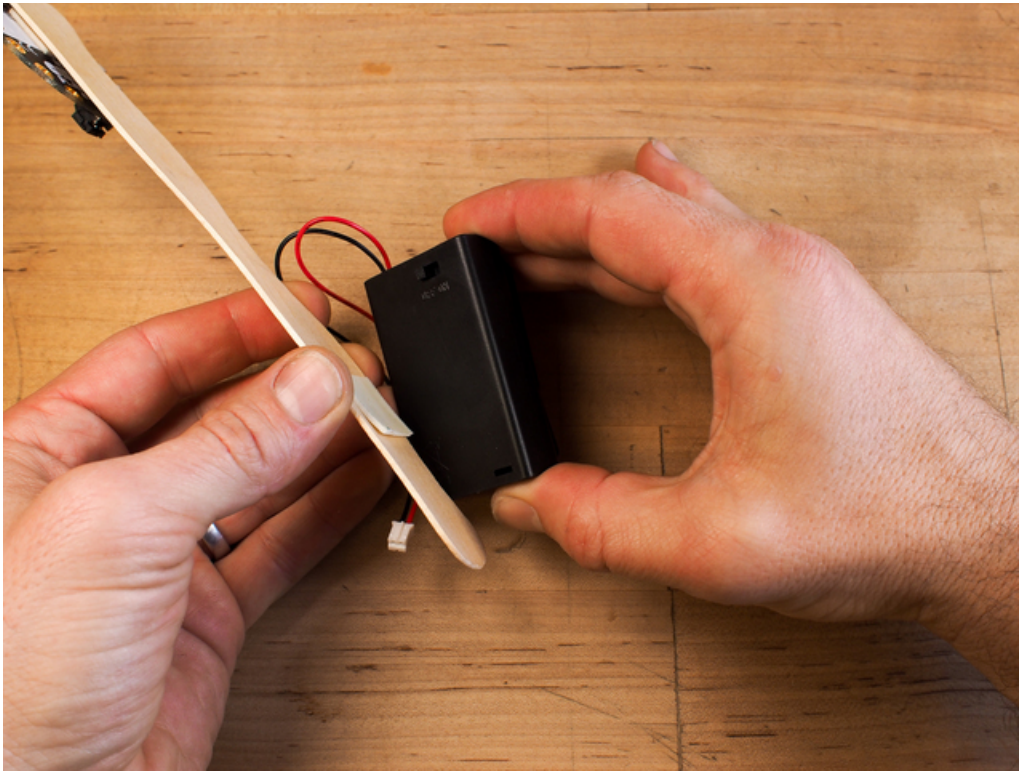

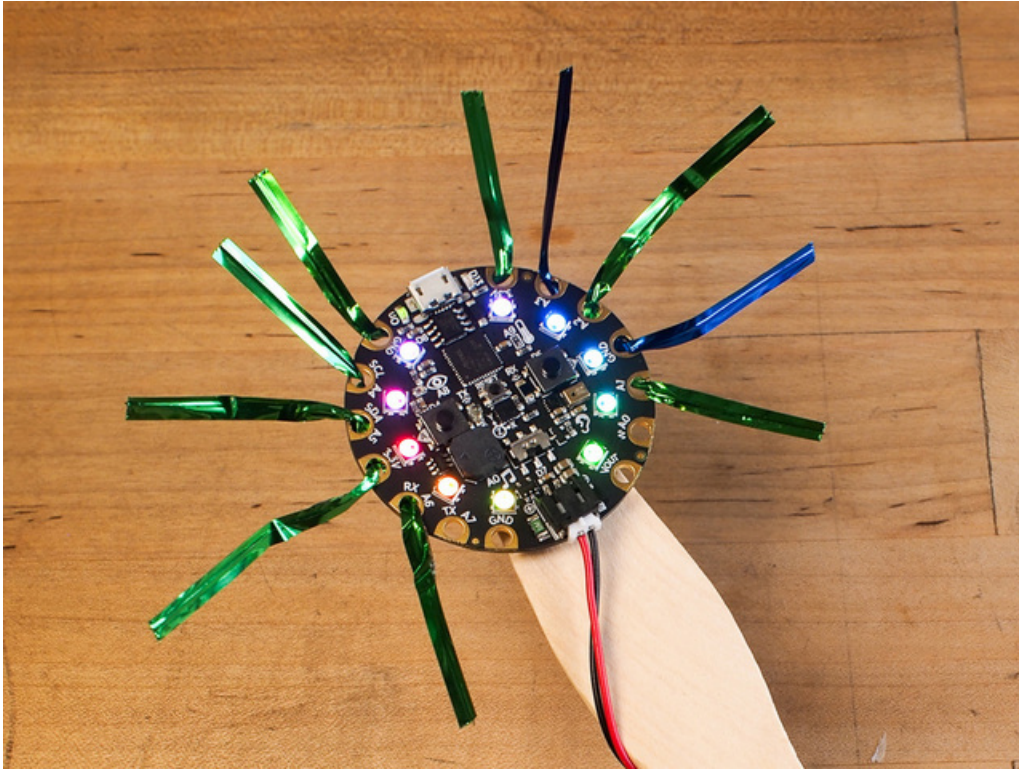

NeoPixie Dust Bag with MakeCode



How can your fairy costume be complete without a glowing pixie dust bag?! It sparkles and blinks, and you can squeeze the touch sensor wire to change the colors on the beautifully twinkling NeoPixel ring! This fun, sophisticated-looking prop is easy to build with absolutely no soldering required.




You can program it all with the fun and simple graphical interface of MakeCode, right in your browser. Head to the project Learn Guide page to get started!

<https://adafru.it/Ahq>

<https://adafru.it/Ahq>

Sensors and MakeCode

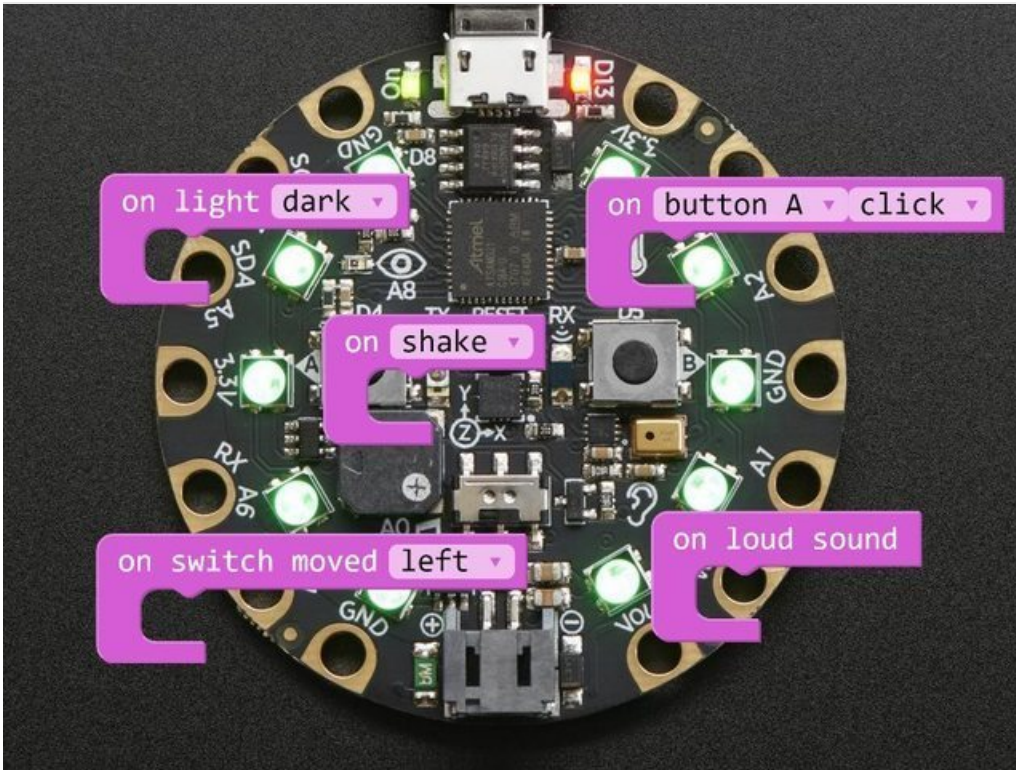

The Adafruit Circuit Playground Express comes packed with built-in sensors. This guide will show you how to leverage them in Microsoft MakeCode. Before you dive into this guide, make sure you have gone through [the previous guide](#).

<https://adafru.it/Ahp>

<https://adafru.it/Ahp>

More MakeCode Guides!



Because the Circuit Playground Express is packed with so many sensors, there is an endless amount of projects you can create. The Adafruit Learning System has many more guides for you to try out. [Check out the MakeCode category](#) to find inspiration for your next project.

MakeCode also has built in tutorials and guides for many more crafty projects. Click on the **Projects** button to unlock the projects!

