



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REV. NO.	031-7425		
REV.	DATE	BY	APP.
A	27635 8/2/12		
REVISED & UPDATED			

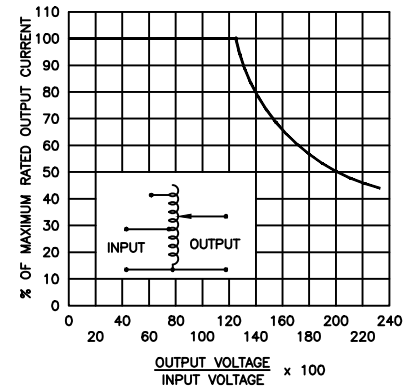
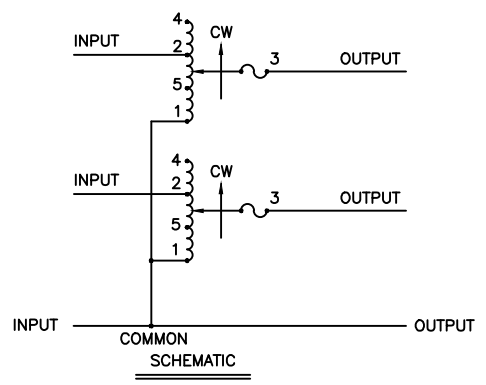
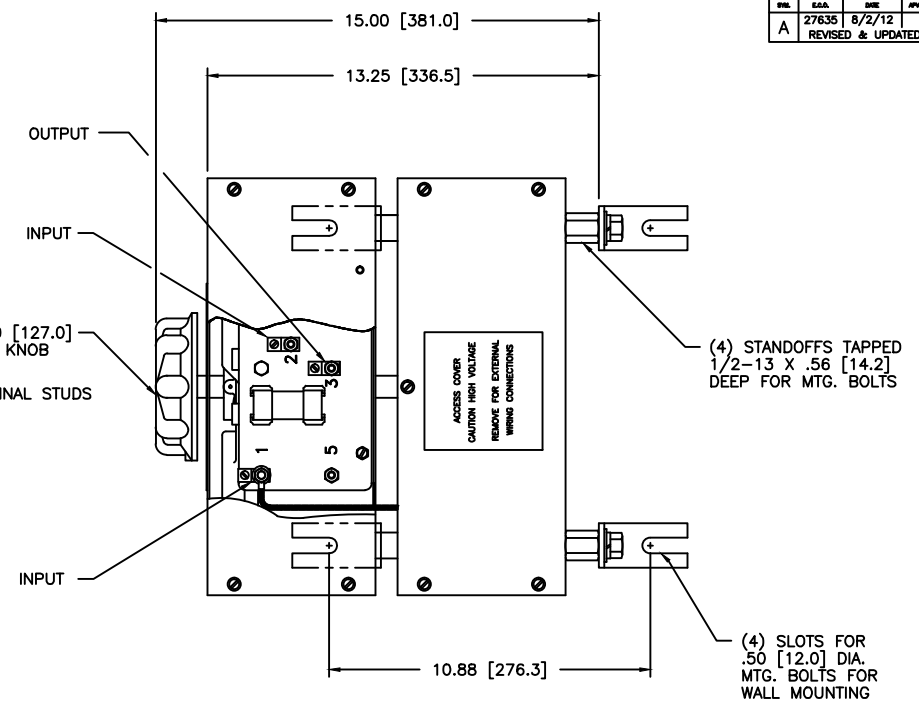
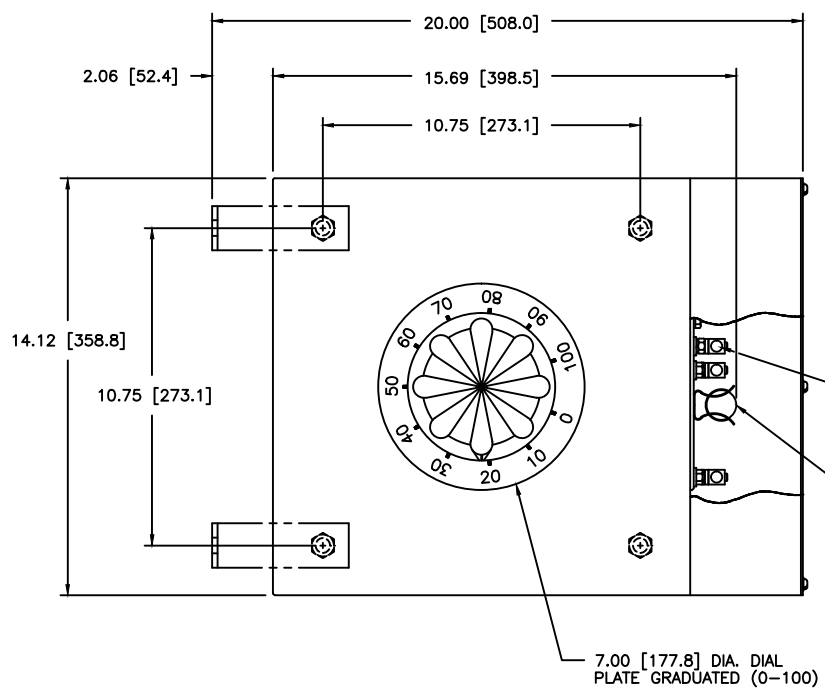


FIGURE A
MAXIMUM OUTPUT CURRENT OF ANY DUAL INPUT VOLTAGE OR VOLTAGE DOUBLER UNIT OPERATED AT LOWER INPUT VOLTAGE.

* MAXIMUM OUTPUT CURRENT IN OUTPUT VOLTAGE RANGE FROM 0 TO 25 PERCENT ABOVE LINE VOLTAGE. AT HIGHER OUTPUT VOLTAGES, OUTPUT CURRENT MUST BE REDUCED ACCORDING TO RATING CURVE (SEE FIGURE A).
++ MAXIMUM KVA AT MAXIMUM OUTPUT AND CORRESPONDING DE-RATED CURRENT. MAXIMUM KVA AT LOWER OUTPUT VOLTAGES MAY BE CALCULATED FROM RATING CURVE, (SEE FIGURE A).
V.D. = VOLTAGE DOUBLER.

SPECIFICATIONS								
WIRING	INPUT		OUTPUT		SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS		
	VOLTS	HERTZ	VOLTS	MAX. AMPS		MAX. KVA	FOR INCREASING VOLTAGE AS VIEWED FROM ROTOR END	
						INPUT	JUMPER	OUTPUT
THREE PHASE OPEN DELTA	240	50/60	0-240	28	11.6	CW	4-1-4	3-1-3
			0-280	28	13.6	CW	2-1-2	3-1-3
	120	50/60	0-280	28-12 V.D.	5.8 ±	CW	5-1-5	3-1-3

<small>UNLESS OTHERWISE SPECIFIED, TOLERANCES IN A DRAWING ARE: DIMENSIONS AS SHOWN: FRACTIONS: ±.005 DECIMALS: ±.005 ANGLES: ±.05° HOLE POSITION: ±.010 HOLE DIAMETER: ±.005</small>	<small>ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED ARE IN INCHES</small>	SPEC. CONTROL DRAWING VARIABLE TRANSFORMER TYPE: 5021CT-2D	
<small>The information and design disclosed herein are confidential and are the property of STACO ENERGY PRODUCTS CO. which reserves all rights in and to the same. No part of this information may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of STACO ENERGY PRODUCTS CO. The foregoing does not apply to standard proprietary parts.</small>	<small>DESIGNED BY</small> TIM RAU <small>CHECKED BY</small> DWC <small>DATE</small> 3/7/97	<small>DATE</small> 3/7/97 <small>PRINTED ON</small> DWC <small>SCALE</small> 1:1 <small>DRWG. NO.</small> 83008 <small>SHEET</small> 1 OF 1	<small>REV. NO.</small> D 031-7425